City of Watertown

Proposed City Council Agenda City Hall, 23 2ND ST NE Watertown, South Dakota June 3, 2024, 5:30 PM



			Page
1.	CALI	. TO ORDER	
2.	PRA	YER	
3.	PLEC	OGE OF ALLEGIANCE	
4.	ROL	L CALL	
5.	ACT	ON TO APPROVE THE AGENDA	
6.	OPE	N FORUM	
7.	CON	SENT AGENDA	
	(a)	Approval of the minutes of the Council meeting held on May 20th, 2024. <u>City Council - May 20 2024 - Minutes</u>	4 - 6
	(b)	Approval of the 2024 Parks, Recreation & Forestry Volunteers. Approval of the 2024 Parks, Recreation & Forestry Volunteers	7 - 8
	(c)	Authorization for Watertown Fire Rescue to declare Medic 4 Ambulance as surplus and then trade-in at Premiere Specialty Vehicles. <u>Ambulance Surplus</u>	9 - 10
	(d)	Authorization for the Police Department to make advanced payment to Innovative Timing Systems in the amount of \$25,293.00 for the DASH Timing System.	11 - 12
		Advanced Payment to Innovative Timing Systems	
	(e)	Authorization for the Police Department to transfer \$20,000 from 2024 CIP to vehicle equipment line.	13 - 14
		<u>CIP Transfer</u>	
	(f)	Authorization to transfer the Event Date of a Special Event Malt Beverage Retailer's License & Special Event Retail Wine License for the Watertown Area Chamber of Commerce d/b/a Watertown Area Chamber of Commerce for the Wine & Beer Walk, 1 East Kemp Ave, Lots 18-20 & 21-22 & N18' E24' Block 4 Original Plat from Thursday, May 30th, 2024 to Thursday, June 6th, 2024. Wine & Beer Walk	15 - 21
	(g)	Approval of bills and payroll and authorization to pay	

8. PRESENTATIONS & REPORTS

(a) State of the City Address

9. CONTRACTS & CHANGE ORDERS

- 22 26 (a) Approval of Professional Services Agreement Amendment No. 1 with TEGRA Group Inc., for Owner's Representative Services related to the Wastewater Treatment Facility Improvements, Project No. 2317, in the amount of \$607,126.00. Amendment No 1 with TEGRA (b) Approval of Amendment No. 3 with Rice Lake, Construction Manager At-Risk 27 - 55 for the Wastewater Collection System and Treatment Facilities Improvements, Project No. 2317, in the amount of \$27,833,041.00 and authorization for Rice Lake to proceed with construction services for a Guaranteed Maximum Price (GMP) of \$48,633,277.00. Amendment to Rice Lake Construction Contract (c) Approval of Change Order No. 1 for the 2024 Solid Waste Pavement 56 - 61 Rehabilitation, Project No. 2412, with Duininck Inc., for an increase of \$156,496.00 for a new contract price of \$423,796.00. Change Order No. 1 with Duininck Inc. (d) Approval of a Bid Award for the 2024 Golf Course Improvements, Project No. 62 - 642420, to Creative Vision Landscape and Design in the amount of \$128,800.00. Bid Award for the 2024 Golf Course Improvements, Project No. 2420 (e) Approval of Quote Awards to multiple vendors for the Information 65 - 206Technology, Audio & Video, and Data Cabling and Networking packages for the Wells Fargo Renovation and Addition for City Hall, Project No. 2035, in the total amount of \$329,925.87.
- 10. ORDINANCE FIRST READINGS
- 11. PUBLIC HEARINGS & SECOND READINGS

Information Technology Quote Awards

- 12. OTHER BUSINESS
- 13. CITY COUNCIL MEMBER ANNOUNCEMENTS AND INTRODUCTION OF TOPICS FOR FUTURE DISCUSSION
- 14. CITY MANAGER REPORT
- 15. EXECUTIVE SESSION PURSUANT TO SDCL 1-25-2
- 16. ADJOURNMENT

Kristen Bobzien Chief Financial Officer

The City of Watertown, South Dakota does not discriminate on the basis of race, color, national origin, sex, religion, age or disability in employment or the provision of services. ADA Compliance:

The City of Watertown fully subscribes to the provisions of the Americans with Disabilities Act. If you desire to attend this public meeting and are in need of special accommodations, please notify the City Finance Office 24 hours prior to the meeting so that appropriate auxiliary aids and services are available.

Agenda Item 7.(a) Approval of the minutes of the Council meeting held on...

Watertown City Council Meeting Minutes May 20, 2024

The City Council met in regular session at 5:30 PM in the City Hall Council Chambers, 23 2ND ST NE. Mayor Ried Holien presiding.

Present upon roll call: Alderperson Danforth, Jurrens, Schutte, Tupper, Buhler and Mayor Holien. Absent: Alderperson Peters.

Motion by Danforth, seconded by Buhler, to approve the agenda as presented. Items approved as part of the consent agenda: minutes of the Council meeting held on May 6, 2024; the April 2024 Park & Recreation Volunteers; renewal of Retail (on-off Sale) Malt Beverage & SD Farm Wine Licenses for the Period of July 1, 2024 to June 30, 2025; a Business License to Scenic Sign Corp as a Sign Installer (\$250.00); a Business License to Dan's Excavating as a Pipe Layer (\$250); a Business License to Wheelhouse Plumbing, Inc as a Gasfitting Contractor (\$250) and Trevor Wheelhouse and Tyler Gabriel as a Gasfitter (\$75/each); authorization for the Park and Recreation Department to apply for the 2024 South Dakota Department of Health West Nile Virus Prevention Grant and authorize the City Manager to sign all related documents to the grant including acceptance of the grant; authorization for the Finance Officer to sign the engagement letter with Van Iwaarden Associates for Actuarial Services for 2024 and 2025. Motion Carried.

RETAIL (ON-OFF SALE) MALT BEVERAGE & SD FARM WINE LICENSE RENEWALS FOR PERIOD JULY 1, 2024 TO JUNE 30, 2025

- 1. 1906 LLC, 1906, 218 E Kemp Ave, The W20' of the E110' Lots 1-3, Block 11, Original Plat
- 2. Aldi, Aldi #111, 2822 8th Ave SE, Lot 4, Block 1 of East Park 2nd Addition
- 3. BMG Inc, Ringo's, 520 10th St NW, N110' of Lots 11-13, N110' of E20' of Lot 14, Blk 3, Davis Addn
- 4. Dolgen Midwest, LLC d/b/a Dollar General Stores #21569, 1010 4th St NE, Lot 1 Watertown Dollar General Addition
- 5. Dolgen Midwest, LLC d/b/a Dollar General Stores #21951, 3224 9th Ave SW, Lot 1A in Lot 1 in Block 1 of Isabella First Addition to the Municipality of Watertown, in the County of Codington, South Dakota

Mayor Holien called for Open Forum. No comments.

Motion by Tupper, seconded by Schutte, to approve a Bid Award for the 2024 Pickleball Facility, Project No. 2408, to Timmons Construction Inc. in the amount of \$526,280.02. City Council directed staff to pursue adding wind-screens, water and electrical to the project while keeping the Council informed of the additional cost. City Council also desires having a formal agreement with the Watertown Pickleball Association to address a plan and cost share. Motion Carried.

Motion by Buhler, seconded by Danforth, to approve a Bid Award for the 2024 Park & Recreation Fence Improvements, Project No. 2409-B, to LT Companies Inc. in the amount of \$155,984.40. Motion Carried.

Agenda Item 7.(a) Approval of the minutes of the Council meeting held on...

Motion by Jurrens, seconded by Tupper, to approve an Agreement for Transportation Alternatives Funding with the South Dakota Department of Transportation for the Lake Kampeska Bike Trail-Segment 2, Project No. 2421. Motion Carried.

Motion by Danforth, seconded by Jurrens, to approve a Professional Services Agreement for Environmental Review, Survey, and Design services associated with the Private Hangar Area, Project No. AIP 3-46-0058-04-202, with Helms and Associates Corporation, in the amount of \$49,300.21. Motion Carried.

This being the time scheduled for the public hearing on the Special Event Malt Beverage Retailer's License & Special Event Retail Wine License to Watertown Area Chamber of Commerce d/b/a Watertown Area Chamber of Commerce for Cookin' on Kampeska, 1 East Kemp Ave, Portion of the north 40 rods of Government Lot 1, of Fractional Section 22-117N-53W, which is west of a line which begins at a point 450' west of the northeast corner of section 22 and is on the north section line of section 22, and ends at a point 625' west of the east section line of section 22 and is on a line which is 40 rods south of the north section line of section 22 from 6:00 PM on Thursday, July 18th to 11:59 PM on Saturday, July 20th, 2024; the Mayor called for public comment. Hearing no comments from the public, motion by Tupper, seconded by Buhler, to approve the application as presented. Motion Carried.

Ordinance No. 24-04, a Zoning Text Amendment to Chapter 25.06 Locations and Special Use Provisions for Medical Cannabis Establishments for Fencing Requirements of the Revised Ordinances of the City of Watertown was placed on its second reading and the title was read. This being the time and place for a public hearing on Ordinance No. 24-04, the Mayor called for public comment. Bob West spoke in favor of the Ordinance amendment. Hearing no further comments from the public, motion by Danforth, seconded by Schutte, to approve Ordinance No. 24-01 as presented. Motion Carried.

Ordinance No. 24-05, Amending Section 2.0118.2 Regarding Special Alcoholic Beverage Licenses in Conjunction with Special Events was placed on its second reading and the title was read. Motion by Buhler, seconded by Jurrens, to approve Ordinance No. 24-05 as presented. Motion Carried.

Motion by Tupper, seconded by Danforth, to approve the Weekly Seasonal Event Retail On-Sale License to The Shamrocks & Edelweiss Corp d/b/a Dempsey's Brewery Pub & Restaurant for Thursday Night Live, 225 E Kemp, Downtown Plaza and that portion of Kemp Ave adjacent to Downtown Plaza for the duration of the 2024 Thursday Night Live Season. Motion Carried.

Motion by Tupper, seconded by Schutte, to authorize the Police Department to hire a "Plus One" full-time permanent officer due to staff shortages. Motion Carried.

Motion by Danforth, seconded by Buhler, to supplement the WPD Budget by \$25,462.00 for the Purchase of a DASH Race Timing System to Support Youth and Drug Abuse Prevention Programs. Motion Carried.

Library Director, Maria Gruener, provided details of items that may be checked-out from the Watertown Regional Library. Items include: zoo passes, state park passes, musical instruments, bikes, pickleball sets, tennis rackets and much more.

Mayor Holien stated the Watertown Convention and Visitors Bureau has completed their strategic planning and will provide a presentation to City Council in the near future.

Agenda Item 7.(a) Approval of the minutes of the Council meeting held on... Mayor Holien announced the Watertown Convention and Visitors Bureau will have their Awards Banquet at the Redlin Pavilion on Wednesday, May 22nd at noon. Mayor Holien stated the Watertown Development Company has also finished their strategic planning session. Mayor Holien stated the Lake Kampeska Board recently held their annual meeting and the City was well represented. Alderperson Tupper stated he is working on obtaining donations for this year's fireworks display. City Manager Mack stated the H20-250 Group has officially formed and they have launched an online survey. City Manager Mack stated last week was Police Week while this week is EMS Week as well as Public Works Week. City Manager Mack stated there will be a Groundbreaking Ceremony for the New City Hall Building on Friday, May 24th at 10:00 AM. E911 Officer, Angie Schaeffer, was recognized for earning her Bachelor's Degree while Community Development Manager, Brandi Hanten, was recognized for becoming AICP Certified. Motion by Tupper, seconded by Danforth, to go in to Executive Session for the purpose of discussing contractual and personnel issues. Motion Carried. Motion by Danforth, seconded by Schutte, to adjourn until 5:30 PM on Monday, June 3rd, 2024. Motion Carried. The City of Watertown, South Dakota does not discriminate on the basis of race, color, national origin, sex, religion, age, or disability in employment or the provision of service. Dated at Watertown, South Dakota, May 20th, 2024.

Ried Holien, Mayor

ATTEST:

Kristen Bobzien, Chief Financial Officer

Agenda Item 7.(b) Approval of the 2024 Parks, Recreation & Forestry Volu...



City Council

Agenda Item

Subject: Approval of the 2024 Parks, Recreation & Forestry Volunteers.

Meeting: City Council - Jun 03 2024

From: Dusty Rodiek, Director of Parks, Recreations & Forestry

BACKGROUND INFORMATION:

The Park & Recreation Department seeks approval from the City Council for the attached list of volunteers.

FINANCIAL CONSIDERATIONS:

None

STAFF RECOMMENDATION / SUGGESTED MOTION:

I move to approve the 2024 Parks, Recreation & Forestry Volunteers.

ATTACHMENT(S):

Volunteers

2024 Park, Recreation & Forestry Volunteers

<u>Parks</u>

Rick Pearson
Dee Dee Whitman
Oliver Whitman

Bramble Park Zoo

Lily Pekelder

Brooklyn Randall

Chase Paszek

Marah Spurgin

Alaina Larson

Brooklyn Comes

Gabriel Mattson

Evelyn Hopper

Emma Haugen

Katelyn Fay

Leighton Dolney

Tia Allen

Owen Mack

Harper Giessinger

Dominic Olson

Brooklyn Maag

Layla Tacy

Lillian Ficek

Kinleigh Boydston

Margaret Williams

Adrian Gilman

Amelia Ries

Brynlee Swiden

Grace Brown

Tai Lê

Allison Reeves

Hunter Spaniol

Katri Kinnunen

Konnar Kranz

Anastacia Isakov

Hunter Wietzema

Marley Phillips

Jayna Davis

Agenda Item 7.(c) Authorization for Watertown Fire Rescue to declare Med...



City Council Agenda Item

Subject: Authorization for Watertown Fire Rescue to declare Medic 4 Ambulance as surplus

and then trade-in at Premiere Specialty Vehicles.

Meeting: City Council - Jun 03 2024

From: Amanda Mack, City Manager

BACKGROUND INFORMATION:

Every ten years we trade in the oldest ambulance and this is a 2013 Ford F550.

FINANCIAL CONSIDERATIONS:

Premiere Specialty Vehicles will apply \$47,000 trade in allowance to the new ambulance.

STAFF RECOMMENDATION / SUGGESTED MOTION:

I move to approve the authorization for Watertown Fire Rescue to declare Medic 4 ambulance as surplus and then trade-in at Premiere Specialty Vehicles.

ATTACHMENT(S):

Medic 4 Trade info

Agenda Item 7.(c) Authorization for Watertown Fire Rescue to declare Med...

WFR Trade in Ambulance to Premiere Specialty Vehicles

WFR name of vehicle	Description model	Year	Serial number	
Medic 4 Ambulance	Ford F-550	2013	1FDUF5HT7DEA81353	

Agenda Item 7.(d) Authorization for the Police Department to make advanc...



City Council Agenda Item

Subject: Authorization for the Police Department to make advanced payment to Innovative

Timing Systems in the amount of \$25,293.00 for the DASH Timing System.

Meeting: City Council - Jun 03 2024

From: Amanda Mack, City Manager

BACKGROUND INFORMATION:

Innovative Timing System (ITS) requires advanced payment for the DASH Timing System that was previously approved. ITS is a well established and well known vendor.

FINANCIAL CONSIDERATIONS:

None

STAFF RECOMMENDATION / SUGGESTED MOTION:

I move to approve the advanced payment to Innovative Timing Systems in the amount \$25,293.00 for the DASH Timing System.

ATTACHMENT(S):

Watertown PD Invoice

INNOVATIVE TIMING SYSTEMS

INVOICE

11671 Lilburn Park Road Saint Louis, MO 63146 (314) 737-4900 FAX (314) 737-4908

www.innovativetimingsystems.com

DATE:

05/21/2024

INVOICE #: REP:

24052105 MM

TERMS:

Net 30 w/ PO

Ship To:

City of Watertown Police Dept Tim Toomey 128 N Maple St Watertown, SD 57201 (605)882-5239 / (605)881-7614 Bill To:

City of Watertown Police Dept

Tim Toomey 128 N Maple St Watertown, SD 57201

(605)882-5239 / (605)881-7614

comey	@watertownpd.com Ttoomey@watertownp	d.com	
QTY	DESCRIPTION	UNIT PRICE	AMOUNT
3	Jaguar G4 - FGA1500/ 8000 Race Timing System includes: Jaguar G4 Timing case with RFID reader Jaguar G4 Software supports up to 10,000 race participants One Jaguar FGA1500 Folding Ground Antenna One Jaguar 8000 antenna with mounting bracket and cable One Antenna Tripod Stand	\$5,649.00	\$16,947.00
1	Jaguar Standard Technical Support Plan (annual) includes: Ten support tickets by phone or email (up to 30 minutes each)	\$0.00	\$0.00
1000	Stock Design Race Bib with pre-programmed Jaguar KF-Chip (disposable, one-use timing chip)	\$1.52	\$1,520.00
200	Jaguar T-Chip with ankle strap waterproof, reusable timing chip with passive RFID chip technology requires no battery, up to 50-year lifespan, we vertically optimized for PT testing		\$3,000.00
1	Jaguar Spot	\$899.00	\$899.00
1	On-Site Training in Watertown,SD - One Jaguar Engineer for one 8 includes travel, lodging, and meal expenses Date must be scheduled at least 21 days in advance. Any date chang time incur additional charges due to costs incurred for flight changes.		\$2,500.00
1	Shipping	\$427.00	\$427.00
		SUB-TOTAL	\$25,293.00
	NOTE: There are no returns on this equipment other than warranty repair	ir. TAX	\$0.00
ake che	eck payable to Innovative Timing Systems, LLC	TOTAL	\$25,293.00

NOTE: Current shipping schedule is approximately 5 to 6 weeks from the time we receive your order.

Signature:

Date: 5/21/24

Agenda Item 7.(e) Authorization for the Police Department to transfer \$2...



City Council Agenda Item

Subject: Authorization for the Police Department to transfer \$20,000 from 2024 CIP to

vehicle equipment line.

Meeting: City Council - Jun 03 2024

From: Amanda Mack, City Manager

BACKGROUND INFORMATION:

See attached justification.

FINANCIAL CONSIDERATIONS:

None

STAFF RECOMMENDATION / SUGGESTED MOTION:

I move to approve the authorization for the Police Department to transfer \$20,000 from 2024 CIP to vehicle equipment line.

ATTACHMENT(S):

CIP transfer funds 2024

The Watertown Police Department respectfully requests the transfer of \$20,000 dollars from the vehicle CIP fund for 2024 into the vehicle equipment line. In 2024, The Watertown Police Department was approved to spend \$157,000 dollars to replace and equip three new patrol vehicles. During this process, the police department traded in four total vehicles to Watertown Ford and received \$18,000 dollars in credit towards the purchase of the new vehicles. The remaining \$2000 dollars being requested for transfer is a result of in house equipment installation cost savings. The \$20,000 dollars will be used to purchase Pro-guard equipment organizers for the back of the Ford Explorers. Our current marked vehicles do not have secured storage in the rear of the vehicle for our equipment.

Agenda Item 7.(f) Authorization to transfer the Event Date of a Special ...



City Council Agenda Item

Subject: Authorization to transfer the Event Date of a Special Event Malt Beverage Retailer's

License & Special Event Retail Wine License for the Watertown Area Chamber of Commerce d/b/a Watertown Area Chamber of Commerce for the Wine & Beer Walk, 1 East Kemp Ave, Lots 18-20 & 21-22 & N18' E24' Block 4 Original Plat from

Thursday, May 30th, 2024 to Thursday, June 6th, 2024.

Meeting: City Council - Jun 03 2024

From: Amanda Mack, City Manager

BACKGROUND INFORMATION:

The Special Event Malt Beverage Retailer's License & Special Event Retail Wine License for the Wine & Beer Walk was previously approved at the May 6th, 2024 City Council Meeting. Due to forecasted weather, the Chamber has made the decision to postpone the event until Thursday, June 6th, 2024 from 5:00 PM to 8:00 PM.

FINANCIAL CONSIDERATIONS:

There are no major financial considerations for this item.

STAFF RECOMMENDATION / SUGGESTED MOTION:


I move to approve the transfer of the Event Date of a Special Event Malt Beverage Retailer's License & Special Event Retail Wine License for the Watertown Area Chamber of Commerce d/b/a Watertown Area Chamber of Commerce for the Wine & Beer Walk, 1 East Kemp Ave, Lots 18-20 & 21-22 & N18' E24' Block 4 Original Plat from Thursday, May 30th, 2024 to Thursday, June 6th, 2024.

ATTACHMENT(S):

Wine & Beer Walk

Agenda Item 7.(f) Authorization to transfer the Event Date of a Special ...





I hope this letter finds you well. I am writing to inform you of a necessary change regarding the upcoming Wine Walk, scheduled to take place on Thursday May 30th, 2024 due to the forecasted weather conditions.

In light of this, we have made the decision to reschedule the Wine Walk to ensure the safety of all involved. The new date for the event will be Thursday June 6th, 2024, at the same time and location previously arranged. We believe that this adjustment will allow us to provide a safer and more enjoyable experience for everyone involved.

We will be taking all necessary steps to ensure that all participants and vendors are informed of the date change. Additionally, we will work diligently to update any promotional materials or advertisements to reflect the new date.

Thank you for understanding and cooperation in this matter. If you have any questions or concerns, please doe not hesitate to contact us at Watertown Area Chamber of Commerce 605-886-5814. We appreciate your continued support.

Sincerely,

TIM SHEEHAN PRESIDENT & CEO



Page 16 of 206



Special Event & Weekly Seasonal Event Alcohol Beverage License Application

	Special Malt Beverage Retailers License
	Specail On-Sale Wine Retailers License
	Special On-Sale License
	Special Off-Sale Package Wine Dealers License
	Special Off-Sale Package Wine Dealers License – Donated Beverages
	Special Off-Sale Package Malt Beverage Dealers License – Donated Beverages
	Special Off-Sale Package Dealers License – Donated Beverages
	me and Description of Special Event <u>Special</u> <u>Event retail</u> wine t last beverage license for our wine t Beer walk lay 30th 2024 from 5:00 pm - 8:00 pm
3.	censes can be issued for a period of time to be established by the Council for a duration of a special event, but not ceed fifteen (15) consecutive days)
4.	censes can be issued for a period of time to be established by the Council for a duration of a special event, but not
4.	censes can be issued for a period of time to be established by the Council for a duration of a special event, but not ceed fifteen (15) consecutive days) scribe Event Location: Lots 18-20 + 21-22 + N18' E 24' Black 4 event Address: I E Vemp Ave Workstown 50 57201 ent Applicant and Applicant Address: Watertown Area Chamber of Commerce of apply for a Special Event License, you must be one of the following (please check one) of Civic, Charitable, Educational or Fraternal: please provide copy of 501(c)(3).
4.	censes can be issued for a period of time to be established by the Council for a duration of a special event, but not ceed fifteen (15) consecutive days) scribe Event Location: Lots 18-20 + 21-22 + N18' E 24' Block 4 event Address: I E Vemp Ave Workchaum 50 51201 ent Applicant and Applicant Address: Waterfaum Area Chamber of Commerce apply for a Special Event License, you must be one of the following (please check one) of Civic, Charitable, Educational or Fraternal: please provide copy of 501(c)(3).
4.	censes can be issued for a period of time to be established by the Council for a duration of a special event, but not ceed fifteen (15) consecutive days) scribe Event Location: Lots 18-20 + 21-22 + N18' E 24' Block 4' Bent Address: I E Vemp Ave Wakerboun 50 57201 ent Applicant and Applicant Address: Valerboun Area Chamber of Commerce of apply for a Special Event License, you must be one of the following (please check one) of Civic, Charitable, Educational or Fraternal: please provide copy of 501(c)(3). Civic Charitable
4.	censes can be issued for a period of time to be established by the Council for a duration of a special event, but not ceed fifteen (15) consecutive days) scribe Event Location: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + N18' E 24' Block 4 cent Address: Lots 28-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + 21-22 + N18' E 24' Block 4 cent Address: Lots 28-20 + N18' E 24' Block 4 cent Address: Lots 28-20 + N18' E 24' Block 4 cent Address: Lots 2
4.	censes can be issued for a period of time to be established by the Council for a duration of a special event, but not ceed fifteen (15) consecutive days) scribe Event Location: Lots 18-20 + 21-22 + N18' E 24' Black 4' event Address: Lots 28-20 + 21-22 + N18' E 24' Black 4' event Address: Lots 28-20 + 21-22 + N18' E 24' Black 4' event Address: Lots 28-20 + 21-22 + N18' E 24' Black 4' event Address: Lots 28-20 + 21-22 + N18' E 24' Black 4' event Address: Lots 28-20 + 21-22 + N18' E 24' Black 4' event Address: Lots 28-20 + 21-22 + N18' E 24' Black 4' event Address: Lots 28-20 + 21-22 + N18' E 24' Black 4' event Address: Lots 28-20 + 21-22 + N18' E 24' Black 4' ev
4.	censes can be issued for a period of time to be established by the Council for a duration of a special event, but not ceed fifteen (15) consecutive days) scribe Event Location: Lots 18-20 + 21-22 + N18' E 24' Black 4' Bent Address: I E Vemp Ave Workshown SO 57201 ent Applicant and Applicant Address: Lots 18-20 + 21-22 + N18' E 24' Black 4' Bent Address: Lots 18-20 + 21-22 + N18' E 24' Black 4' Black 4' Bent Address: Lots 18-20 + 21-22 + N18' E 24' Black 4' Black 4' Bent Address: Lots 18-20 + 21-22 + N18' E 24' Black 4' Black 4' Bent Address: Lots 18-20 + 21-22 + N18' E 24' Black 4'
4.	tenses can be issued for a period of time to be established by the Council for a duration of a special event, but not ceed fifteen (15) consecutive days) scribe Event Location: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Address: Lots 18-20 + 21-22 + N18' E 24' Block 4 dent Boverage Licensee
4.	censes can be issued for a period of time to be established by the Council for a duration of a special event, but not ceed fifteen (15) consecutive days) scribe Event Location: Lots 18-20 + 21-22 + N18' E 24' Black 4' Bent Address: I E Vemp Ave Workshown SO 57201 ent Applicant and Applicant Address: Lots 18-20 + 21-22 + N18' E 24' Black 4' Bent Address: Lots 18-20 + 21-22 + N18' E 24' Black 4' Black 4' Bent Address: Lots 18-20 + 21-22 + N18' E 24' Black 4' Black 4' Bent Address: Lots 18-20 + 21-22 + N18' E 24' Black 4' Black 4' Bent Address: Lots 18-20 + 21-22 + N18' E 24' Black 4'

da It	em 7.(f) Authorization to transfer the Event Date of a Special
	Name of Entity Serving Alcohol (if not applicant): Watchown Downtown busineses.
	Including 19de Botrague + A Sacred space
	others not available at this time.
8.	Method of alcohol consumption:
	Sold and consumed on site
	Sold/Auctioned and consumed off site
	-for example, a winery basket at a silent auction
	Jor example, a winery busined at a shelle duction
9.	Estimated number of Participants
	Estimated number of Minors
	Method in which applicants plan to prevent underage consumption: 10 Check
	wrist bands at the beginning of the event.
	*The section Applicated the Application of the plants are stated to present and are go consumption
	*Thursday Night Live Applicants <u>must</u> use wrist bands as method to prevent underage consumption
10	For outdoor events, please submit a drawing illustration of the event area, including stage/platforms, alcohol serving area(s), food serving facilities, garbage collection receptacles, restroom facilities and other amenities.
11	. Post-event clean-up is required prior to vacating the area.
12	. Insurance Requirements: Per City Ordinance, licensees shall maintain liability insurance in an amount of
	not less than One Million Dollars (\$1,000,000) for bodily injury, death, disability, and property damage
	liability during the time the special alcoholic beverage license is in effect. Licensee shall also maintain
	Liquor Liability insurance with a limit of not less than One Million Dollars (\$1,000,000) for each
	occurrence, and if such insurance contains a general aggregate limit, the general aggregate limit shall
	apply separately or be no less than two times the occurrence limit. The City shall be named as an
	additional insured on a primary, noncontributory basis for any liability arising directly or indirectly from
	the special alcoholic beverage license during the time such license is in effect. The licensee must also
	agree to indemnify and hold the City of Watertown, its officers, agents, and employees, harmless from
	and against any and all actions, suits, damages, liability or other proceedings that may arise as the result
	of the alleged negligence of the applicant and/or that is in any way connected or associated with the
	event(s) for which any special alcoholic beverage license is issued which do not solely arise from errors
	or omissions of the City of Watertown, its officers, agents, or employees. Please submit proof of

Agen

13. <u>Fee:</u> For Special Event Alcoholic Beverage Licenses, a fee of \$300 is required. For Special Weekly Seasonal Alcoholic Beverage Licenses, the fee is \$50/per day of event at one lcoation. If applicable, a \$50 notice of public hearing fee must also be submitted by separate check. Fees are to be made payable to the City of Watertown and must be submitted with your application.

insurance with your application.

14. <u>Legal Notice</u>: For certain applicants, the City of Watertown is required by South Dakota state law to publish a legal notice in the local newspaper at least 7 days prior to City Council action. In order to make publication deadlines, we need your completed application at least 20 days prior to the City Council meeting.

Agenda Item 7.(f) Authorization to transfer the Event Date of a Special \dots

15	Certificate: The undersigned applicant certifies under the penalties of perjury that all statements provided herin are true and correct; that the said applicant complies with all requiements for the Special Event Alcohol License in the City of Watertown, SD. 3189 24 Date 3189 24 Date 3189 24 Date Submit completed application to: City Finance Office, Attn: Records/Licensing Manager, PO Box 910, Watertown SD 57201 Phone# (605) 882-6203 • Fax# (605) 882-6218 • licenses@watertownsd.us See Completed by Records & Licensing Manager: Notice of public hearing was published on April 27, 2024 in the Watertown Public Opinion. Public Hearing and/or Council action was held on May (611), 2024 The Watertown City Council took action to Approve Disapprove license due to The following restrictions were imposed: NA				
	scheduled only after all required documents are submited to the Records & Licensing Manager and				
16	. Miscellaneous Information for City Council Review:				
17	. <u>Certificate:</u> The undersigned applicant certifies under the penalties of perjury that all statements provided herin are true and correct; that the said applicant complies with all requiements for the Special Event Alcohol License in the City of Watertown, SD.				
	Eur 3/29/24				
	Signature Date				
	Submit completed application to: City Finance Office, Attn: Records/Licensing Manager, PO Box 910, Watertown SD 57201 Phone# (605) 882-6203 ● Fax# (605) 882-6218 ● licenses@watertownsd.us				
1.	Opinion. Public Hearing and/or Council action was held on May 6th, 2024 The Watertown City Council took action to Approve				
3.	The following restrictions were imposed: NA				
4.	Receipt Number <u>R00003463</u>				
5.	Special Event License Number 24-04				
6.	Mailed to applicant on				
7.	Signature of City Manager: Date 5/8/24				

7.(f) Authorization to transfer the Event Date of a Special ... CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY) 4/25/2024

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed.

	If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).											
	DUCER				CONTAC NAME:	СТ						
Kin	sman Agency				PHONE (A/C, No, Ext): 605-886-4911 (A/C, No): 605-886-2796							
	Box 1415 tertown SD 57201				E-MAIL ADDRESS: Watertown@fischerrounds.com							
VVO	tertown 3D 37201				ADDRE	NAIC#						
					INCLIDE		18988					
INSU	INSURED WATEARE-06											
	tertown Area Chamber of Commerc	ce			INSURE							
1 E	ast Kemp). Box 1113				INSURE							
	tertown SD 57201				INSURE							
					INSURE							
CO	VERAGES CER	TIFIC	CΔTF	NUMBER: 2010684405	INSURE	Kr.		REVISION NUMBER				
TH IN CI EX	IIS IS TO CERTIFY THAT THE POLICIES DICATED. NOTWITHSTANDING ANY RE ERTIFICATE MAY BE ISSUED OR MAY I (CLUSIONS AND CONDITIONS OF SUCH	OF I	NSUF REMEI AIN, CIES.	RANCE LISTED BELOW HANT, TERM OR CONDITION THE INSURANCE AFFORD LIMITS SHOWN MAY HAVE	OF ANY	Y CONTRACT THE POLICIES REDUCED BY I	THE INSURE OR OTHER I S DESCRIBEI PAID CLAIMS.	D NAMED ABOVE FOR	R THE POI	WHICH THIS		
INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER		POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	L	IMITS			
Α	X COMMERCIAL GENERAL LIABILITY			77404791		4/28/2024	4/28/2025	EACH OCCURRENCE	\$ 1,00	0,000		
	CLAIMS-MADE X OCCUR							DAMAGE TO RENTED PREMISES (Ea occurrence)	\$ 50,0	000		
								MED EXP (Any one person)	\$ 5,00	0		
								PERSONAL & ADV INJURY	\$ 1,00	0,000		
	GEN'L AGGREGATE LIMIT APPLIES PER:							GENERAL AGGREGATE	\$ 1,00	0,000		
	X POLICY PRO- JECT LOC							PRODUCTS - COMP/OP AG	,	0,000		
	OTHER:							COMBINED SINGLE LIMIT	\$			
	AUTOMOBILE LIABILITY							(Ea accident)	\$			
	ANY AUTO OWNED SCHEDULED							BODILY INJURY (Per perso				
	AUTOS ONLY AUTOS NON-OWNED							BODILY INJURY (Per accid				
	AUTOS ONLY AUTOS ONLY							PROPERTY DAMAGE (Per accident)	\$			
	<u> </u>								\$			
Α	X UMBRELLA LIAB X OCCUR			4840479100		4/28/2024	4/28/2025	EACH OCCURRENCE	\$ 1,00	,		
	EXCESS LIAB CLAIMS-MADE							AGGREGATE	\$ 1,00	0,000		
_	DED X RETENTION \$ 10,000			A 40050000		4/00/0004	4/00/0005	y PER OTI	\$ H-			
Α	AND EMPLOYERS' LIABILITY Y / N			A106588860		4/28/2024	4/28/2025	X PER OTI ER				
	ANYPROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED?	N/A						E.L. EACH ACCIDENT	\$ 500,			
	(Mandatory in NH) If yes, describe under							E.L. DISEASE - EA EMPLO				
Α	DÉSCRIPTION OF OPERATIONS below Liquor Liability			77404791		4/28/2024	4/28/2025	E.L. DISEASE - POLICY LIN Aggregate		000,000		
^	Elquoi Elability			77404781		4/20/2024	4/20/2023	Each Claim Cause		0,000		
DESC	CRIPTION OF OPERATIONS / LOCATIONS / VFHICE	ES (#	CORD	 101, Additional Remarks Schedu	le, mav he	e attached if more	e space is require	ed)				
	DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)											
CEI	RTIFICATE HOLDER				CANCELLATION							
	Proof of Insurance ONLY Contact 605-886-4361 to be added as a holder.					SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. AUTHORIZED REPRESENTATIVE						
	Watertown SD 57201				Cold 34th							



tem 7.(f) Authorization to transfer the Event Date of a Spediaceipt Number: 23 2ND ST NE P.O. BOX 910 WATERTOWN, SD 57201-0910

Cashier Name:

JC

R00003463

Terminal Number:

22

Receipt Date: 5/7/2024 2:12:53 PM

Trans Code: 101.1000 - LICENSE-LIQUOR

Name: WINE AND BEER WALK, SPECIAL EVENT LIC

\$350.00

Product: OTHER MISC. REVENUE

Description: OTHER MISC. REVENUE

GL Account: 101-31530-36909 - OTHER MISC. REVENUE

Amount:

\$50.00

Product: ALCOHOLIC BEV. LICENSE

Description: ALCOHOLIC BEV. LICENSE

GL Account: 101-31530-32101 - ALCOHOLIC BEV. LICENSE

Amount:

\$300.00

WINE AND BEER WALK, SPECIAL EVENT LICENSE

101-31530-36909 -50.00

101-31530-32101 -300.00 **Total Applied Amount:**

\$350.00

Payment Method: 2-Check

Payor: WINE AND BEER WALK, SPI Reference: 021265

Amount:

\$300.00

Payment Method: 2-Check

Payor: WINE AND BEER WALK, SPI Reference: 021267

Amount:

\$50.00

Total Payment Received:

\$350.00

Change:

\$0.00



City Council

Agenda Item

Subject: Approval of Professional Services Agreement Amendment No. 1 with TEGRA Group

Inc., for Owner's Representative Services related to the Wastewater Treatment

Facility Improvements, Project No. 2317, in the amount of \$607,126.00.

Meeting: City Council - Jun 03 2024

From: Amanda Mack, City Manager

BACKGROUND INFORMATION:

Amendment No 1 will be the Owner's Representative/Construction Administration services for the Wastewater Treatment Facility Improvements, Project No. 2317. These services include examination and processing of project management related submittals, CMAR pay applications, work change directives, change orders, schedules, and other items related to the construction administration of the project.

This agreement with TEGRA is included in the total project expense of \$60,714,000.00

FINANCIAL CONSIDERATIONS:

Initial funding for the overall WWTF and Collection System project was budgeted in the CIP Wastewater Treatment Facility fund account 604-43256-43987 in the amount of \$36,000,000.00. To cover that expense, the City was awarded \$35.7M in current funding. \$15,894,200 in grants (\$3.7M in ARPA, additional \$3.7 matching ARPA, and \$8.5M additional grants), \$19,819,800 in SRF loans at 2.125% for 30 years. Later, during project development, an additional \$25,000,000 in SRF loans at 3.25% for 30 years. This will bring the total project budget to approximately \$61,000,000.

Professional Services Agreements specific to Tegra to perform Owner's Representative duties:

Original Contract: \$207,308.00 <u>Amendment 1: \$607,126.00</u> **Total contract: \$814,434.00**

OVERSIGHT / PROJECT RESPONSIBILITY:

Heath VonEye, Asst. City Mgr./Public Works Director Robert Dari, Wastewater Superintendent Justin Petersen, City Engineer Marci Lewno, Engineer I/Project Manager

STAFF RECOMMENDATION / SUGGESTED MOTION:

Agenda Item 9.(a) Approval of Professional Services Agreement Amendment ... Staff recommends approval of this amendment to professional services agreement through the following motion:

I move to approve Professional Services Agreement Amendment No. 1 with TEGRA Group Inc., for Owner's Representative Services related to the Wastewater Treatment Facility Improvements, Project No. 2317, in the amount of \$607,126.00.

ATTACHMENT(S):

2317 WWWTF- TEGRA Agreement Amendment #1 with Tegra Signature

CONSULTING AGREEMENT

CITY OF WATERTOWN

WASTEWATER TREATMENT FACILITY AND COLLECTIONS PROJECT

Consulting Agreement between City of Watertown, SD and The TEGRA Group, Inc.

dated October 18, 2023

AMENDMENT #1 dated June 3, 2024

TEGRA to perform the tasks generally defined in Exhibit B of the Consulting Agreement between City of Watertown, SD and The TEGRA Group, Inc. dated October 18, 2023. Exhibit B also attached hereto for reference.

CITY shall pay TEGRA for the Services outlined on Exhibit B on a fixed fee basis of \$607,126 payable at \$15,977 per month, beginning July 1, 2024, through August 31, 2027.

CITY of WATERTOWN	TEGRA GROUP
Ву:	By Cunt
Printed Name:	Printed Name: Richard Strassburg
Title:	Title: Partner and President
ATTEST:	
City Clerk	S

Exhibit B

City of Watertown - Wastewater Treatment Facility

Detailed Scope of Services

STEP TWO - POST GMP

- A. General Project Administration Prepare and participate in project meetings, City Council and community meetings as requested by City Manager; oversee project communication between ENG and CMaR teams, vendors, and service providers; prepare and respond to emails and phone calls.
- B. Cost Control Provide risk management tools to evaluate potential financial and schedule risks; track approved and pending change orders, analysis of budget/contingency; assist the ENG team in their review, evaluation and negotiation of CMaR change order requests; review change order requests with the City; assist in classifying and maintaining a log of all change orders in the following categories: (a) unforeseen conditions (b) errors and omissions (c) code and regulatory or (d) City changes; review ENG Additional Services requests, assist in negotiations as needed; periodically update the Master Budget to reflect approved revisions.
- C. Contract Compliance Monitor ENG, consultants, CMaR and vendors for contract compliance; interface as needed with project legal advisors regarding contract amendments; consult with legal advisors on various issues as needed throughout the process.
- **D. Day-to-Day Issue Resolution** Provide experienced based recommendations and assist with resolving day-to-day issues that often arise during the construction of complex components of the Project.
- E. Project Accounting Provide comprehensive financial accounting for the Project; beginning at the time of the CMaR Notice to Proceed and continuing until project completion, provide a monthly Draw Request Report that includes a monthly draw request master spreadsheet, comprehensive invoice summary and copies of all project invoices approved for payment that month; Monthly Draw Request spreadsheet to include the following for each vendor (a) original approved budget, (b) previous month budget, (c) budget revisions for the month, (d) current budget, (e) payment this application, (f) retainage, (g) total paid to date, (h) amount under contract, (h) funds available to finish and (j) percentage complete; invoice summary to include a complete listing of all current and past invoices; reconcile TEGRA cost accounting with City Accounts Payable staff.
- **F. Schedule Compliance** Monitor vendors, service providers and contractors for schedule compliance and report deviations to City; facilitate development of schedule recovery plans if needed.
- G. Requests for Payment Review each submitted invoice or contractor pay request against amount under contract and paid to date on Monthly Draw Request; review service provider and vendor invoices and CMaR monthly pay requests with requirements in corresponding contract agreements; walk the job site with the ENG and assist ENG in determining if CMaR's proposed percentage complete for each trade category on the schedule of values is accurate; obtain ENG certification of pay requests; make invoice and pay application approval recommendations to the City.
- H. Project Reporting Review CMaR's monthly status report which shall include subcontractor buyout report, bid lose/bid savings report, contingency report, pending change order report, comparison of the general schedule to the work actually completed through the date of the report, and list of outstanding issues requiring City action or approval; assist City Manager and City's Project Manager with project reporting as required.

- I. Quality Assurance and Job Site Safety Assist project team in structuring a program for quality assurance, contract compliance, mock-ups, and field testing; recommend peer review of plans and specifications if appropriate; review notices of defective work, monitor CMaR's defective work log, review remedies and coordinate approval from ENG for all corrective work; review the CMaR proposed site specific safety plan, monitor CMaR safety reports of recordable accidents; report quality discrepancies, security and safety concerns to City.
- J. Risk Management Identify and assess risks throughout the process and work with City Manager and City's Project Manager, ENG and CMaR to develop a risk mitigation plan as needed.
- K. Construction Administration Participate in periodic job site walk thru visits to observe progress, staffing, quality, and contract compliance; assist with identifying problems/challenges and provide experienced based recommendations to City on solutions to day-to-day issues; represent the City in job site meetings and job site walk thru meetings; monitor Construction Change Directives, Construction Bulletins, RFI submittal log, shop drawing submittal log, CMaR submittal log, samples and mock ups; monitor and track proposed change orders; keep City informed of problems and issues observed on site.
- L. Low Voltage Provide comprehensive oversite and management of the IT, audio and video design, procurement, and installation of all technology and security systems.
- M. Project Close Out Facilitate the punch list process with the ENG and CMaR; monitor the CMaR's progress in obtaining final sign-off from City inspectors; monitor the commissioning process; assist the Architect with determination of dates for substantial and final completion; coordinate the transmittal of warranties, O&M documents, as-built documents, final lien waivers, attic stock, and CMaR field redlines of plans and specifications.

Agenda Item 9.(b) Approval of Amendment No. 3 with Rice Lake, Constructi...





Agenda Item

Subject: Approval of Amendment No. 3 with Rice Lake, Construction Manager At-Risk for the

Wastewater Collection System and Treatment Facilities Improvements, Project No. 2317, in the amount of \$27,833,041.00 and authorization for Rice Lake to proceed

with construction services for a Guaranteed Maximum Price (GMP) of

\$48,633,277.00.

Meeting: City Council - Jun 03 2024

From: Amanda Mack, City Manager

BACKGROUND INFORMATION:

After value engineering between City staff, Tegra, HDR, and Rice Lake, Rice Lake is proposing a guaranteed maximum price (GMP) of \$48,633,277.00.

The total project budget is \$60,714,000.00 with testing, design, resident engineering, construction administration, owner representative contracts, contingency, allowances, and all other additional costs.

FINANCIAL CONSIDERATIONS:

Initial funding for this project was budgeted in the CIP Wastewater Treatment Facility fund account 604-43256-43987 in the amount of \$36,000,000.00. To cover that expense, the City was awarded \$35.7M in current funding. \$15,894,200 in grants (\$3.7M in ARPA, additional \$3.7 matching ARPA, and \$8.5M additional grants), \$19,819,800 in SRF loans at 2.125% for 30 years. Later, during project development an additional \$25,000,000 in SRF loans at 3.25% for 30 years. This will bring the total project budget to approximately \$61,000,000.

Amendment 1: \$837,353.00 (Screw Press)

Amendment 2: \$19,962,883.00 (HVAC, Plumbing, Electrical, Process Equipment)

Amendment 3: \$27,833,041.00 (Remaining Bid Items)

Total contract/GMP: \$48,633,277.00

OVERSIGHT / PROJECT RESPONSIBILITY:

Heath VonEye, Assistant City Manager/Public Works Director Robert Dari, Wastewater Superintendent Justin Petersen, City Engineer Marci Lewno, Engineer I/Project Manager Agenda Item 9.(b) Approval of Amendment No. 3 with Rice Lake, Constructi...
Staff recommends the approval of the amendment to the agreement through the following motion:

I moveto approve Amendment No. 3 with Rice Lake, Construction Manager At-Risk for the Wastewater Collection System and Treatment Facilities Improvements, Project No. 2317, in the Amount of \$27,833,041.00 and Authorization for Rice Lake to proceed with construction services for a Guaranteed Maximum Price of \$48,633,277.00.

ATTACHMENT(S):

2317 Rice Lake Amendment 3 Watertown SD CMAR GMP WWTF Budget

Amendment Summary:

AMENDMENT 3 to

Standard Form of Agreement Between OWNER AND CONSTRUCTION MANAGER

2013 EDITION

(Construction Manager At-Risk)

WHEREAS the City of Watertown, South Dakota ("Owner") and Rice Lake Construction Group ("CM") (collectively "Parties") on March 7, 2023, entered into a contract for services in connection with the Project known as Watertown Collection System and WWTF Improvements Project (the "Contract");

WHEREAS the Parties wish to amend the Contract in accordance with the terms set forth herein;

NOW, THEREFORE, Owner and CM, intending to be legally bound, in consideration of the mutual promises set forth herein and other good and valuable consideration, the Parties hereby agree to amend the Contract to as outlined in Exhibit A:

Original Contract Price: \$ 0
Current Contract Price: \$ 20,800,236

Net Change Contract Price This Amendment: \$ 27,833,041

Revised Contrac	ct Value: \$ 48,633,277
Current Contra Contract Calendar Days Added This Amer Revised Contract D	
OWNER: City of Watertown	CM: Rice Lake Construction Group
Signed:	Signed: Jaime Com
Title:	Title: Project Manager
Dated:	Dated: 5/24/2024 Attest:
Initial Acknowledgement:	- Control of the cont

Agenda Item 9.(b) Approval of Amendment No. 3 with Rice Lake, Constructi...

EXHIBIT A – SCOPE OF WORK AND PRICE

Agenda Item 9.(b) Approval of Amendment No. 3 with Rice Lake, Constructi...



22360 County Road 12 PO Box 517 Deerwood, MN 56444 218-546-5519 ricelake.org

DEERWOOD | MONTICELLO

May 23rd, 2024

City of Watertown, SD 23 2nd Street NE Watertown, SD 57201

Submitted via email

RE: Watertown WWTF GMP

City of Watertown,

Rice Lake Construction Group (Rice Lake) is pleased to submit our Guaranteed Maximum Price (GMP) to furnish the cost for the below bid packages as detailed in Rice Lake's updated bid packages and VE Spread Sheet along with Rice Lake's GMP Clarifications.

- <u>2.1 Demolition Entire Structures</u>
- 2.2 Demolition and Patching Misc Structural
- 3.01 Cast-In-Place Concrete Furnish & Install
- 3.02 Pre-Cast Hollow Core Plank Furnish & Install
- 4 Masonry Furnish & Install
- 5.1 Fabricated Metals Supply
- 5.2 Fabricated Metals Install
- 7.2 Div 7 EIFS Furnish & Install
- 7.3 Div 7 EPDM Roofing Furnish & Install
- 7.4 Div 7 Joint Sealants Furnish & Install
- 8.1 Div 8 Doors and Frames Supply
- 8.2 Div 8 Access Doors Supply
- 8.3 Div 8 Louvers and Vents Supply
- 8.4 Div 8 Overhead Doors Furnish & Install
- 9 Coatings Furnish & Install
- 10.1 Specialties Supply
- 10.2 General Construction
- 13 Wood Frame Building Systems Furnish & Install
- 31.01 Earthwork and Site Utilities
- 31.02 Dewatering
- 31.03 Temporary By-Pass Pumping
- 32 Chain Link Fences and Gates
- 40.1 Process Pipe Furnish & Install
- 46.9 Process Equipment & Gates Install

Breakout costs are provided in the attached document:

Please let us know if you have any questions. Respectfully submitted,

Jaime Barry Project Manager

5/22/2024



Watertown Approved Bid Packages and VE Items

Items shown in Blue were awarded in amendment no. 1 & amendment no. 2.

Month Mont		OMPANY	_				
April Apri	Waterto	wn, SD - WWTF Improvements				T	1
Second Continue of 15 Seco	GMP			VE OPTIONS	VE ROM VALUE		BP COST W/ YES
December				4/14/2024			
December	CATECORY	DESCRIPTION					
Bords 1538							
Beautiful Colors Section Secti			·				
2.3 Demotion - Print Substance 10 10 5 73,1252							
2.2 Semiconsensit Parameter, 10th Section 10th Sectio	2.1		Bolander/RLCG Budget				
Millar Durchardon	2.2	Demolition and Patching - Misc Structural					
Rober treat	3.1						\$ -
Roop Not Prochange							
Purchase SARd owned CEAT Stormlang							\$ 1,369,839
Compact Printing Control		Purchase SRA to meet 0.032% Shrinkage	GCC Budget				\$ 228,443
Retriet Filter from Concerned 5 183221 No 1 184221 N		Concrete Install	RLCG Budget				
No Sendating before from \$ 1, 13,150 \$ 1, 13,151 \$					\$ 228,443		\$ (228,443)
No. Sendbering refer to cont. \$ 1, 43,727 Yes \$ 1,63,720							\$ (41.354)
Recovery EC of Access feels \$ 155,000 Yes				No Sandblasting before Grout			\$ (43,172)
3.2 Precent below core Pitch				Remove FCJ at Aeration Basin			\$ (105,000)
A Majorny NaCC Budget Subget Su	2.2	Pro cast Hallow Care Plank	Paced on Similar Project SE Prining	Concrete Winter Conditions	\$ (79,000)	Yes	
Solid Supply							
1. Mode - Supply		THOSE IT Y	need budget	Sludge Pump Building Option	\$ 45,000	No	2 243,132
Remove Autorition Capacital Sample Section Capacital Sample Capacital S							
Second Contraction Buffles, Center Wolfs, Work, and Scum Buffles; Sopply Buffce Second Prince Second P	5.2	Metals - Install	RLCG Budget		4 440.000		\$ 414,830
Barbo Properties of the Markey and Sum Saffles - Supply Supp							
3.2 Do Y 18/5 - Furnish B install	6.1	FRP Flocculation Baffles, Center Wells, Weirs, and Scum Baffles - Supply	Bafco	OSE HOLDIP GRIVATILEG	3 30,000	140	\$ 562,675
27.1 Do 7 PERNM Monther Linearia Suary and Record Suary and Re							
8.1. Div 8 Doors and Frames - Supply							
8.2 0 v8 Access Doors - Supply Based on Smillar Project Pricing \$ 2.018 8.8 Div 8 Doverhand Worst - Supply Based on Smillar Project Pricing \$ 5.700 8.4 Div 8 Doverhand Worst - Supply and Mittal American Door Works Budget \$ 6.500 9.1 Overhand Cooper - Supply and Mittal American Door Works Budget \$ 6.500 9.1 Overhand Cooper - Supply and Mittal American Door Works Budget \$ 6.500 9.1 Overhand Cooper - Supply & Install Allowance \$ 6.500 9.1 Overhand Cooper - Supply & Install Allowance \$ 6.500 9.1 Wood Frame Budget Supply & Install Allowance \$ 6.500 9.1 Wood Frame Budget Supply & Install Allowance \$ 6.500 9.1 Wood Frame Budget Supply & Install Allowance \$ 6.500 9.1 Wood Frame Budget Supply & Install Allowance \$ 6.500 9.1 Wood Frame Budget Supply & Install Allowance \$ 6.500 9.1 Wood Frame Budget Supply & Install Allowance \$ 6.500 9.1 Wood Frame Budget Supply & Install Allowance \$ 6.500 9.1 Wood Frame Budget Supply & Install Allowance \$ 6.500 9.1 Wood Frame Budget Supply & Install Allowance \$ 6.500 9.1 Wood Frame Budget Supply & Install Allowance \$ 6.500 9.1 Wood Frame Budget Supply & Install Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Supply & Install \$ 6.500 9.1 Wood Frame Budget Suppl							
8.3 Die Stouwer and West-Supphy of Metable Section							
8.	8.2	Div 8 Access Doors - Supply Div 8 Louvers and Vents - Supply	Based on Similar Project Pricing				\$ 2,618
October Contings - Ferror Rel Incelail	8.4	Div 8 Overhead Doors - Supply and Install					
10.1 Div 10 Specialities-Supply & Rostall Allowance	9	Coatings - Furnish & Install	Mongan Painting Budget				\$ 1,800,000
10.2 General Construction	- 10.1			Revised Paint Budget to New Specification	\$ 450,000	Yes	
13 Wood Frame Building Systems							
22 Plumbing Andor Chappell S 5,83,25		Wood Frame Building Systems	Witt/American Door Works Budget				
Section Muth Electric Section	22						\$ 655,325
Sand Beef Duck Banks Instead of Concrete \$ 6,000 Ves \$ (60,000)	23	HVAC	Chappell				\$ 1,280,000
Size	26	Electrical	Muth Electric				\$ 9,055,933
Silicon							\$ (60,000)
Sample				15 Dewatering - Reuse MCCs			
3.11 Earthwork and Site Utilities Size Homoliton, Clearing and Erosion Control RLCG Budget Structural Exavation and Backfill - Install RLCG Budget Structural Exavation and Backfill - Install Structural Exavation and Backfill - Inchase Materials Dulninck Budget Structural Exavation and Backfill - Inchase Materials RLCG Budget Structural Exavation and Backfill - Inchase Materials RLCG Budget Structural Exavation and Backfill - Inchase Materials Structural Exavation and Backfill - Inchase Materials RLCG Budget Structural Exavation and Backfill - Inchase Materials RLCG Budget Structural Exavation and Backfill - Inchase Materials RLCG Budget Structural Exavation and Backfill - Inchase Materials RLCG Budget Structural Exavation And Backfill - Inchase Materials Structural Exavation And Backfill - Inchase Materials Structural Exavation And Backfill - Inchase Materials Ruckfill - Inchase Materials Ruckfil							
Structural Excavation and Backfill - Install BLGG Budget S 53,310	31.1	Earthwork and Site Utilities		70 Studge Fullip Rease Mees	30,000		\$ -
Structural Excavation and Backfill - Purchase Material RLCG/Bodit Budget S 43,069		Site Demolition, Clearing and Erosion Control					
Haul Off Excess Material RLCG/BothE Budget S 31.10.11							
Temporary Earthwork Retention Systems Bolander/RLCG Budget S 1,196,200					-		
Site Pipe Install					1		
Purchase Site Pipe Materials, Rock, Sand and Flowable Fill S. 3,560,953		Site Pipe Install	RLCG Budget				\$ 1,768,742
Directional Drilling							
Seeding Seed			Based on Similar Project Pricing		-		
Teardown Existing Storage Building					1		
RAS/WAS Relocate & Raise Clarifler Lines \$ 120,000 No		<u>.</u>		Teardown Existing Storage Building	\$ 130,000	No	
Waste Excess Soil Onsite S 135,000 Yes S (135,000 Ves S (135,000 Ves S (135,000 Ves S (135,000 Ves S (145,000 S (145,000 Ves S (145,000 Ves S (15,000 Ves							\$ (65,000)
Use Onsite Soil Below Bituminous							¢ (43F.000)
Change UV Bypass Structure to Precast S 15,000 Yes S (15,000 No S S S S S S S S S	-						
Relocate PC Junction Box							
Not Demo TFs, TF SB and Int SPB \$ 566,000 Yes \$ (566,000)				Relocate PC Junction Box	\$ 65,000	No	
31.2 Dewatering				Abandon Site Pipe instead of Removal			A (800.0
31.3 Temporary By-Pass Pumping	31 2	Dewatering	Griffen Burdget	NOT DEMO 115, 11 SB and INT SPB	> 566,000	Yes	
32 Chain Link Fence and Gates Dakota Fence Budget \$ 136,490 40.1 Process Pipe - Furnish and Install \$ \$ \$ \$ \$ Process Pipe - Install RLCG Budget \$ \$ \$ \$ \$ Process Pipe - Purchase Materials Core & Main/PSI Budget \$ \$ \$ \$ \$ \$ Process Pipe - Purchase Materials Core & Main/PSI Budget \$ \$ \$ \$ \$ \$ \$ Process Pipe - Pipe Insulation Bently Welding Budget Use AWWA Two Hour Pipe Test \$ \$ \$ \$ \$ \$ \$ \$ \$		Temporary By-Pass Pumping					
40.1 Process Pipe - Furnish and Install S	32	Chain Link Fence and Gates					
Process Pipe - Purchase Materials Core & Main/PSI Budget \$ 1,855,439 Process Pipe - Pipe Insulation Bently Welding Budget \$ 84,038 Use AWWA Two Hour Pipe Test \$ 54,000 Yes \$ (54,000)	40.1						\$ -
Process Pipe - Pipe Insulation Bently Welding Budget \$ 84,038 Use AWWA Two Hour Pipe Test \$ 54,000 Yes \$ (54,000)		Process Pipe - Install Process Pipe - Purchase Materials	RLCG Budget				
Use AWWA Two Hour Pipe Test \$ 54,000 Yes \$ (54,000)				<u> </u>	1		
Reuse Existing Wallpipes - 25D101 \$ 14,000 No		p. p	,	Use AWWA Two Hour Pipe Test	\$ 54,000	Yes	
				Reuse Existing Wallpipes - 25D101	\$ 14,000	No	



Watertown Approved Bid Packages and VE Items

5/22/2024

Items shown in Blue were awarded in amendment no. 1 & amendment no. 2.

Watertov	vn, SD - WWTF Improvements							
GMP			VE OPTIONS	VE ROM VALUE		VE ROM VALUE YES, NO, MAYBE		OST W/ YES
			4/14/2024					
CATEGORY	DESCRIPTION							
			Change Aeration Header Supports	\$	18,000	No		
40.2	Process Gates - Supply (Install w. 46.6)	VBM/ Hydro Gate					\$	211,047
41.1	Belt Conveyors - Supply	Vessco/Custom Conveyor					\$	252,132
			Modify Existing Conveyor	\$	230,000	Yes	\$	(230,000
41.2	Hoists, Trolleys, and Monorails - Supply and Install	Aero/Plus Excluded Items					\$	25,577
	Vessco Equipment Package						\$	
43.1	Rotary Screw Blowers - Supply	Vessco/Aerzen					\$	1,032,264
43.2	Non-Clog Centrifugal Pumps - Supply	Dakota Pump/Fairbanks					\$	179,585
43.4	Lobe Pumps - Supply	QFS/Boerger					\$	155,122
43.5	Open Screw Pumps - Supply	GNE/Lakeside					\$	493,299
46.1	Aluminum Covers - Dome Type - Supply	GNE/Apex					\$	157,176
46.2	Chopper Circulation Pump - Supply	Vessco/Trillium					\$	48,140
46.3	Liquid Polymer Feed Equipment - Gravity Belt Thickener - Supply	GNE/Velodyne					\$	95,315
46.4	Spiral Scraper Circular Secondary Clarifier Equipment - Supply	TRI/Envirodyne					\$	1,200,553
46.5	Flexible Membrane Disc Diffusers - Supply	Vessco/SSI					Ś	147,831
46.6	Digester Gas Equipment - Supply	Vessco/Shand & Jurs					Ś	198,594
46.7	Digester - Boiler and Heat Exchanger - Supply	Vessco/Envirex		1			Ś	598,968
46.8	Pumping Equipment - Submersible End Suction Sewage Pumps - Supply	DPC/Fairbanks					Ś	536,310
46.9	Process Equipment & Gates - Install	Di Granzanio		1			Ś	-
	Process Equipment - Demolition	RLCG Budget					\$	1,266,233
	Process Equipment - Install	RLCG Budget					\$	1,565,687
			City to drain and clean Aeration Basin	\$	80,000	No		
			Change Required Operational FC to 2	\$	50,000	No	l	
50	97 Lift Stations - Complete Traffic Control	Dakota Traffic Services		+			\$	59,000
	Asphalt Removal and Replacement	Based on Similar Project Pricing					\$	40,818
	Purchase Precast Lids and CIP Lid for LS 13	Rinker Budget					Ś	46,344
	Purchase Hatches	DPC Budget					\$	63,720
	Demo and Replace LS Lids, Pumps and Piping - Install	RLCG Budget					\$	311,537
	Coatings	Mongan Painting Budget					\$	50,000
	Temporary Bypass Pumping Allowance	Allowance		-			\$	100,000
	Electrical	Egan Budget	Remove Lift Stations from Project		1,537,729	Yes	\$	330,000
			Digester Building - Remove Scope	5	2,000,000	No	,	(1,337,723
			Digester Building - Use OH Door for Opening	\$	100,000	No	1	
			Digester Building - No New Side Door	\$	50,000	No		
			Move Structures to West of Plant Road	\$	1,600,000	Yes	\$	(1,600,000
			Allowance for West Road Modifications - removed per request from City	\$	(285,000)	No	-	
			Revisit Trickling Filter Demo Sequence Reuse Int Screw Pumps and Splitter Box	\$	150,000 1,800,000	No No	-	
			Revisit Blue Tank Options	\$	1,500,000	No No	 	
			Additional Hydro-Excavation (moving west)	Ś	(18,210)	Yes	Ś	18,210
	SUBTOTAL		The second of thosing west	Ÿ	(10,110)	,	\$	42,278,065
	CONTINGENCY						\$	1,000,000
	STATE EXCISE TAX - 2%						\$	954,901
	CMAR FEE - 7.940%	-					\$	3,512,097
	TOTAL						\$	47,745,063
Equipment Prep	workermant	•	Equipment Preprocurement					
							Ś	837,353
	Amendment 1 - Screw Press Preprocurement Screw Press Spare Parts and controls per addenda 1	†	Amendment 1 - Screw Press Preprocurement Screw Press Spare Parts and controls per addenda 1	İś	131,619	No	P	037,333
	TOTAL	i	Revised Screw Press Spare Parts List	\$	66,492	No	t	
		-	Revised Screw Press Controls	\$	50,861	Yes	\$	50,861
						TOTAL	Ś	48,633,277

Agenda Item 9.(b) Approval of Amendment No. 3 with Rice Lake, Constructi...



22360 County Road 12 PO Box 517 Deerwood, MN 56444 218-546-5519 ricelake.org

DEERWOOD | MONTICELLO

Watertown, SD - WWTF Improvements GMP Clarifications

General Clarifications

- The GMP is based on the plans and specifications dated February 9, 2024, Addenda A, B, C, D, E, along with the clarifications and approved VE log incorporated in this amendment. It is understood that the change in scope outlined in the clarifications and VE log is the most current description of the work upon which the GMP is based. At such time that HDR issues a subsequent addendum(s) incorporating and/or further defining the final scope of work Rice Lake will review and confirm that the new information is in alignment with the assumptions that the GMP is based on. The review period will be determined based on the complexity and quantity of changes incorporated in said documents. If work is identified that is not reasonably inferable from the clarifications and/or VE log Rice Lake will notify the City and HDR and also provide an estimated cost and duration to incorporate the additional work. The time to estimate the cost and duration will be determined based on the complexity and quantity of changes incorporated in said documents.
- No cost or schedule impacts that are not reasonably inferable from the documents listed above and called out in the additional clarifications below have been included.
- A ROM cost for the work associated with the added pump in the digester building has been requested by the City. This will be provided at a later date once RL has adequate time to provide a ROM.
- Preliminary/verbal results from HDR confirming geotechnical report that soil properties further to the West have similar strength as the previously issued report.
- The approved amendment no. 1 was executed on 11/30/2023.
- The approved bid packages issued in amendment no. 2 was executed on 5/8/2024.
- This includes the supporting bid documentation in its entirety including but not limited by the bid package forms and the vendors' proposals reviewed by Rice Lake, The City of Watertown and HDR.
- The Asbestos Survey conducted by Geotek is dated April 17, 2024.
- The Lead Survey conducted by Geotek is dated April 11, 2024.
- No cost is included in the GMP for documentation/items not listed and/or detailed within reason in the items above.
- Any hazardous materials not directly stated on the asbestos and lead surveys are not known at the time of the GMP and are subject to a change in cost and construction duration if discovered throughout the construction process.
- The cost model assumes the City is paying all tipping fees at the landfill. Any fees associated with hazardous/unsuitable material are to be handled by the City.
- Structural integrity of existing structures to be determined by engineer.
- No testing of existing pipe included.
- The GMP assumes that the existing facilities are generally constructed per the plans/specifications and as-builts drawings and that significant additional work will not be required. Existing concealed or buried items are assumed to match construction documents.

- The GMP assumes that on future addenda general details remain the same.
- This GMP assumes that at no time will Rice Lake be expected to operate wastewater processes/equipment other than for temporary conveyance for construction sequences only.
- This GMP pricing is contingent upon the below timeline:
 - o Final Plans and Specifications 100% complete: 5/29/2024
 - Assumed Contract Start Date: 6/3/2024
 - o Remaining Bid Packages Advertisement: 6/5/2024
 - o Remaining Bid Packages Bid Date: 7/11/2024
 - City Council's Approval of Remaining Bid Packages: 8/5/2024
 - Substantial Completion: 9/1/2027
 - o Final Completion: 5/15/2028 (1,442 Calendar Day Duration)
- The GMP is contingent upon engineer review period of three weeks per submission for a given submittal or shop drawing. Any reviews lasting longer than three weeks may impact the construction schedule.

2.1 Demolition - Entire Structure

 The GMP assumes that the 4ea trickling filters, trickling filter splitter box, and intermediate screw pump building are to be abandoned in place along with the associated utilities, piping, metal fabrications, electrical, HVAC, plumbing, etc.

2.2 Demolition and Patching - Misc.

3.1 Cast-In-Place Concrete

- Included the following specification changes:
 - Watertightness test water elevation will be per ACI as either the design maximum liquid level or four inches below any fixed overflow level.
 - o No sandblasting will be required before placing grout or rubbing walls.
- The future construction joint at the Aeration Basin is removed.
- The GMP assumes that the structures moved to the west side of the road will have the same wall/slab thickness, reinforcement, elevations as previously detailed. The base slab preparation detail shall remain the same as previously detailed.

3.2 Pre-Cast Hollow Core Plank

4 Masonry

5.1 Fabricated Metals & FRP - Supply

No FRP included in plans other than bid package 6.1.

5.2 Fabricated Metals & FRP - Install

No FRP included in plans other than bid package 6.1.

6.1 FRP Flocculation Baffles, Center Wells, Weirs, and Scum Baffles - Supply

7.2 Div 7 EIFS - Furnish & Install

7.3 Div 7 EPDM Roofing - Furnish & Install

 The GMP includes roofing patching as detailed for structures 15, 45, 80 & 85. No flashing replacement is included for these structures.

7.4 Div 7 Joint Sealants - Furnish & Install

8.1 Div 8 Doors and Frames - Supply

• Included an allowance for the 70 Sludge Building windows in this bid package.

8.2 Div 8 Access Doors – Supply

• For the one hatch on the WWTF site. The hatches for the lift stations are not included.

8.3 Div 8 Louvers and Vents – Supply

8.4 Div 8 Overhead Doors - Supply and Install

Per specifications and plans operators are 208v3ph. No explosion proof operators included.

9 Coatings - Furnish & Install

- Coatings include 3ea screw pumps, 1ea primary clarifier, junction box, all new dip, all new
 construction as specified and existing structure rehab as noted. No concrete restoration is
 included. The coating of existing tanks is not included. Coating of existing facilities, doors and
 frames is not included unless noted on the plans.
- Assumed process pipe labels are to be coated in the field. 09 96 00 3.6 states this is to be done at the factory, which is not possible.

10.1 Div 10 Specialties - Furnish & Install

 The specifications reference plan locations for hazard signs and safety signs. There currently are none called out in the plans. Likewise for fire specialties. The cost in the GMP is an allowance for material and labor.

10.2 General Construction

13 Wood Frame Building Systems

- Concrete for the Storage Building is included in the concrete bid package.
- Electrical for the Storage Building is included in the electrical bid package.

22 Plumbing & Hydronic

• Glycol for new hydronic piping and equipment is included in the GMP. There is not enough information to include glycol for the existing pipe that is not shown in the plans.

23 HVAC

26 Electrical

• The GMP assumes that all the electrical remains the same outside of the structures moving to the West side of the roadway and any applicable VE items.

31.01 Earthwork and Site Utilities (Includes Site Concrete, Asphalt, Topsoil, Seeding...)

- The GMP is based on soil and water conditions in line with the geotechnical report included in the plans and specifications. Any deviations in the soil or groundwater conditions during construction are subject to a change in cost and construction duration.
- The GMP assumes that any contaminated soil will be handled outside of the GMP per the CMAR team discussions and general understanding.
- The GMP assumes that the pipe bedding requirements shall be the same as previously detailed. Utility depth will remain the same as previously detailed. Re-routed utilities will be placed so that they do not undermine existing structure or require temporary earth retention systems to install. OSHA approved excavations are required when determining the need for a temporary earth retention system. The GMP assumes that the proposed utility tie-ins and structure's construction will not increase bypassing durations.
- Preliminary sketch dated email to Rice Lake on 4/2/2024 at 12:08 PM, moving the proposed structures to the west side of the road which also detailed utility diameter, approximate locations of utilities and structures. Please see the additional clarifications below to this preliminary drawing.
- Rice Lake has not included a costs for raising the road to maintain bury depth on the 48" PE, 36"
 ABI, 16" RAS & 24" SI. The GMP assumes that fittings are not being added to maintain a bury depth. Any costs associated with raising grades over pipes or adding fittings will be covered by the owner.
- It is assumed that the proposed grading-topography on site around the structures moved to the west will only be raised around the structures with on-site material. This grade will not be raised past the previously issued grade-topography.
- The GMP assumes that any excess excavated material shall remain on site upon completion of construction.
- The proposed manholes on the 48" primary clarifier effluent line is assumed to be unlined standard pre-cast concrete. Standard manhole steps are assumed, no fabricated metal ladders are included. The manholes are assumed to have a cone lid with a manhole casting, no access hatches or railings are included. Standard manhole pipe boots pipe inverts are assumed.
- The 10' diameter manhole being installed on the new & existing primary clarifier effluent is assumed to have a cookie base with a doghouse to go around the existing primary clarifier effluent line. After the existing effluent pipe is no longer needed it is assumed that a MJ cap can be installed on the outside of the manhole on the existing pipe no modifications to the manhole to abandon this pipe are included.
- The GMP assumes that no additional bituminous or concrete pavement/sidewalk was added outside of the road running from the dewatering building to the proposed final clarifier no 4. The bituminous depth shall remain the same as previously detailed.
- The GMP assumes the non-organic existing soil can be reused as fill on site around structures, tanks and utilities as mentioned in the geotechnical report.
- No temporary asphalt or concrete sidewalks.

- Rice Lake has assumed that 2ea additional 72" Dia manholes with cone lids and a casting would be used instead of fittings on the 48". This means there should only be straight sections of pipe with no 48" fittings from the 10' Dia manhole over to the ab basin splitter structure.
- The GMP assumes that AB Tank no. 3 can process flows directly from the primary clarifiers. Plant flow will not need to be rerouted from the effluent of the trickling filters to operate the new aeration basin tank.

31.02 Dewatering

Included electrical hookups for pumps.

31.03 Temporary By-Pass Pumping

- This bid package is for the bypassing at the WWTF site. The bypassing for the lift stations is not included in the GMP.
- The cost model includes an auto dialer for pump-dewatering 24/7 monitoring. A 24/7 manned monitored bypass is not included in the cost model.

32 Chain Link Fence and Gates

• The GMP does not include a loop system for the gate operator. This is assumed to be a keypad gate operator, or the loops system is existing. Specification does not clarify gate operator.

40.1 Process Pipe - Furnish and Install

- The GMP assumes that the process piping and process equipment outside of the revised aeration basin effluent box shall remain the same as previously detailed.
- Underground Pipe Insulation foam glass insulation with sealant and aluminum jacketing, in lieu of fiberglass.
- Based on the following Pipe Types:
 - ALP as follows: Buried DIP UL / Exposed SCH 10 CS / Tank Drop Legs SCH 10 316SST
 - ARD as follows: Exposed PVC SCH 80
 - o D as follows: Buried DIP CL / Exposed PVC SCH 80, DIP CL
 - DG as follows: Buried Poly / Exposed SCH 10 316SST
 - O DS as follows: Exposed DIP CL
 - o F as follows: Buried C900
 - NG as follows: Buried Poly / Exposed BLK STL
 - OF as follows: Exposed DIP CL
 - PSD as follows: Buried PVC/ Exposed DIP GL
 - o PSM as follows: Exposed DIP GL
 - RAS as follows: Buried DIP, C900 / Exposed DIP
 - RCY as follows: Buried DIP / Exposed DIP
 - o RSD as follows: Exposed DIP CL
 - O SE as follows: Buried DIP, C900
 - o SI as follows: Buried DIP, C900
 - SP as follows: Exposed PVC SCH 80
 - SSM as follows: Exposed DIP GL, PVC SCH 80
 - STW as follows: Buried PVC SDR 26
 - SW as follows: Exposed PVC SCH 80

- o TAS as follows: Exposed DIP CL
- o W1 as follows: Buried C900, HDPE
- W2 as follows: Exposed PVC SCH 80
- WAS as follows: Buried DIP CL / Exposed DIP CL

41.1 Belt Conveyors – Supply

 An allowance is included to modify the existing conveyor's supports and coat the existing conveyor. No new conveyor will be purchased.

41.2 Hoists, Trolleys, and Monorails - Supply and Install

• An allowance is included in the GMP until the scope is revised.

All Process Equipment Bid Packages

 All clarifications and deviations from the specifications called out in supplier's scope have been reviewed and accepted by the engineer.

46.9 Process Equipment & Gates - Install

- The GMP is based on 1/8" of grout for the screw pumps in the 10 Headworks Building. No existing grout demo is included based on the plans. Assumed sandblasting will be the surface prep required before the 1/8" grout is applied to the channels.
- It is assumed that the existing base and bolts will work for the gear box replacement on the screw pumps in the 10 Headworks Building.
- Including cure time each screw pump in the 10 Headworks Building will be offline for a minimum of 6 to 8 weeks per pump. No bypassing for this work is included in the cost model.
- The GMP assumes the existing conveyor in the 15 Dewatering Building will be adjusted by Rice Lake to operate with the proposed dewatering screen.
- The GMP assumes that the City is paying any tipping fees from the landfill for the solids remaining in the 35 existing aeration basin. The cost model assumes that there are 2' of solids in the existing basins for a total qty of 800 CY.
- The GMP assumes that the grout in the 3ea 40-Existing Final Clarifiers is to remain. There is no grout removal and/or replacement included in the cost model for the existing clarifiers.
- The GMP does not include any bypass pumping for gate seal replacement nor the removal of any gates to install seals. There was not sufficient information on the gates seals to provide the cost of bypass pumping or the exact process involved to replace the seals. A general note to coordinate with the owner is all that was provided.
- Polymer for test period is to be provided and paid for by the City.

50 97 Lift Stations – Complete

• Lift Stations have been removed from the project.

Collection System and Watermain

• The collection system and watermain have been removed from the project.

Onsite Rubble Removal

genda Item 9.(b) Approval of Amendment No. 3 with Rice Lake, Constructi
 Costs are not included in the cost model. Unit price will be established when the earthwork package is bid out. Unit price does not include any cost impacts to site piping or earth retention.

Watertown Wast Water Treatment Facility DRAW BOOK XX - DRAFT REPORT_R10

Vatertown Wast Water Treatment Facility DRAW BOOK XX - DRAFT REPORT_R10											
ITEM	Description / Notes	SUBCONTRACTOR	BUDGET (5/22/2024)	PREVIOUS REVISIONS	BUDGET REVISIONS	CURRENT BUDGET	PREVIOUS PAYMENTS	PAYMENT THIS DRAW	TOTAL PAID TO DATE	BUDGET BALANCE TO FINISH	PERCENT COMPLETE
OFT COSTS											
ite Investigation	_										
Subsurface Utility Exploration		Rice Lake	51,933			51,933		51.933	51,933	-	100%
Asbestos Management		The Land	6,590			6,590		6,590	6,590	_	100%
rofessional Fees			0,000			0,000		0,000	0,000		10070
Architect & Engineering Design Fees		HDR	8,569,896			8,569,896		3,737,703	3,737,703	4,832,193	44%
Loans/Bonding		ITIDIX	500			500		167	167	333	33%
Owner Representative		Togra	814,431			814,431		177,690	177,690	636,741	22%
Owner Representative Reimbursables		Tegra						606	606	8,394	7%
		Tegra	9,000			9,000		600	606	8,394	1%
wner Equipment & Furnishings											
Bobcat / Skidsteer (Tote relocation)			1			1		-	- '	1	0%
Misc. Project Expenses			5,000			5,000		-		5,000	0%
oft Cost Subtotal			9,457,351	-	•	9,457,351	•	3,974,689	3,974,689	5,482,662	42%
ONSTRUCTION COSTS											
Pre Construction		Rice Lake	269,650			269,650		242,685	242,685	26,965	90%
Construction		Rice Lake	48,633,277			48,633,277		-	- '	48,633,277	0%
City fees (Permits, etc.)			l ' 1			1		_	- '	l ' 1	0%
Govt Fees (Permits, etc.)			1.000			1,000		_		1.000	0%
Testing			200,000			200,000		_		200,000	0%
WMU Fees			50,000			50,000		_		50,000	0%
Asbestos and/or Lead Paint Removal			30,000			1		-		30,000	0%
	-		49,153,929			49,153,929		242.685	242,685	48,911,244	0%
onstruction Subtotal			49,153,929	-	-	49,153,929	-	242,685	242,085	48,911,244	0%
WNER HELD CONTINGENCIES & ALLOWANCES											
Owner Contingency	2.19%		1,327,919			1,327,919		-	- '	1,327,919	0%
Unsuitable Soils Contingency (5,000 CY Remove & Replace)			425,000			425,000		-	- '	425,000	0%
Unsuitable Soils Tipping Fees (5,000 CY)			297,000			297,000		-	- '	297,000	0%
Aeration Basin Sludge Disposal Contingency / Tipping Fees (800 CY)			52,800			52,800		-	- '	52,800	0%
Design Contingency			1			1		-	-	1	0%
wner Held Cont & All Subtotal	:		2,102,720	-	-	2,102,720	_	-	_	2,102,720	0%
RAND TOTAL	<u>'</u>		60,714,000	_	-	60,714,000	_	4,217,374	4,217,374	56,496,626	43%
						Updated		.,=,	.,,	,,	
			·						•		
unding Sources	Approved	Requested	Total	Notes					4		
ederal Grant dollars passed through State - Grant # 2022G-ARP-210	\$ 12,194,200		\$ 12,194,200								
	\$ 3,700,000	- 1	\$ 3,700,000								
rirect Federal ARPA grants dollars - received in 2022											
tate Revolving Fund Loan #14	\$ 19,819,800	\$ -	\$ 19,819,800								
		\$ -	\$ 19,819,800 \$ 25,000,000								

u	nd	a	te	c

Funding Sources	Appro	ved	Requested	Total	Notes	
Federal Grant dollars passed through State - Grant # 2022G-ARP-210	\$	12,194,200	\$ -	\$ 12,194,200	"	
Direct Federal ARPA grants dollars - received in 2022	\$	3,700,000	\$ -	\$ 3,700,000		
State Revolving Fund Loan #14	\$	19,819,800	\$ -	\$ 19,819,800		
New SRF Loan	\$	25,000,000	\$ -	\$ 25,000,000		
	\$	60,714,000	\$ -	\$ 60,714,000		•

Watertown Wast Water Treatment Facility DRAW BOOK XX - DRAFT REPORT_R10

Commitment Tracker

Commitment Tracker							
ITEM	SUBCONTRACTOR	CURRENT BUDGET	Subcontract Value	Vendor Quote (Not Contracted)	Line item budget value carried	Budgets for Consideration	Description / Notes
SOFT COSTS							
Site Investigation							
Subsurface Utility Exploration		51,933					
Assigned Subcontracts			0				
	Rice Lake		51,933		51,933	51,933	9/22/2023 Quote
Assigned Subcontracts Subtotal		51,933					
(Over)/Under		(0)			51,933		
Asbestos Management		6,590					
Assigned Subcontracts			0				
	GeoTek		6,590				Costs to-date
Assigned Subcontracts Subtotal		6,590					
(Over)/Under		(0)					
Professional Fees		0.500.000					
Architect & Engineering Design Fees		8,569,896	•				
Assigned Subcontracts	HDR		0 774 040		0.774.040	0.774.040	Commence that Book at
	HDR		3,774,343		3,774,343	3,774,343 2,323,168	Compensation Packet BC-2: Basic Services Engineering add for HDR Budget - 8/14/23
	HDR					580,715	Adminstration add for HDR Budget - 8/14/23 Adminstration add for HDR Budget - 8/14/23
	HDR					1,700,000	Engineering CA/RPR Observation add for HDR Budget - 8/14/23
	HDR					1,832,880	WWTF CA/RPR (from Facility Plan) - 1/24/24
	HDR					489,981	Collection System CA/RPR (from Facility Plan) - 1/24/24
	HDR					150,000	Budget for additional collections work - 1/24/24
	HDR						Optional Arc Flash Study - 3/4/24
	HDR					100,000 1,200,000	T&M for CA/RPR based on RI's updated schedule - 3/4/24
	HDR					300,000	T&M to move Aeration Basin No. 3 and Final Clarifier No. 4 - 3/6/24
	HDR						Budget for additional sanitary sewer design services - 3/17/24
	HDR					110,000 515,000	Budget for redesign of proposed VE items - 3/17/27
	HDR					4,300,000	WWTF Construction Phase Services
	HDR		500.421		500.421	500,421	Amendment #1 Design Services (VE Redesign & Collections)
	HDR		938,600		938,600	938,600	Amendment #1 CA & RPR (2024)
	HDR		3,356,533		3,356,533	3,356,533	Amendment #1 CA & RPR (2024) Amendment #1 CA & RPR (2025, 2026, 2027)
Assigned Subcontracts Subtotal	TIDIC	8,569,896	3,330,333		3,330,333	3,330,333	Amendment #1 CA & RFR (2023, 2020, 2021)
(Over)/Under		(0)			8,569,896		
Loans/Bonding		500			0,000,000		
Assigned Subcontracts			0				
· ·g			•				
Assigned Subcontracts Subtotal		0					
(Over)/Under		500					
Owner Representative		814,431					
Assigned Subcontracts			0				
	Tegra		207,305		207,308	207,308	Step One Services (Assumes GMP by June 2024)
	Tegra		607,126		607,126	607,140	Amendment #1 Step Two Services (Assumes \$60,714,000 Total Project Cost)
Assigned Subcontracts Subtotal		814,431					
(Over)/Under		(0)			814,434		
Owner Representative Reimbursables		9,000					
Assigned Subcontracts			0				
			606				Costs to-date
Assigned Subcontracts Subtotal		606					
(Over)/Under		8,394					
Owner Equipment & Furnishings							
Bobcat / Skidsteer (Tote relocation)		1					
Assigned Subcontracts			0				
A : 101 01111							
Assigned Subcontracts Subtotal		0					
(Over)/Under							
Misc. Project Expenses		5,000	0				
Assigned Subcontracts			0				Coate to date
Assigned Subcontracts Subtotal		0	-				Costs to-date
(Over)/Under	1	5,000					
Soft Cost Subtotal		9,457,351					
Assigned Subcontracts			0				
	Multiple		9,443,456				
Assigned Subcontracts Subtotal		9,443,456					
(Over)/Under		13,895					
(CVC) polices	1	10,000		ı			I.



Watertown Wast Water Treatment Facility DRAW BOOK XX - DRAFT REPORT_R10 Commitment Tracker

Commitment Tracker							
ITEM	SUBCONTRACTOR	CURRENT BUDGET	Subcontract Value	Vendor Quote (Not Contracted)	Line item budget value carried	Budgets for Consideration	Description / Notes
CONSTRUCTION COSTS							
Pre Construction		269,650					
Assigned Subcontracts			0				
	Rice Lake		269,650		269,650	269,650	CM Basic Services (Lump Sum)
Assigned Subcontracts Subtotal		269,650					
(Over)/Under		(0)			269,650		
Construction		48,633,277					
Assigned Subcontracts	Rice Lake Rice Lake Rice Lake HDR Rice Lake Rice Lake Rice Lake HDR HDR Rice Lake Rice Lake		0 837,353		837,353	29,624,414 15,229,034 8,699,248 (1,216,935) 52,630,009 837,353 131,619 7,615,000 1,075,000 12,342,585	Rice Lake - 30% Cost Model (\$29.5M Scope) - 5/23/23 Rice Lake - Add for 30% Cost Model (Entire Project) - 5/23/23 Rice Lake - Add for 8/8/2023 Cost Model (Entire Project) - 8/8/23 HDR - Deduct for HDR Budget - 8/14/23 Rice Lake - IFB Cost Model - 3/4/2024 Rice Lake - Amendment #1 - Screw Press Rice Lake - Screw Press Amendment Revision - 1/30/2024 HDR - 60% Collections System _1/31/2024 HDR - 60% Collections System Roadways _1/31/2024 Rice Lake - 30% Collections System _2/1/2024 (HDR Quantities) Rice Lake - 30% Collections System _2/1/2024 (RDQ Quantities)
Assigned Subcontracts Subtotal	Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	48,633,277	19,962,883 27,833,041		19,962,883 27,833,041	10,926,846 7,568,479 1,118,891 19,962,883 28,165,950	Rice Lake - 60% Collections System_2/1/2024 (HDR Quantities) Rice Lake - 50% Sludge Digester Lift Stations 2/5/2024 Rice Lake - 30% Watermain 2/5/2024 Rice Lake - Amendment #2 - MEP & Equipment Bid Package Rice Lake - Amendment #3 - GMP
Assigned Subcontracts Subtotal (Over)/Under		48,633,277			48,633,277		
City fees (Permits, etc.)		1			40,033,211		
Assigned Subcontracts			0				
7 longitud Gabootiilaada							
Assigned Subcontracts Subtotal		0					
(Over)/Under		1					
Govt Fees (Permits, etc.)		1,000					
Assigned Subcontracts			0				
Assigned Subcontracts Subtotal		0					
(Over)/Under		1.000					
Testing		200,000					
Assigned Subcontracts	GeoTek		0 152,000			152,000	GeoTek - Construction Materials Testing Proposal - 5/14/2024
Assigned Subcontracts Subtotal		152,000					
(Over)/Under		48,000					
WMU Fees		50,000					
Assigned Subcontracts			0				
Assigned Subcontracts Subtotal		0					
(Over)/Under		50,000					
Asbestos and/or Lead Paint Removal		1	0				
Assigned Subcontracts			0				
Assigned Subcontracts Subtotal (Over)/Under		0					
Construction Subtotal		49,153,929		İ			-
Assigned Subcontracts		40,100,020	0				
Analysis of Outcombinate Outcomb	Multiple	40.071.057	49,054,927				
Assigned Subcontracts Subtotal		49,054,927					
(Over)/Under		99,002					
OWNER HELD CONTINGENCIES & ALLOWANCES							
Owner Contingency		1,327,919					
Unsuitable Soils Contingency (5,000 CY Remove & Replace)		425,000					
Unsuitable Soils Tipping Fees (5,000 CY)		297,000					
Design Contingecy		52,800					
Design Contingency		1					
Owner Held Contingency & Allowances Subtotal	 	2,102,720		İ			
GRAND TOTAL		60,714,000					
		60,714,000					
Assigned Subcontracts	Multiple		5 8,498,383				TEC

Watertown Wast Water Treatment Facility DRAW BOOK XX - DRAFT REPORT_R10 Commitment Tracker

ITEM	SUBCONTRACTOR	CURRENT BUDGET	Subcontract Value	Vendor Quote (Not Contracted)	Line item budget value carried	Budgets for Consideration	Description / Notes
Assigned Subcontracts Subtotal		58,498,383					
GRAND TOTAL (Over)/Under		2,215,617					

Watertown Wast Water Treatment Facility

DESCRIPTION	VENDOR	DATE	INVOICE #	Prior to	ļ	Jan-24	Feb-24	Mar-24	Apr-24	May-24	TEMPLATE	TOTAL
OFT COSTS				Jan 2024							COLUMN	
ite Investigat	ion											
	3			J								
			TOTAL	\$ -	\$	- \$	- 9	- \$	- \$	-	-	\$
	4]								
	'			_								
			TOTAL	\$ -	\$	- \$	- 9	5 - \$	- \$	-	\$ -	\$
Subsurface Utility	Exploration			1								
oubsurface offinty	Exploration			•								
	Rice Lake (Non GMP Cost)	02/06/24	1			\$	51,933.00					
			TOTAL	\$ -	\$	- \$	51,933.00	5 - \$	- \$	-	\$ -	\$ 51,933
				•				-				
	6			J								
			TO	•				, -			•	•
			TOTAL	\$ -	\$	- \$	- 5	- \$	- \$	-	\$ -	\$
	7]								
			TOTAL	\$ -	\$	- \$	- 9	- \$	- \$	-	\$ -	\$
sbestos Manager	ment			1								
				-								
	GeoTek (Lead Paint Analysis) GeoTek (Asbestos Analysis)	04/15/24 04/24/24	69191 69326					\$	2,758.75 \$	3,831.40		
			TOTAL	\$ -	\$	- \$	- 9	- \$	2,758.75 \$	3,831.40	-	\$ 6,590
	9]								
				_								
			TOTAL	\$ -	\$	- \$	- 9	- \$	- \$	-	\$ -	\$
	10			1								
	'			•								
			TOTAL	\$ -	\$	- \$	- 9	- \$	- \$	-	\$ -	\$
	11			1								
				•								
			TOTAL	\$ -	\$	- \$	- (5 - \$	- \$	-	\$ -	\$
				1								
	12			J								
			TOTAL	\$ -	\$	- \$	- (5 - \$	- \$	-	\$ -	\$
_												
				•								
	eering Design Fees			J								
	eering Design Fees HDR	09/30/22	1200465556	\$ 29,657.50								
	eering Design Fees HDR HDR HDR	09/30/22 11/04/22 12/09/22	1200476016 1200484140	\$ 33,300.25 \$ 55,226.00	5)							
	eering Design Fees HDR HDR HDR HDR HDR	11/04/22 12/09/22 01/11/23	1200476016 1200484140 1200491020	\$ 33,300.25 \$ 55,226.00 \$ 44,248.75	5) 5							
	eering Design Fees HDR HDR HDR	11/04/22 12/09/22	1200476016 1200484140	\$ 33,300.25 \$ 55,226.00	5) 5							
	HDR HDR HDR HDR HDR HDR HDR HDR HDR HDR	11/04/22 12/09/22 01/11/23 02/03/23 03/06/23 04/10/23	1200476016 1200484140 1200491020 1200496767 1200504885 1200512804	\$ 33,300.25 \$ 55,226.00 \$ 44,248.75 \$ 101,065.00 \$ 120,618.15 \$ 267,211.45	5) 5) 5							
	HDR HDR HDR HDR HDR HDR HDR HDR HDR HDR	11/04/22 12/09/22 01/11/23 02/03/23 03/06/23	1200476016 1200484140 1200491020 1200496767 1200504885	\$ 33,300.25 \$ 55,226.00 \$ 44,248.75 \$ 101,065.00 \$ 120,618.15	5) 5) 5							
	HDR HDR HDR HDR HDR HDR HDR HDR HDR HDR	11/04/22 12/09/22 01/11/23 02/03/23 03/06/23 04/10/23 05/15/23 06/08/23 07/13/23	1200476016 1200484140 1200491020 1200496767 1200504885 1200512804 1200521675 1200528173 1200539106	\$ 33,300.25 \$ 55,226.00 \$ 44,248.75 \$ 101,065.00 \$ 120,618.15 \$ 267,211.45 \$ 210,437.61 \$ 271,634.05 \$ 170,215.50	5 5 5 5 5 6 6							
	HDR HDR HDR HDR HDR HDR HDR HDR HDR HDR	11/04/22 12/09/22 01/11/23 02/03/23 03/06/23 04/10/23 05/15/23 06/08/23	1200476016 1200484140 1200491020 1200496767 1200504885 1200512804 1200521675 1200528173	\$ 33,300.25 \$ 55,226.00 \$ 44,248.75 \$ 101,065.00 \$ 120,618.15 \$ 267,211.45 \$ 210,437.61 \$ 271,634.05 \$ 170,215.50 \$ 167,837.17	5 5 6 5 5							
	HDR HDR HDR HDR HDR HDR HDR HDR HDR HDR	11/04/22 12/09/22 01/11/23 02/03/23 03/06/23 04/10/23 05/15/23 06/08/23 07/13/23 08/07/23 09/05/23 10/06/23	1200476016 1200484140 1200491020 1200496767 1200504885 1200512804 1200521675 1200528173 1200539106 1200544591 1200552444 1200560308	\$ 33,300.25 \$ 55,226.00 \$ 44,248.75 \$ 101,065.00 \$ 120,618.15 \$ 267,211.45 \$ 210,437.61 \$ 271,634.05 \$ 170,215.50 \$ 167,837.17 \$ 207,411.03 \$ 212,189.64	5 5 5 5 5 5 6 7 8							
	HDR HDR HDR HDR HDR HDR HDR HDR HDR HDR	11/04/22 12/09/22 01/11/23 02/03/23 03/06/23 04/10/23 05/15/23 06/08/23 07/13/23 08/07/23 09/05/23 10/06/23 11/10/23	1200476016 1200484140 1200491020 1200496767 1200504885 1200512804 1200521675 1200528173 1200539106 1200544591 1200552444 1200560308 1200569015	\$ 33,300.25 \$ 55,226.00 \$ 44,248.75 \$ 101,065.00 \$ 120,618.15 \$ 267,211.45 \$ 210,437.61 \$ 271,634.05 \$ 170,215.50 \$ 167,837.17 \$ 207,411.03 \$ 212,189.64 \$ 334,068.34	5 5 5 5 5 7 8							
	HDR HDR HDR HDR HDR HDR HDR HDR HDR HDR	11/04/22 12/09/22 01/11/23 02/03/23 03/06/23 04/10/23 05/15/23 06/08/23 07/13/23 08/07/23 09/05/23 10/06/23 11/10/23 12/07/23	1200476016 1200484140 1200491020 1200496767 1200504885 1200512804 1200521675 1200528173 1200539106 1200544591 1200552444 1200560308 1200569015 1200576762 1200585002	\$ 33,300.25 \$ 55,226.00 \$ 44,248.75 \$ 101,065.00 \$ 120,618.15 \$ 267,211.45 \$ 210,437.61 \$ 271,634.05 \$ 170,215.50 \$ 167,837.17 \$ 207,411.03 \$ 212,189.64	5	248,849.78						
	HDR HDR HDR HDR HDR HDR HDR HDR HDR HDR	11/04/22 12/09/22 01/11/23 02/03/23 03/06/23 04/10/23 05/15/23 06/08/23 07/13/23 08/07/23 09/05/23 10/06/23 11/10/23 12/07/23 01/08/24	1200476016 1200484140 1200491020 1200496767 1200504885 1200512804 1200521675 1200528173 1200539106 1200544591 1200552444 1200560308 1200569015 1200576762 1200585002 1200593984	\$ 33,300.25 \$ 55,226.00 \$ 44,248.75 \$ 101,065.00 \$ 120,618.15 \$ 267,211.45 \$ 210,437.61 \$ 271,634.05 \$ 170,215.50 \$ 167,837.17 \$ 207,411.03 \$ 212,189.64 \$ 334,068.34	5		288,443.93	207.004.00				
Professional F Architect & Engine	HDR HDR HDR HDR HDR HDR HDR HDR HDR HDR	11/04/22 12/09/22 01/11/23 02/03/23 03/06/23 04/10/23 05/15/23 06/08/23 07/13/23 08/07/23 09/05/23 10/06/23 11/10/23 12/07/23	1200476016 1200484140 1200491020 1200496767 1200504885 1200512804 1200521675 1200528173 1200539106 1200544591 1200552444 1200560308 1200569015 1200576762 1200585002	\$ 33,300.25 \$ 55,226.00 \$ 44,248.75 \$ 101,065.00 \$ 120,618.15 \$ 267,211.45 \$ 210,437.61 \$ 271,634.05 \$ 170,215.50 \$ 167,837.17 \$ 207,411.03 \$ 212,189.64 \$ 334,068.34	5			S 297,994.96	201,006.55			
	HDR HDR HDR HDR HDR HDR HDR HDR HDR HDR	11/04/22 12/09/22 01/11/23 02/03/23 03/06/23 04/10/23 05/15/23 06/08/23 07/13/23 08/07/23 09/05/23 10/06/23 11/10/23 12/07/23 01/08/24 02/06/24	1200476016 1200484140 1200491020 1200496767 1200504885 1200512804 1200521675 1200528173 1200539106 1200544591 1200552444 1200560308 1200569015 1200576762 1200585002 1200593984 1200601104	\$ 33,300.25 \$ 55,226.00 \$ 44,248.75 \$ 101,065.00 \$ 120,618.15 \$ 267,211.45 \$ 210,437.61 \$ 271,634.05 \$ 170,215.50 \$ 167,837.17 \$ 207,411.03 \$ 212,189.64 \$ 334,068.34	5					114,170.52		

 $\label{thm:construction} Agenda\ Item\ 9. (b)\ Approval\ of\ Amendment\ No.\ 3\ with\ Rice\ Lake,\ Constructi...$

Watertown Wast Water Treatment Facility

DESCRIPTION	VENDOR	DATE	INVOICE #	Prior to	Jan-24	Feb-24	Mar-24	Apr-24	May-24	TEMPLATE	TOTAL
15				Jan 2024	Juli 21	. 00 2 .		7.p. 2.	, -	COLUMN	
15				,							
			TOTAL	\$ - :	\$ - :	-	\$ - \$; - ;	· - :	· -	\$
:						:			:	-	<u> </u>
ns/Bonding]							
Firs	st National Bank Omaha	06/13/23		\$ 167.00							
			TOTAL	\$ 167.00	\$ - :	-	\$ - \$		- :	-	\$ 10
						:			:		
17]							
			TOTAL	\$ - :	\$ - :	-	\$ - \$; - \$; - <u>;</u>	-	\$
						· · · · · · · · · · · · · · · · · · ·			:-		
18]							
			TOTAL	\$ - :	\$ - :	· -	\$ - \$			-	\$
				_	-						
ner Representative				J							
.	NFO.	40/40/00	446 400	¢ 00.645.00							
Teg Teg		12/12/23 01/09/24	446.123 446.124	\$ 29,615.00	\$ 29,615.00						
Teg		02/13/24	446.224			29,615.00					
Teg		03/04/24	446.324				\$ 29,615.00				
Teg		04/10/24 05/02/24	446.424				\$		20.615.00		
Teg	gra -	05/02/24	446.524					\$	29,615.00		
			TOTAL	\$ 29,615.00	\$ 29,615.00	29,615.00	\$ 29,615.00	29,615.00	29,615.00	-	\$ 177,69
				-							
ner Representative Re		2.1/22.12.1		J							
Teg Teg		01/09/24 02/13/24	446.124 446.224	;	\$ 129.69	265.32					
Teç		04/10/24	446.424		•	200.02	\$	210.71			
			TOTAL	\$ - :	\$ 129.69	265.32	\$ - \$	210.71	- 9	-	\$ 60
21				n							
21				J							
			TOTAL	\$ - :	\$ - :	-	\$ - \$	- 5	- 9	-	\$
22				1							
22				,							
											_
		-	TOTAL	\$ - :	\$ - !	-	\$ - \$	- 5	- 5	-	\$
23				1							
23				•							
											•
			TOTAL	\$ - :	\$ - 	-	\$ - \$	- ;	- :	-	\$
24				1							
				•							
				- _							_
			TOTAL	\$ -	\$ - !	-	\$ - \$	- 5	- :	-	\$
25				1							
20											
·			TOTAL	\$ -	\$ - !	-	<u> </u>	- (- 5	-	\$
26				1							
20											
				.							
			TOTAL		¢ _ (e _ 0			t _	¢

TOTAL

Watertown Wast Water Treatment Facility

DESCRIPTION	VENDOR	DATE	INVOICE #	Prior to	Jan-24	Feb-24	Mar-24	Apr-24	May-24	TEMPLATE	TOTAL
27	VENDOR	DATE	INVOICE #	Jan 2024	Jan-24	1 60-24	Wiai -24	Api-24	May-24	COLUMN	TOTAL
21											
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - :	<u> </u>
;			TOTAL		-			*	<u> </u>		<u> </u>
28											
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - :	\$
				_			,				
29											
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - 9	<u> </u>
30				П							
'				_							
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - :	\$
:				:						:	
31											
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - !	\$
32											
32				-							
			TOTAL		•			•	•		•
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - :	•
33				1							
				_							
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - :	\$
wner Equipment & I											
obcat / Skidsteer (Tote re	location)										
									•		
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - :	5
36				П							
'				_							
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - 9	<u> </u>
							· ·		<u>* </u>	<u> </u>	<u> </u>
37											
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - :	\$
38				_							
			T07**		•	•	•	•	•	•	•
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - :	•
39				П							
				_							
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - :	
					· · · · · · · · · · · · · · · · · · ·	· ·	:			· ·	
40											
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - :	\$
				_							
41											
			TOTAL	\$ -	\$ -	\$ -	\$ -	\$ -	\$ -	\$ - !	\$

Microsoft Services	Watertown Wast Water Treatmen DRAW BOOK XX - DRAFT REPORT_	R10									
17074			INVOICE #		Jan-24	Feb-24	Mar-24	Apr-24	May-24		TOTAL
46 19704	Misc. Project Expenses				•	·	·				
46 19704											
1505. 1 . 1 . 1 . 1 . 1 . 1 . 1 . 1 . 1 . 1			TOTAL	\$ - : _	<u> - \$</u>	- \$	- \$	- 5	-	\$ -	\$
1079/4	43										
1079/4				_							
1572A			TOTAL	\$ - : -	<u> </u>	- \$	- \$	- 9	-	\$ -	\$
170164. 2	44										
170164. 2											
1701AL S . S . S . S . S . S . S . S . S . S			IOIAL	<u> </u>	\$ - \$	- 5	- \$	- ;	-	\$ -	\$
10764	45			-							
10764			TOTAL	ė	ė ė	¢	¢	:	•	ė	ė
TOTAL TO	40		TOTAL		φ - φ		<u> </u>	· - ·	<u> </u>	-	Ψ
TOTAL 8 - 8 - 8 - 8 - 8 - 8 - 8 - 8 - 8 - 8	46										
TOTAL			ΤΟΤΔΙ	\$ - 9	\$ - ¢			;	. -	.	
107AL 8 . 8 . 8 . 8 . 8 . 8 . 8 . 8 . 8 . 8	47		IVIAL	``	 •		Þ		<u> </u>		<u>*</u>
TOTAL 8				_							
TOTAL 1			TOTAL	\$ - :	s - s	- \$	- \$	· - 9	<u> </u>	\$ -	
1017AL	48				<u>* </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u>. *</u>	_
TOTAL \$	40			-							
TOTAL \$			TOTAL	\$ -	s - s	- \$	- \$	· - 9	,	\$ -	
TOTAL S S S S S S S S S	49			¬	<u>*</u>	<u> </u>	<u> </u>	<u> </u>	<u>- </u>	<u>*</u>	_
State Stat	40			-							
State Stat			TOTAL	\$ -	\$ - \$	- \$	- \$	5	. -	\$ -	\$
Note Construction	Soft Cost Subtotal			\$ 2,617,019.10	\$ 278,594.47 \$						
Note Construction				*							
Rise Lake 95907623 2311-002 \$ 2.895.00	CONSTRUCTION COSTS										
Rice Lake											
Rice Lake 1019328 23140000 \$ 26,956.00 Rice Lake 119522 23140000 \$ 26,956.00 Rice Lake 1195628 23140000 \$ 26,956.00	Pre Construction Rice Lake Rice Lake	06/09/23	2310-002	\$ 26,965.00							
Rise Liske 120023 2310.00 \$ 200.0550 TOTAL \$ 242.6650 \$. \$. \$. \$. \$. \$. \$. \$. \$. \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23	2310-002 2310-003 2310-004	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00							
TOTAL S S S S S S S S S S S S S S S S S S S	Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23	2310-002 2310-003 2310-004 2310-005	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00							
TOTAL S - S - S - S - S - S - S - S - S - S	Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00							
TOTAL S S S S S S S S S S S S S S S S S S S	Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00	\$ - \$	- \$	- \$		<u> </u>	\$ -	\$ 242,6
TOTAL \$. \$. \$. \$. \$. \$. \$. \$. \$. \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00	\$ - \$	- \$	- \$	- 9	<u>.</u>	\$ -	\$ 242,6
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00	\$ - \$	- \$	- \$	- 9	-	\$ -	\$ 242,6
TOTAL \$. \$. \$. \$. \$. \$. \$. \$. \$. \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00							
TOTAL \$. \$. \$. \$. \$. \$. \$. \$. \$. \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00							
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00							
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00	\$ - \$	- \$	- \$; - \$	-	\$ -	\$
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00	\$ - \$	- \$	- \$; - \$	-	\$ -	\$
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00	\$ - \$	- \$	- \$; - \$	-	\$ -	\$
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$	Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00	\$ - \$ \$ - \$	- \$ - \$	- \$ - \$	- \$	\$ -	\$ - \$ -	\$
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00	\$ - \$ \$ - \$	- \$ - \$	- \$ - \$	- \$	\$ -	\$ - \$ -	\$
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00	\$ - \$ \$ - \$	- \$ - \$	- \$ - \$	- \$	\$ -	\$ - \$ -	\$
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL TOTAL TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00 \$ - :	\$ - \$ \$ - \$	- \$ - \$	- \$ - \$; - <u>\$</u>	5 - 5 -	\$ - \$ -	\$
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL TOTAL TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00 \$ - :	\$ - \$ \$ - \$	- \$ - \$	- \$ - \$; - <u>\$</u>	5 - 5 -	\$ - \$ -	\$
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ -	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL TOTAL TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00 \$ - :	\$ - \$ \$ - \$	- \$ - \$	- \$ - \$; - <u>\$</u>	5 - 5 -	\$ - \$ -	\$
	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL TOTAL TOTAL TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00 \$ - :	\$ - \$ \$ - \$	- \$ - \$	- \$ - \$	- \$	5 -	\$ - \$ -	\$ \$
	Pre Construction Rice Lake Rice Lak	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL TOTAL TOTAL TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00 \$ - :	\$ - \$ \$ - \$	- \$ - \$	- \$ - \$	- \$	5 -	\$ - \$ -	\$ \$
Asbestos and/or Lead Paint Removal	Pre Construction Rice Lake Rice Lak	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL TOTAL TOTAL TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00 \$ - :	\$ - \$ \$ - \$	- \$ - \$	- \$ - \$	- \$	5 -	\$ - \$ -	\$ \$
	Pre Construction Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake Rice Lake	06/09/23 07/10/23 08/15/23 09/13/23 10/13/23 11/13/23	2310-002 2310-003 2310-004 2310-005 2310-006 2310-007 2310-008 TOTAL TOTAL TOTAL TOTAL	\$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 26,965.00 \$ 242,685.00 \$ - :	\$ - \$ \$ - \$	- \$ - \$	- \$ - \$	- \$	5 -	\$ - \$ -	\$ \$

TOTAL

Watertown Wast Water Treatment Facility


Cumulative

10/AL 5	ESCRIPTION	VENDOR	DATE	INVOICE #		Prior to Jan 2024	Jan-24	Feb-24	Mar-24	Apr-24	May-24	TEMPLATE COLUMN	TOTAL
\$1 TOTAL	60					Juli 2024						OCLOWING	
### TOTAL													
TOTAL													
TOTAL S S S S S S S S S S S S S S S S S S S	<u> </u>			TOTAL	\$	- \$	- 9	-	<u> </u>	\$ -	\$ -	<u> </u>	\$
107/AL S . S . S . S . S . S . S . S . S . S	61												
107/AL S S S S S S S S S S S S S S S S S S S													
1071AL 2				TOTAL					•				
107AL 3 . 5 . 6 . 5 . 6 . 5 . 5 . 5 . 5 . 5 . 5				IOTAL		- \$	- 3	-	* -	3 -	\$ -	-	3
TOTAL S . S . S . S . S . S . S . S . S . S	62												
TOTAL \$. \$. \$. \$. \$. \$. \$. \$. \$. \$													
TOTAL S . S . S . S . S . S . S . S . S . S				ΤΟΤΔΙ	<u> </u>	- \$			s -	\$ -	<u> </u>	\$ -	<u> </u>
TOTAL S S S S S S S S S S S S S S S S S S S				TOTAL		_		<u>-</u>	<u> </u>	Ψ -	<u> </u>	<u> </u>	Ψ
TOTAL S S S S S S S S S S S S S S S S S S S	63												
10TAL \$. \$. \$. \$. \$. \$. \$. \$. \$. \$													
10TAL \$. \$. \$. \$. \$. \$. \$. \$. \$. \$				TOTAL	\$	- \$	- 5	<u> </u>	\$ -	\$ -	\$ -	\$ -	\$
TOTAL 5 . \$. \$. \$. \$. \$. \$. \$. \$. \$.					<u> </u>	<u> </u>			<u> </u>		<u> </u>		
### TOTAL	64												
### TOTAL													
### TOTAL				TOTAL	<u>\$</u>	_ ¢		· -	\$ -	\$ -	\$ -	\$ -	\$
TOTAL \$. \$. \$. \$. \$. \$. \$. \$. \$. \$:		<u> </u>	<u> </u>	:-	· · · · · · · · · · · · · · · · · · ·	<u>*</u>	: <u>*</u>	<u>*</u>	-; -	: <u>*</u>
TOTAL S S S S S S S S S	65												
TOTAL S S S S S S S S S													
TOTAL S S S S S S S S S S S S S S S S S S S				TOTAL	\$	- \$	- 5	<u> </u>	\$ -	\$ -	\$ -	\$ -	\$
TOTAL \$. \$. \$. \$. \$. \$. \$. \$. \$. \$						<u> </u>			<u> </u>		<u> </u>		· ·
TOTAL S S S S S S S S S	66												
TOTAL S S S S S S S S S													
TOTAL S S S S S S S S S				TOTAL	\$	- \$	- (; -	\$ -	\$ -	\$ -	\$ -	\$
TOTAL S S S S S S S S S	twistian Cubtatal				_	242 695 00 . 6			¢	¢	•	•	\$ 242,6
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$					Ψ	242,003.00 φ	- '	-	y -	Ψ -	<u> </u>	-	Ψ 242,0
TOTAL \$. \$. \$. \$. \$. \$. \$. \$. \$. \$		IGENCIES & ALLOV	WANCES										
TOTAL S S S S S S S S S	er Contingency												
TOTAL S S S S S S S S S													
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$				TOTAL	\$	- \$	- (3 -	\$ -	\$ -	\$ -	\$ -	\$
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$	itable Saile Cantingson	/5 000 CV Damassa 9 D	Danies a)		_								
itiable Soils Tipping Fees (5,000 CY) TOTAL	intable Soils Contingency	y (5,000 Cf Remove & R	Replace)										
itiable Soils Tipping Fees (5,000 CY) TOTAL													
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ 100				TOTAL	\$	- \$	- 5	<u>-</u>	\$ -	\$ -	\$ -	\$ -	\$
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ 100	uitable Soils Tinning Ess	s (5 000 CV)											
ation Basin Sludge Disposal Contingency / Tipping Fees (800 CY) TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ ign Contingency	inable colls ripping ree	3 (3,000 51)											
ation Basin Sludge Disposal Contingency / Tipping Fees (800 CY) TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$ ign Contingency													
TOTAL \$ - \$ - \$ - \$ - \$ - \$ sign Contingency				TOTAL	\$	- \$	- ;	3 -	\$ -	\$ -	\$ -	\$ -	\$
TOTAL \$ - \$ - \$ - \$ - \$ - \$ sign Contingency	tion Basin Sludge Dispo	sal Contingency / Tippir	ing Fees (800 CY)										
ign Contingency	Diange Diape	remailing it in the											
ign Contingency													
				TOTAL	\$	- \$	- ;	· -	\$ -	\$ -	\$ -	\$ -	\$
	an Contingency												
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$	g Containgency												
TOTAL \$ - \$ - \$ - \$ - \$ - \$ - \$													
				TOTAL	\$	- \$	- (· -	\$ -	\$ -	\$ -	\$ -	\$
ner Held Cont & All Subtotal \$ - \$ - \$ - \$ - \$ - \$ - \$	er Held Cont & All Subto	otal			 	- \$. 9	· -	\$ -	\$ -	\$ -	\$ -	\$
AND TOTAL \$ 2,859,704.10 \$ 278,594.47 \$ 370,257.25 \$ 327,609.96 \$ 233,591.01 \$ 147,616.92 \$ - \$	*												

 \$ 2,859,704.10
 \$ 3,138,298.57
 \$ 3,508,555.82
 \$ 3,836,165.78
 \$ 4,069,756.79
 \$ 4,217,373.71
 \$ 4,217,373.71

DESCRIPTION	VENDOR	DATE	INVOICE #	V3
November Services	LSE			
Test & Inspections	AET			
Cx Services	QSE			
Cx Services	QSE			
November Services	Tegra			
November Labor	RJM			
November Material	RJM			
Subtotal of Payable Invoices				\$ -

10/30/2023 Projected Cashflow																										(3
ITEM	SUBCONTRACTOR	CURRENT BUDGET	TOTAL PAID TO DATE	BUDGET BALANCE TO FINISH	PERCENT COMPLETE	Prior to Oct 2022	Oct-22	Nov-22	Dec-22	Jan-23	Feb-23	Mar-23	Apr-23	May-23	Jun-23	Jul-23	Aug-23	Sep-23	Oct-23	Nov-23	Dec-23	Jan-24	Feb-24	Mar-24	Apr-24	TOTAL
SOFT COSTS																								,		7
Site Investigation								Ĭ			Ĭ													Ĭ		
Geotechnical Investigations	0	0	0	0	0%	0	0	0	0	#REF!	#REF!	#REF!	#REF!	#REF!	0	0	0	0	0	0	0	0	0	0	0	#REF!
Environmental Investigations	Rice Lake	51,933	51,933	0	100%	0	0	51,933	0	#REF!	#REF!	#REF!	#REF!	#REF!	0	0	0	0	0	0	0	0	0	0	0	#REF!
Professional Fees																										1
Architect & Engineering Design Fees	HDR	8,569,896	3,737,703	4,832,193	44%	0	C	0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	0	0	0	0	0	0	-5,830	0 #REF!
Architect & Engineering Reimbursables	0	0	0	0	0%	0	1 0) o	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	435	435	435	435	435	0	0	0 #REF!
Pool Consultant	0	500	167	333	33%	0	0	0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	3,476	3,476		3,476		0	0	0 #REF!
Marketing renderings / Legal / Signage / Valuation	Tegra	814,431	177,690	636,741	22%	0	0	0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	0	20,833	20,833	20,833	20,833	20,833	20,833	3 #REF! 7
Parking/Traffic Consultant	Tegra	9,000	606	8,394	7%	0	0	0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	0	0	0	0	0	0	0	0 #REF!
Testing & Inspections	0	0	0	0	0%	2,587,237	248,850	288,444	297,995	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	12,812	12,812		0	0	0	0	0 #REF!
3rd Party Commissioning	0	0	0	0	0%	0		0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	2,000	2,500	3,000	16,387	15,000		0	0 #REF!
Project Management/Legal																										4 7
Owner Representative	0	0	0	0	0%	167	C	0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	17,000	17,000	17,000	0	0	0	0	0 #REF!
Legal	0	0	0	0	0%	0		0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	4,167	4,167	4,167	4,167	4,167	4,167	0	0 #REF!
Owner Equipment & Furnishings																										1
Furniture, Fixtures & Equipment	0	1	0	1	0%	0	C	0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	87,500	0		87,500	20,646	0	0	0 #REF!
Technology & Audio/Video	0	0	0	0	0%	29,615	29,615	29,615	29,615	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	56,250	0	56,250	40,689	0	0	0	0 #REF!
Kitchen Equipment	0	0	0	0	0%	0		0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	0	0	0	53,920	0	0	0	#REF!
Subtotal		9,457,351	3,974,689	5,482,662	42%	2,617,019	278,594	370,257	327,610	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	183,640	61,223	117,973	227,408	61,081	25,000	15,003	
CONSTRUCTION COSTS																										
Construction	Rice Lake	269,650	242,685	26,965	90%	242,685	C	0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	2,035,101	2,442,122	1,628,082	610,531	445,655	103,659	0	0 #REF!
Marketing Enhancements	Rice Lake	48,633,277	0	48,633,277	0%	0	i c	o	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	12,500	12,500	12,500	12,500	12,500	12,500	0	0 #REF!
Owner Provided Pool Items	0	1	0	1	0%	0	0	0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	45,000	45,000				0	0	0 #REF!r
Utility Costs	0	1,000	0	1,000	0%	0		0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	18,505	18,505	18,505	18,505	18,505	18,505	0	#REF!
City/Govt fees	0	0	0	0	0%	0	(c	0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	0	0	0	0	0	0	0	0 #REF!
Subtotal	•	49,153,929	242,685	48,911,244	0%	242,685		0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	2,111,107	2,518,127	1,708,880	641,536	476,660	134,664	0	0 #REF!
CONTINGENCY																										-
Owner Contingency	0	1	0	1	0%	0		0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	0	0	0	0	0	0	0	0 #REF!
Subtotal		2,102,720	0	2,102,720	0%	0		0	0	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	0	0	0	0	0	0	0	0 #REF!
GRAND TOTAL		60,714,000	4,217,374	56,496,626	43%	2,859,704	278,594	370,257	327,610	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	2,294,747	2,579,351	1,826,853	868,944	537,741	159,664	15,003	3 #REF!
RUNNING TOTAL						2,859,704	3,138,299	3,508,556	3,836,166	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	



V3 Center Subcontractor Contract Value & Allowance Tracker - Labor

	Exhibit A	Exhibit A to Original SOV	
	Labor	Difference	Original SOV
Demolition	\$ 277,300	\$ -	\$ 277,300
Concrete & Masonry	\$ 979,634	\$ -	\$ 979,634
Precast Plank & Walls	\$ 490,701	\$ -	\$ 490,701
Structural Steel & Misc Metals	\$ 167,500	\$ -	\$ 167,500
Rough Carpentry	\$ 99,829	\$ -	\$ 99,829
Finish Carpentry	\$ 109,017	\$ -	\$ 109,017
Millwork	\$ -	\$ -	\$ -
Waterproofing	\$ 23,077	\$ -	\$ 23,077
Air & Vapor Barrier	\$ 25,004	\$ -	\$ 25,004
Metal Panels	\$ 254,988	\$ -	\$ 254,988
Roofings	\$ 267,488	\$ -	\$ 267,488
Joint Sealants	\$ 17,055	\$ -	\$ 17,055
Doors, Frames, Hardware	\$ -	\$ -	\$ -
Storefront & Glazing Systems	\$ 270,899	\$ -	\$ 270,899
Gypsum Drywall	\$ 284,850	\$ -	\$ 284,850
Tile & Terrazzo	\$ 103,472	\$ -	\$ 103,472
Acoustical Ceilings & Wall Panels	\$ 70,184	\$ -	\$ 70,184
Wood Athletic Flooring	\$ 14,138	\$ -	\$ 14,138
Carpet & Resilient Flooring	\$ 49,680	\$ -	\$ 49,680
Fluid Applied Flooring or Waterproofing?	\$ 53,652	\$ -	\$ 53,652
Painting & Wallcovering	\$ 80,439	\$ -	\$ 80,439
Operable Partitions	\$ 19,291	\$ -	\$ 19,291
Specialties	\$ -	\$ -	\$ -
Signage & Monument Sign	\$ 24,986	\$ -	\$ 24,986
Lockers & Benches	\$ 40,156	\$ -	\$ 40,156
Appliances	\$ -	\$ -	\$ -
Window Treatments	\$ -	\$ -	\$ -
Aquatics	\$ 468,440	\$ -	\$ 468,440
Elevators	\$ 42,045	\$ -	\$ 42,045
Fire Protection	\$ 67,010	\$ -	\$ 67,010
Plumbing	\$ 579,805	\$ -	\$ 579,805
HVAC	\$ 727,818	\$ -	\$ 727,818
Electrical	\$ 550,639	\$ -	\$ 550,639
Phone & Data	\$ -	\$ -	\$ -
Audio & Visual	\$ -	\$ -	\$ -
Fire Alarm	\$ -	\$ -	\$ -
Security Systems	\$ -	\$ -	\$ -
Earthwork & Utilities	\$ 750,245	\$ -	\$ 750,245
Aggregate Piers	\$ 125,573	\$ -	\$ 125,573
Asphalt Paving	\$ 26,619	\$ -	\$ 26,619
Site Concrete	\$ 92,637	\$ -	\$ 92,637
Site Furnishings	\$ 12,000	\$ -	\$ 12,000
Retaining Walls	\$ 7,735	\$ -	\$ 7,735
Fences & Gates	\$ 3,524	\$ -	\$ 3,524
Landscaping & Irrigation	\$ 41,593	\$ -	\$ 41,593
Surveying	\$ 17,730	\$ -	\$ 17,730
General Conditions	\$ 836,675	\$ -	\$ 836,675
General Requirements	\$ 36,574	\$ -	\$ 36,574
Preconstruction Services	\$ 82,176	\$ -	\$ 82,176
Temp Barriers & Enclosures	\$ 112,293	\$ -	\$ 112,293
Cleaning & Waste Management	\$ 130,024	\$ -	\$ 130,024
GL Insurance	\$ 182,673	\$ -	\$ 182,673
Builders Risk Insurance	\$ 54,413	\$ -	\$ 54,413
Buildings Permit	\$ 168,344	\$ -	\$ 168,344
Bonds/Sub Bonds	\$ 196,146	\$ -	\$ 196,146
Escalation	\$ -	\$ -	\$ -
Construction Contingency	\$ 707,043	\$ -	\$ 707,043
Contractors Fee	\$ 367,950	\$ -	\$ 367,950
Total	\$ 10,111,064	\$ -	\$ 10,111,064
	, .=,	1.	OCO #1R \$ 1,140,552
Subtotal	\$ 10.111.064	1	OCO #11 \$ 1,140,332

Ori	iginal SOV		Changes	٦	urrent SO\
\$	277,300	\$	(84,665)	\$	192,635
\$	979,634	\$	13,755	\$	993,389
\$	490,701	\$	25,340	\$	516,041
\$	167,500	\$	65,919	\$	233,419
\$	99,829	\$	17,783	\$	117,612
\$	109,017	\$	10,681	\$	119,698
\$	-	\$	-	\$	-
\$	23,077	\$	7,067	\$	30,144
\$	25,004	\$	-	\$	25,004
\$	254,988	\$	(41,088)	\$	213,900
\$	267,488	\$	(80,128)	\$	187,360
\$	17,055	\$	(2,455)	\$	14,600
\$	-	\$	-	\$	-
\$	270,899	\$	(74,059)	\$	196,840
\$	284,850	\$	600,324	\$	885,174
\$	103,472	\$	67,379	\$	170,851
\$	70,184	\$	8,588	\$	78,772
\$	14,138	\$	(6,125)	\$	8,013
\$	49,680	\$	21,731	\$	71,411
\$	53,652	\$	9,581	\$	63,233
\$	80,439	\$	32,188	\$	112,627
\$	19,291	\$	7,599	\$	26,890
\$	- 04.000	\$	4.554	\$	- 00 540
\$	24,986	\$	1,554	\$	26,540
\$	40,156	\$	-	\$	40,156
\$		6		\$	
\$ \$	468,440	\$	6,076	\$	474,516
<u>φ</u> \$		\$	0,070	\$	
<u>φ</u> \$	42,045 67,010	\$	5,710	\$	42,045 72,720
<u>Ψ</u> \$	579,805	\$	275	\$	580,080
<u>Ψ</u> \$	727,818	\$	419,046	\$	1,146,864
\$	550,639	\$	154,992	\$	705,63
\$	-	\$	-	\$	-
\$	-	\$	-	\$	-
\$	-	\$	-	\$	-
\$	-	\$	-	\$	-
\$	750,245	\$	126,463	\$	876,708
\$	125,573	\$	(26,493)	\$	99,080
\$	26,619	\$	3,131	\$	29,750
\$	92,637	\$	45,492	\$	138,129
\$	12,000	\$	-	\$	12,000
\$	7,735	\$	(1,535)	\$	6,200
\$	3,524	\$	19,999	\$	23,523
\$	41,593	\$	15,761	\$	57,354
\$	17,730	\$	1,295	\$	19,025
\$	836,675	\$	45,083	\$	881,758
\$	36,574	\$	260,867	\$	297,441
\$	82,176	\$	-	\$	82,176
\$	112,293	\$	22,149	\$	134,442
\$	130,024	\$	11,077	\$	141,101
\$	182,673	\$	10,499	\$	193,172
\$	54,413	\$	3,127	\$	57,540
\$ •	168,344	\$	4,781	\$	173,125
\$	196,146	\$	18,278	\$	214,424
\$ \$	707,043	\$	131,391 (178,522)	\$	131,39° 528,52°
Ψ		-			
\$	367,950	\$	24,454	\$	392,404

47,241

11,293

(60,884)

\$ 173,800	\$ 7,800	\$ 181,600	\$	51,819	Safety
	\$ -	\$ -	\$	117,612	Gen Supt
	\$ -	\$	\$	119,698	Gen Supt
	\$ -	\$ -	\$	-	1
\$ 23,077	\$ 5,110	\$ 28,187	\$	1,957	QC
\$ 25,004	\$ -	\$ 25,004	\$	-	1
\$ 213,900	\$ -	\$ 213,900	\$	-]
\$ 176,010	\$ -	\$ 176,010	\$	11,350	Safety & QC
\$ 14,600	\$ -	\$ 14,600	\$	-]
	\$ -	\$ -	\$	-]
\$ 170,000	\$ 4,500	\$ 174,500	\$	22,340	QC
\$ 598,087	\$ 159,499	\$ 757,586	\$	127,588	Safety
\$ 129,905	\$ 38,966	\$ 168,871	\$	1,980	ļ
\$ 60,184	\$ 18,588	\$ 78,772	\$	-	ļ
\$ 8,010	\$ -	\$ 8,010	\$	3	ļ
\$ 49,483	\$ 21,731	\$ 71,214	\$	197	ļ
\$ 63,233	\$ -	\$ 63,233	\$	(0)]
\$ 99,835	\$ 12,792	\$ 112,627	\$	-	ļ
\$ 11,469	\$ 15,421	\$ 26,890	\$	-	J
	\$ -	\$ -	\$	-	J
\$ 10,840	\$ -	\$ 10,840	\$	15,700	
\$ -	\$ -	\$	\$	40,156	1
	\$ -	\$ -	\$	-	
	\$ -	\$	\$	-	1
\$ 468,440	\$ 480	\$ 468,920	\$	5,596	Safety & QC
\$ 42,045	\$ -	\$ 42,045	\$	-	1
\$ 67,010	\$ 5,710	\$ 72,720	\$	-	1
\$ 483,000	\$ 75,165	\$ 558,165	\$	21,915	Safety
\$ 1,000,500	\$ 104,105	\$ 1,104,605	\$	42,259	1
\$ 574,273	\$ 123,473	\$ 697,746	\$	7,885	
	\$ -	\$ -	\$	-	1
	\$ -	\$ -	\$	-	1
	\$ -	\$ -	\$	-	1
	\$ -	\$ -	\$	-	1
\$ 663,215	\$ 213,093	\$ 876,308	\$	400	1
\$ 130,805	\$ (31,725)	\$ 99,080	\$	-	1
\$ 29,750	\$ -	\$ 29,750	\$	-	1
\$ 128,130	\$ 9,999	\$ 138,129	\$	-	1
\$ -	\$ -	\$ -	\$	12,000	1
\$ 6,200	\$ -	\$ 6,200	\$	-	1
\$ 23,523	\$ -	\$ 23,523	\$	-	1
\$ 53,154	\$ 4,200	\$ 57,354	\$	-	1
\$ 17,730	\$ 1,295	\$ 19,025	\$	-	1
					1
					1
]
\$ 20,970	\$ -	\$ 20,970	\$	120,131	Gen Supt
]
					l

5/16/2023

Current SCS

Value

340 \$ 491,041

192,635

860,628

Original SCS

785,415 \$

490,701 \$

Changes

\$ 6,986,947 \$ 883,741 \$ 7,870,688

- \$

GC's Etc

Tri APM

75,213

174,649 \$ 17,986

Current SOV vs

Current SCS

Difference

132,761

25,000

Safety & QC

Subtotal	\$ 10,111,064		OCO #2	\$
VE Savings	\$ -	\$ -	OCO #3	\$
GMP Total	\$ 10,111,064		OCO #4	\$
			OCO #5	\$
Includes:			OCO #6	\$
Change Order #1 (Revised)			OCO #7	\$
Change Order #2			000 40	•

\$ 586,165 £6 \$ (19,094) (23,161) OCO #8 \$ 32,042 OCO #9 \$ 189,927 Change Order #3 Change Order #4 OCO #10 \$ 116,846 OCO #11 \$ 4,095 OCO #12 \$ 7,658 \$ (308,315) Change Order #5 RJM App #6 SOV & SCS \$ 12,143,745

878,347

V3 Center Subcontractor Contract Value & Allowance Tracker - Material

		Exhibit D to
	Exhibit D	Original SOV
	Material	Difference
Demolition	\$ 17,700	\$ -
Concrete & Masonry	\$ 512,045	\$ -
Precast Plank & Walls	\$ 672,482	\$ -
Structural Steel & Misc Metals	\$ 923,990	\$ -
Rough Carpentry	\$ 41,312	\$ -
Finish Carpentry	\$ -	\$ -
Millwork	\$ 120,541	\$ -
Waterproofing	\$ 44,892	\$ -
Air & Vapor Barrier	\$ 19,438	\$ -
Metal Panels	\$ 255,300	\$ -
Roofings	\$ 339,670	\$ -
Joint Sealants	\$ 1,895	\$ -
Doors, Frames, Hardware	\$ 106,730	\$ -
Storefront & Glazing Systems	\$ 503,098	\$ -
Gypsum Drywall	\$ 594,206	\$ -
Tile & Terrazzo	\$ 100,823	\$ -
Acoustical Ceilings & Wall Panels	\$ 90,276	\$ -
Wood Athletic Flooring	\$ 9,425	\$ -
Carpet & Resilient Flooring	\$ 35,975	\$ -
Fluid Applied Flooring or Waterproofing?	\$ 9,468	\$ -
Painting & Wallcovering	\$ 8,938	\$ -
Operable Partitions	\$ 109,317 \$ 43,265	\$ -
Specialties	\$ 43,265 \$ 20,443	\$ - \$ -
Signage & Monument Sign Lockers & Benches	\$ 110,460	\$ - \$ -
Appliances		
Window Treatments	\$ -	\$ -
Aquatics	\$ 380,060	\$ -
Elevators	\$ 47,382	\$ -
Fire Protection	\$ 74,170	\$ -
Plumbing	\$ 358,523	\$ -
HVAC	\$ 1,522,852	\$ -
Electrical	\$ 1,024,995	\$ -
Phone & Data	\$ -	\$ -
Audio & Visual	\$ -	\$ -
Fire Alarm	\$ -	\$ -
Security Systems	\$ -	\$ -
Earthwork & Utilities	\$ 211,608	\$ -
Aggregate Piers	\$ 5,232	\$ -
Asphalt Paving	\$ 49,434	\$ -
Site Concrete	\$ 78,913	\$ -
Site Furnishings	\$ 40,616	\$ -
Retaining Walls	\$ 14,365	\$ -
Fences & Gates	\$ 40,526	\$ -
Landscaping & Irrigation	\$ 77,245	\$ -
Surveying	\$ -	\$ -
General Conditions	\$ -	\$ -
General Requirements	\$ 218,538	\$ -
Preconstruction Services	\$ -	\$ -
Temp Barriers & Enclosures	\$ -	\$ -
Cleaning & Waste Management	\$ -	\$ -
GL Insurance	\$ - \$ -	\$ -
Buildings Permit		\$ -
Buildings Permit Bonds/Sub Bonds	\$ -	\$ - \$ -
Escalation	\$ 486,092	\$ -
Construction Contingency	\$ -	\$ -
Contractors Fee	\$ -	\$ -
Total	\$ 9,322,240	\$ -
	,,•	

Г		Г		Г	
l					
l	Original		Chamana	_ ا	
\$	SOV 17,700	\$	Changes (17,700)	\$	urrent SOV
\$	512,045	\$	(17,700) 40,754	\$	552,799
\$	672,482	\$	(43,277)	\$	629,205
\$	923,990	\$	(49,700)	\$	874,290
\$	41,312	\$	(19,703)	\$	21,609
\$	-	\$	-	\$	-
\$	120,541	\$	13,242	\$	133,783
\$	44,892	\$	9,920	\$	54,812
\$	19,438	\$	-	\$	19,438
\$	255,300	\$	9,300	\$	264,600
\$	339,670	\$	87,090	\$	426,760
\$	1,895	\$	2,455	\$	4,350
\$	106,730	\$	41,087	\$	147,817
\$	503,098	\$	70,632	\$	573,730
\$	594,206	\$	(359,003)	\$	235,203
\$	100,823	\$	10,910	\$	111,733
\$	90,276	\$	40,306	\$	130,582
\$	9,425	\$	6,125	\$	15,550
\$	35,975	\$	114,918	\$	150,893
\$ \$	9,468 8,938	\$	140,880 6,987	\$	150,348 15,925
\$	109,317	\$	779	\$	
\$	43,265	\$	4,155	\$	110,096 47,420
\$	20,443	\$	(1,553)	\$	18,890
\$	110,460	\$	20,635	\$	131,095
\$	-	Ť	,	\$	-
\$	-	\$	-	\$	-
\$	380,060	\$	4,135	\$	384,195
\$	47,382	\$	-	\$	47,382
\$	74,170	\$	2,176	\$	76,346
\$	358,523	\$	114,082	\$	472,605
\$	1,522,852	\$	(263,538)	\$	1,259,314
\$	1,024,995	\$	113,939	\$	1,138,934
\$	-	\$	-	\$	-
\$	-	\$	-	\$	-
\$	-	\$	-	\$	-
\$	-	\$	-	\$	
\$	211,608	\$	120,208	\$	331,816
\$ \$	5,232 49,434	\$	(5,232) 1,216	\$	50.650
\$	78,913	\$		\$	50,650 51,138
\$	40,616	\$	(27,775) 1,230	\$	41,846
\$	14,365	\$	1,535	\$	15,900
\$	40,526	\$	6,200	\$	46,726
\$	77,245	\$	(3,132)	\$	74,113
\$		\$	-	\$	
\$	-	\$	-	\$	-
\$	218,538	\$	(218,538)	\$	-
\$	-	\$	- 1	\$	-
\$		\$	-	\$	-
\$	-	\$	-	\$	-
\$	-	\$	-	\$	-
\$	-	\$	-	\$	-
\$	-	\$	-	\$	-
\$	-	\$	-	\$	-
\$	486,092	\$	(486,092)	\$	-
\$	-			\$	-
\$		_	/F45 5 55	\$	- 0.044 00-
\$	9,322,240	\$	(510,348)	\$	8,811,892

	Original SCS		Changes	ď	Current SCS Value	С	urrent SOV vs Current SCS Difference
\$		\$	-	\$	-	\$	-
\$	536,975	\$	15,824	\$	552,799	\$	-
\$	627,402	\$	-	\$	627,402	\$	1,803
\$	873,990	\$	(900)	\$	873,090	\$	1,200
\$	-	\$	(000)	\$	-	\$	21,609
\$		\$	-	\$		\$	2.,000
\$	130,776	\$	547	\$	131,323	\$	2,460
\$	44,892	\$	9,920	\$	54,812	\$	2,400
\$	19,438	\$	-	\$	19,438	\$	_
\$	264,600	\$		\$	264,600	\$	
\$	426,760	\$	-	\$	426,760	\$	-
\$	4,350	\$		\$	4,350	\$	
\$	114,467	\$	33,350	\$	147,817	\$	_
\$	560,000	\$	13,730	\$	573,730	\$	
\$	189,719	\$	45,462	\$	235,181	\$	22
\$	79,673	\$	32,060	\$	111,733	\$	
\$	102,702	\$	27,880	\$	130,582	\$	<u> </u>
\$	15,550	\$	27,000	\$	15,550	\$	
-		-		÷		÷	
\$	60,773	\$	90,120	\$	150,893	\$	- E6 000
\$	94,319	\$		\$	94,319	\$	56,029
\$	12,500	\$	3,425	\$	15,925	\$	-
\$	46,287	\$	63,809	\$	110,096	\$	- 47.400
\$		\$	-	\$		\$	47,420
\$	18,890	\$	-	\$	18,890	\$	
\$	169,625	\$	8,060	\$	177,685	\$	(46,590)
\$	-	\$	-	\$	-	\$	-
\$		\$	-	\$		\$	-
\$	380,060	\$	4,135	\$	384,195	\$	-
\$	47,382	\$	-	\$	47,382	\$	-
\$	74,170	\$	2,176	\$	76,346	\$	-
\$	413,308	\$	59,297	\$	472,605	\$	-
\$	1,181,988	\$	77,326	\$	1,259,314	\$	-
\$	1,020,777	\$	118,157	\$	1,138,934	\$	-
\$	•	\$	-	\$	-	\$	-
\$	-	\$	-	\$	-	\$	-
\$	-	\$	-	\$	-	\$	-
\$	-	\$	-	\$	-	\$	-
\$	327,440	\$	4,376	\$	331,816	\$	-
\perp		\$	-	\$	-	\$	-
\$	50,650	\$	-	\$	50,650	\$	-
\$	43,420	\$	7,718	\$	51,138	\$	-
\$	9,016	\$	(300)	\$	8,717	\$	33,129
\$	15,900	\$	-	\$	15,900	\$	-
\$	46,726	\$	-	\$	46,726	\$	-
\$	65,684	\$	8,427	\$	74,111	\$	2
		\$	-	\$	-	\$	-
		\$	-	\$	-	\$	-
		\$	-	\$	-	\$	

\$ 8,070,209 \$ 624,599 \$ 8,694,808

unallocated \$ 1,252,031 \$ (1,134,947) \$ 117,084 \$ 9,322,240 \$ (510,348) \$ 8,811,892 \$ - \$ - \$

5/16/2023

iotai	\$ 9,322,240	> -		Į۶	9,322,240	Þ	(510,348)
			_ OCO #1R	\$	(1,140,551)		
Subtotal	\$ 9,322,240		OCO #2	\$	99,730		
VE Savings	\$ -	\$ -	OCO #3	\$	3,764		
GMP Total	\$ 9,322,240		OCO #4	\$	60,884		
		·	OCO #5	\$	465,825		
Includes:			OCO #6	\$	(408)		
Change Order #1 (Revised)			OCO #7	\$	35,745		
Change Order #2			OCO #8	\$	72,241		
Change Order #3			OCO #9	\$	310,753		
Change Order #4			OCO #10	\$	59,906		
Change Order #5			OCO #11	\$	41,196		
RJM App #6 SOV & SCS			OCO #12	\$	101,580	\$	(621,013)
				\$	9,432,905		

 \$ 117,084
 Net Buyout Savings

 \$ - Adjustments

 \$ 117,084
 Potential Buyout Savings

117,084

V3 Center Subcontractor Contract Value & Allowance Tracker - Combined

		Exhibit D to
	Exhibit D	Original SOV
	1	Difference
Demolition	Material \$ 295,000	
		\$ -
Concrete & Masonry	\$ 1,491,679	s -
Precast Plank & Walls	\$ 1,163,183	•
Structural Steel & Misc Metals	\$ 1,091,490	\$ -
Rough Carpentry	\$ 141,141	\$ -
Finish Carpentry	\$ 109,017	\$ -
Millwork	\$ 120,541 \$ 67,969	\$ -
Waterproofing		\$ -
Air & Vapor Barrier	\$ 44,442	\$ -
Matal Panels Roofings	\$ 510,288 \$ 607.158	s -
•	, , , , , ,	-
Joint Sealants	\$ 18,950 \$ 106,730	\$ -
Doors, Frames, Hardware		1*
Storefront & Glazing Systems	\$ 773,997 \$ 879,056	\$ -
Gypsum Drywall		\$ -
Tile & Terrazzo	\$ 204,295	\$ -
Acoustical Ceilings & Wall Panels	\$ 160,460	\$ -
Wood Athletic Flooring	\$ 23,563	\$ -
Carpet & Resilient Flooring	\$ 85,655	\$ -
Fluid Applied Flooring or Waterproofing?	\$ 63,120	\$ -
Painting & Wallcovering	\$ 89,377	\$ -
Operable Partitions	\$ 128,608	\$ -
Specialties	\$ 43,265	\$ -
Signage & Monument Sign	\$ 45,429	\$ -
Lockers & Benches	\$ 150,616	\$ -
Appliances	\$ -	\$ -
Window Treatments	\$ -	\$ -
Aquatics	\$ 848,500	\$ -
Elevators	\$ 89,427	\$ -
Fire Protection	\$ 141,180	\$ -
Plumbing	\$ 938,328	\$ -
HVAC	\$ 2,250,670	\$ -
Electrical	\$ 1,575,634	\$ -
Phone & Data	\$ -	\$ -
Audio & Visual	\$ -	\$ -
Fire Alarm	\$ -	\$ -
Security Systems	\$ -	\$ -
Earthwork & Utilities	\$ 961,853	\$ -
Aggregate Piers	\$ 130,805	\$ -
Asphalt Paving	\$ 76,053	\$ -
Site Concrete	\$ 171,550	s -
Site Furnishings	\$ 52,616	\$ -
Retaining Walls	\$ 22,100	\$ -
Fences & Gates	\$ 44,050	\$ -
Landscaping & Irrigation	\$ 118,838	\$ -
Surveying	\$ 17,730	\$ -
General Conditions	\$ 836,675	\$ -
General Requirements	\$ 255,112	\$ -
Preconstruction Services	\$ 82,176	\$ -
Temp Barriers & Enclosures	\$ 112,293	\$ -
Cleaning & Waste Management	\$ 130,024	\$ -
GL Insurance	\$ 182,673	\$ -
Builders Risk Insurance	\$ 54,413	\$ -
Buildings Permit	\$ 168,344	\$ -
Bonds/Sub Bonds	\$ 196,146	\$ -
Escalation	\$ 486,092	\$ -
Construction Contingency	\$ 707,043	\$ -
Contractors Fee	\$ 367,950	\$ -
Total	\$ 19,433,304	\$ -

	Γ		Г		Г	
	٦			6 1	١,	
	\$	riginal SOV 295,000	\$	(102,365)	\$	192,635
	\$	1,491,679	\$	54,509	\$	1,546,188
	\$	1,163,183	\$	(17,937)	\$	1,145,246
	\$	1,091,490	\$	16,219	\$	1,107,709
	\$	141,141	\$	(1,920)	\$	139,221
	\$	109,017	\$	10,681	\$	119,698
	\$	120,541	\$	13,242	\$	133,783
	\$	67,969	\$	16,987	\$	84,956
	\$	44,442	\$	-	\$	44,442
	\$	510,288	\$	(31,788)	\$	478,500
	\$	607,158	\$	6,962	\$	614,120
	\$	18,950	\$	41,087	\$	18,950 147,817
	\$	106,730 773,997	\$	(3,427)	s	770,570
	\$	879.056	\$	241,321	\$	1,120,377
	\$	204,295	\$	78,289	\$	282,584
	\$	160,460	\$	48,894	\$	209,354
	\$	23,563	\$	-	\$	23,563
	\$	85,655	\$	136,649	\$	222,304
	\$	63,120	\$	150,461	\$	213,581
	\$	89,377	\$	39,175	\$	128,552
	\$	128,608	\$	8,378	\$	136,986
	\$	43,265	\$	4,155	\$	47,420
	\$	45,429	\$	1	\$	45,430
	\$	150,616	\$	20,635	\$	171,251
	\$	-	\$	-	\$	-
	\$		\$	-	\$	-
	\$	848,500	\$	10,211	\$	858,711
	\$	89,427	\$	7 006	\$	89,427
	\$	141,180 938,328	\$	7,886 114,357	\$	149,066 1,052,685
	\$	2,250,670	\$	155,508	\$	2,406,178
	\$	1,575,634	\$	268,931	\$	1,844,565
	\$	-	\$	-	\$	-
	\$	-	\$	-	\$	-
	\$	-	\$	-	\$	-
	\$	-	\$		\$	-
	\$	961,853	\$	246,671	\$	1,208,524
	\$	130,805	\$	(31,725)	\$	99,080
	\$	76,053	\$	4,347	\$	80,400
	\$	171,550	\$	17,717	\$	189,267
	\$	52,616	\$	1,230	\$	53,846
	\$	22,100 44,050	\$	26,199	\$	22,100
	\$	118,838	\$	12,629	\$	70,249 131,467
	\$	17,730	\$	1,295	\$	19,025
	\$	836,675	\$	45,083	\$	881,758
	\$	255,112	\$	42,329	\$	297,441
	\$	82,176	\$	-	\$	82,176
	\$	112,293	\$	22,149	\$	134,442
	\$	130,024	\$	11,077	\$	141,101
	\$	182,673	\$	10,499	\$	193,172
	\$	54,413	\$	3,127	\$	57,540
	\$	168,344	\$	4,781	\$	173,125
	\$	196,146	\$	18,278	\$	214,424
	\$	486,092	\$	(354,701)	\$	131,391
	\$	707,043	\$	(178,522)	\$	528,521
	\$	367,950	\$	24,454	\$	392,404
ИD		19,433,304	>	1,214,019	٠,	20,647,323
#1R #2	\$	1 146,971				
#2 #3	\$	15,057				
#3 #4	\$	13,037				
	-					

				(Current SCS		C	rrent SOV vs Current SCS	
_	riginal SCS		Changes	L	Value			Difference	
\$	174,649	\$	17,986	\$	192,635		\$	0	
\$	1,322,390	\$	91,037	_	1,413,427		\$	132,761	Safety & QC
\$	1,118,103	\$	340 6,900	\$	1,118,443		\$	26,803	Safety
\$	1,047,790	\$	6,900	\$	1,054,690		\$	53,019 139,221	Gen Supt
\$		\$		\$			\$	119,698	Gen Supt
\$	130,776	\$	547	\$	131,323		\$	2,460	Our oup.
\$	67,969	\$	15,030	\$	82,999		\$	1,957	QC
\$	44,442	\$	-	\$	44,442		\$		
\$	478,500	\$	-	\$	478,500		\$	-	
\$	602,770	\$	-	\$	602,770		\$	11,350	Safety & QC
\$	18,950	\$	-	\$	18,950		\$	-	
\$	114,467	\$	33,350	\$	147,817		\$	-	
\$	730,000	\$	18,230	\$	748,230		\$	22,340	QC
\$	787,806	\$	204,961	\$	992,767		\$	127,610	Safety
\$	209,578	\$	71,026	\$	280,604		\$	1,980	
\$	162,886	\$	46,468	\$	209,354		\$	-	
\$	23,560	\$	- 111 051	\$	23,560		\$	3	
\$	110,256	\$	111,851	\$	222,107		\$	197 56,029	
\$	157,552	\$	16,217	\$	157,552		\$	50,029	
\$	112,335 57,756	\$	79,230	\$	128,552 136,986		\$		
\$		\$		\$	100,000		\$	47,420	
\$	29,730	\$	-	\$	29,730		\$	15,700	
\$	169,625	\$	8,060	\$	177,685		\$	(6,434)	
\$	-	\$	-	\$	-		\$	-	
\$	-	\$	-	\$	-		\$	-	İ
\$	848,500	\$	4,615	\$	853,115		\$	5,596	Safety & QC
\$	89,427	\$	-	\$	89,427		\$	-	
\$	141,180	\$	7,886	\$	149,066		\$	-	
\$	896,308	\$	134,462	\$	1,030,770		\$	21,915	Safety
\$	2,182,488	\$	181,431	\$	2,363,919		\$	42,259	
\$	1,595,050	\$	241,630	\$	1,836,680		\$	7,885	
\$		\$	-	\$			\$	-	
\$	-	\$	-	\$			\$		
\$		\$		\$			\$		
\$	000 655	\$	217,469	\$	1 200 124		\$	400	
\$	990,655 130,805	\$	(31,725)	\$	1,208,124 99,080		\$	-	
\$	80,400	\$	(01,723)	\$	80,400		\$		l
\$	171,550	\$	17,717	\$	189,267		\$		
\$	9,016	\$	(300)	\$	8,717		\$	45,129	
\$	22,100	\$	-	\$	22,100		\$	-	İ
\$	70,249	\$	-	\$	70,249		\$	-	
\$	118,838	\$	12,627	\$	131,465		\$	2	
\$	17,730	\$	1,295	\$	19,025		\$		
\$	-	\$	-						
\$	-	\$	-						
\$	-	\$	-						
\$	-	\$	-						
\$	20,970	\$	-	\$	20,970		\$	120,131	Gen Supt
\$	-	\$	-			_			l
\$		\$		H					
\$		\$							
\$		\$							
\$		\$		H					
\$		\$		Ħ					
	15,057,156		1,508,340	\$	16,565.496		\$	995,432	l
	2,791,058						•	,	•
\$		s	162	\$	333,222		\$	995,432	Net Buyout S
\$	1,252,031	\$(1,134,947)	\$	117,084		\$	57,000	Gen Supt,Q0
	19,433,305						\$	50,000	Railing Allow
							\$		Envelope Te

5/16/2023

Subtotal	\$ 19,433,304		OCO #2	\$ 146,971		
VE Savings	\$ -	\$	OCO #3	\$ 15,057		
GMP Total	\$ 19,433,304		OCO #4	\$ -		
	-		OCO #5	\$ 1,051,990		
Includes:			OCO #6	\$ (19,502)		
Change Order #1 (Revised)			OCO #7	\$ 12,584		
RJM App #3 SCS			OCO #8	\$ 109,238		
				\$ 20,749,644	\$ (102,32	21)

Ś	(73.791)	Potential Buyout Savings	1
\$	15,000	Monument Sign	1
\$	333,222	Tri APM	1
\$	214,000	Tri Supt	1
\$	360,000	Rough/Finish Carp & Cleaning	l
\$	25,000	MEP Coordination	J
\$	15,000	Envelope Testing	J
\$	50,000	Railing Allowance	l
\$	57,000	Gen Supt,QC.Safety	l
\$	995,432	Net Buyout Savings	ı

RJM Labor RJM Material Total

Starting Contract \$10,111,064.00 \$9,322,240.00 \$19,433,304.00

OCO #1R \$1,140,552.00 \$(1,140,551.00) \$1,243,304.00

OCO #2 \$47,241.33 \$99,729,72 \$146,971.05

OCO #3 \$11,293.08 \$3,764.00 \$15,067.08

OCO #4 \$(60,884.00) \$60,884.00 \$-0

OCO #5 \$586,164.92 \$465,825.45 \$1,051,990.37

OCO #6 \$(19,094.09) \$(408.00) \$(115,502.09)

OCO #7 \$(23,160.52) \$35,745.00 \$12,584.48

OCO #8 \$32,042.30 \$72,241.49 \$104,283.79

OCO #9 \$189,927.30 \$310,752,75 \$500,880.05

OCO #10 \$116,845.55 \$9,905.66 \$176,751.21

OCO #11 \$40,94.87 \$41,196.47 \$45,291.34

Current Contract \$12,136,086.74 \$9,331,325.54 \$21,467,412.28



Agenda Item

Subject: Approval of Change Order No. 1 for the 2024 Solid Waste Pavement Rehabilitation,

Project No. 2412, with Duininck Inc., for an increase of \$156,496.00 for a new

TERTOWN

contract price of \$423,796.00.

Meeting: City Council - Jun 03 2024

From: Amanda Mack, City Manager

BACKGROUND INFORMATION:

This change order is for additional quantities of removal and asphalt concrete to extend the paving limits. This project came in under budget and the Solid Waste division would like to use the additional funds to extend area to be paved.

The pavement rehabilitation will aid in the overall cleanliness of the Landfill facility and improve the access functionality up to and around the buildings, the scale, and load-carrying capacity of the Landfill entrance/exit for both staff and customers. Currently, in the absence of pavement, the gravel surfacing is in constant need of reshaping and reconditioning in order to effectively keep up with the damages caused by truck traffic. The weather impacts the area often which leads to muddy and rutted surface conditions.

FINANCIAL CONSIDERATIONS:

The funding for this project has been budgeted in the Capital Improvement Fund, Account 605-43240-43900, in the amount of \$435,000.00.

With approval of the bid at \$267,300.00 and Change Order No. 1 at \$156,496.00, the new contract amount is \$423,796.00, which is \$11,204.00 under budget.

OVERSIGHT / PROJECT RESPONSIBILITY:

Heath VonEye, Asst. City Mgr./Public Works Director Justin Petersen, City Engineer Kraig Engen, Project Manager Scott Davis, Solid Waste Superintendent

STAFF RECOMMENDATION / SUGGESTED MOTION:

Staff recommends approval of the change order with the following motion:

I move to approve Change Order No. 1 for the 2024 Solid Waste Pavement Rehabilitation, Project No. 2412, with Duininck Inc., for an increase of \$156,496.00 for a new contract price of \$423,796.00.

ATTACHMENT(S):

Change Order #1
Vicinity Map
Additional Quantities

CHANGE ORDER NO.: 1

Owner: City of Watertown, SDOwner's Project No.: 2412Engineer: Kraig EngenEngineer's Project No.:2412Contractor: Duininck, Inc.Contractor's Project No.:

Project: 2024 Solid Waste Improvements Contract Name: 2024 Solid Waste Improvements

Date Issued: 05/16/2024 Effective Date of Change Order: 05/22/2024

The Contract is modified as follows upon execution of this Change Order:

Description: Additional removal and asphalt concrete quantities to extend paving limits.

Attachments: See attached summary of quantities.

Change in Contract Price

Change in Contract Times

enunge in contract i nec	change in con				
inal Contract Price:	Original Contract Times:				
	Substantial Completion:	September 27, 2024			
267,300.00	Ready for final payment:	October 25, 2024			
rease] [Decrease] from previously approved	[Increase] [Decrease] from previou	sly approved Change Orders			
nge Orders No. 1 to No.	No.1 to No. [Number of previous C	hange Order]:			
	Substantial Completion:	N/A			
N/A	Ready for final payment:	N/A			
tract Price prior to this Change Order:	Contract Times prior to this Change Order:				
	Substantial Completion:	July 1, 2024			
267,300.00	Ready for final payment:	August 1, 2024			
ease this Change Order:	No Change this Change Order:				
	Substantial Completion:	N/A			
156,496.00	Ready for final payment:	N/A			
tract Price incorporating this Change Order:	Contract Times with all approved Cl	nange Orders:			
	Substantial Completion:	September 25, 2024			
423,796.00	Ready for final payment:	October 25, 2024			
	rease] [Decrease] from previously approved nge Orders No. 1 to No. N/A tract Price prior to this Change Order: 267,300.00 rease this Change Order: 156,496.00 tract Price incorporating this Change Order:	Ginal Contract Price: 267,300.00 Prease] [Decrease] from previously approved nge Orders No. 1 to No. N/A Tract Price prior to this Change Order: 267,300.00 Prease this Change Order: 156,496.00 Tract Price incorporating this Change Order: Contract Times prior to this Change Order: Substantial Completion: Ready for final payment: Contract Times prior to this Change Substantial Completion: Ready for final payment: No Change this Change Order: Substantial Completion: Ready for final payment: Contract Times with all approved Change Order: Substantial Completion: Contract Times with all approved Change Order: Substantial Completion:			

	Recommended by Engineer (if required)	Accepted by Contractor
Ву:		Patrick Hand
Title:		Project Manager
Date:		05/16/2024
	Authorized by Owner	Approved by Funding Agency (if applicable)
Ву:		
Title:	-	
Date:		

Progress Estimate - Unit Price Work

Contractor's Application for Payment

Owner: Engineer: Contractor Project:	eer: Kraig Engen actor: Duininck, Inc.								Owner's Project No.: Engineer's Project No.: Contractor's Project No.:			
Contract:	2024 Solid Waste Improvements											
Application	No.: 1 Applica	tion Period: From	04/18/24	to	05/18/24	_			Applic	ation Date:	05/18/24	
Α	В	С	D	E	F	G	Н	1	J	K	L	
			Cont	ract Information		Work C	Completed					
Bid Item No.	Description	Item Quantity	Units	Unit Price (\$)	Value of Bid Item (C X E) (\$)	Estimated Quantity Incorporated in the Work	Value of Work Completed to Date (E X G) (\$)	Materials Currently Stored (not in G) (\$)	Work Completed and Materials Stored to Date (H + I) (\$)	% of Value of Item (J / F) (%)	Balance to Finish (F - J) (\$)	
	2000	110111 (2111111)			iginal Contract		(+)	(+)	(+)	(/-/	(47	
1	Mobilization	Lum	p Sum	\$ 20,000.00	20,000.00	-	-	-	-	0%	20,000.00	
2	Remove Asphalt Concrete	48	2 S.Y.	\$ 14.00	6,748.00	-	-	-	-	0%	6,748.00	
3	6" Asphalt Concrete Composite		8 S.Y.	\$ 39.00	220,272.00	-	-	-	-	0%	220,272.00	
4	Unclassified Excavation	74	0 C.Y.	\$ 27.00	19,980.00	-	-	-	-	0%	19,980.00	
5	Inlet Protection		1 EA	\$ 300.00	300.00	-	-	-	-	0%	300.00	
					-	-	-	-	-		-	
					-	-	-	-	-		-	
			Origi	nal Contract Totals	\$ 267,300.00		\$ -	\$ -	\$ -	0%	\$ 267,300.00	
					hange Orders							
1A	Mobilization	Lum	p Sum	\$ 10,000.00	10,000.00	_	-	_	-	0%	10,000.00	
	Remove Asphalt Concrete		6 S.Y.	\$ 14.00	7,644.00	_	_	-	-	0%	7,644.00	
	6" Asphalt Concrete Composite		2 S.Y.	\$ 39.00	124,488.00	-	-	-	-	0%	124,488.00	
1A	Unclassified Excavation	53	2 C.Y.	\$ 27.00	14,364.00	-	-	-	-	0%	14,364.00	
					-		-		-		-	
					-		-		-		-	
			Cł	ange Order Totals	\$ 156,496.00		\$ -	\$ -	\$ -	0%	\$ 156,496.00	
				Original Corr	tweet and Chance Or	4						
				-	tract and Change Or		l ¢	l é	l ¢	0%	ć 422.70C.00	
				Project Totals	\$ 423,796.00		\$ -	\$ -	\$ -	0%	\$ 423,796.00	

Agenda Item 9.(d) Approval of a Bid Award for the 2024 Golf Course Impro...





Agenda Item

Subject: Approval of a Bid Award for the 2024 Golf Course Improvements, Project No. 2420,

to Creative Vision Landscape and Design in the amount of \$128,800.00.

Meeting: City Council - Jun 03 2024

From: Amanda Mack, City Manager

BACKGROUND INFORMATION:

On May 21, 2024, two (2) bids were received for the 2024 Golf Course Improvements, Project No. 2420. Creative Vision and Design of Watertown, SD had the lowest bid of \$128,800.00.

The Cattail Crossing Improvements will include installing a new paver patio, a covered patio, and a concrete golf cart turn-around.

FINANCIAL CONSIDERATIONS:

The funding for this project has been budgeted in the Park & Recreation Capital Improvement Fund, Golf Course Projects account 212-45182-43991, in the amount of \$280,000.00 and Clubhouse Improvements account 212-45182-43990, in the amount of \$40,000.00.

OVERSIGHT / PROJECT RESPONSIBILITY:

Heath VonEye, Asst. City Mgr./Public Works Director Justin Petersen, City Engineer Dusty Rodiek, Park, Recreation & Forestry Director Kraig Engen, Engineer Technician/Project Manager Levi Pearson, Golf Operations Manager

STAFF RECOMMENDATION / SUGGESTED MOTION:

Staff recommends approval of this bid award through the following motion:

I move to approve a Bid Award for the 2024 Golf Course Improvements, Project No. 2420, to Creative Vision Landscape and Design in the amount of \$128,800.00.

ATTACHMENT(S):

Vicinity Map

Bid Tabulation

Estimate of Quantities 2024 Cattail Crossing Improvements Project No. 2420 City of Wytertown, South Delete			Creative Vi 700 14 Watertow	Mack Landscaping 804 4th Ave. N Castlewood, SD 57223 Ph: 605-880-6001				
ITEM	City of Watertown, South Dakota TEM ITEM ESTIMATED		Ph: 605-956-0353 ITEM ITEM		ITEM	5-880	ITEM	
NO.	DESCRIPTION	QUANT	TTY	PRICE	TOTAL	PRICE		TOTAL
	42' x 18' Covered Patio with Surronding Paver Patio and 75 SY Concrete Turn-around	Lump	Sum	\$ 128,800.00	\$ 128,800.00	\$ 206,927.00	\$	206,927.00
				Bid Total:	\$ 128,800.00	Bid Total:	\$	206,927.00



City Council

Agenda Item

Subject: Approval of Quote Awards to multiple vendors for the Information Technology,

Audio & Video, and Data Cabling and Networking packages for the Wells Fargo Renovation and Addition for City Hall, Project No. 2035, in the total amount of

\$329,925.87.

Meeting: City Council - Jun 03 2024

From: Amanda Mack, City Manager

BACKGROUND INFORMATION:

These quotes are from multiple vendors for the Information Technology package provided to the City for the Wells Fargo Renovation and Addition for City Hall project. The IT package includes cabling, some conduit, network racks, fiber, battery back-ups, security door access and cameras, digital signage and TV/video/presentation monitors for conference rooms and offices, and AV equipment for the City Council Chambers, the main Basement conference room, and the remaining meeting rooms throughout. The package total is \$329,925.87, which is less than the budgeted \$400,000 for the project.

- Mid States: \$181,927.82 (Audio/Video, Camera, multiple conference rooms)
- Karl's: \$8,924.80 (Digital Signage/Presentation Monitors)
- WMU: \$13,989.31 (Network Cabling)
- Swiftel: \$47,660.00 (Communications Cabling)
- Connecting Point: \$4,850.26 (Network Gear-Racks)
- Connecting Point: \$22,842.00 (Network Gear-Switches/Firewalls)
- ESEind, Inc: \$42,545.00 (Security Cameras and Door Access Control equipment)
- Connecting Point: \$7,186.68 (Teleconferencing)

Total: \$ 329,925.87

The City will also have Owner-provided FF&E, interior signage, and geotechnical testing as part of this project that staff have yet to finalize and bring forth. With all remaining quotes and bids, the total estimated cost for this project is \$5,369,682.00.

FINANCIAL CONSIDERATIONS:

There is \$10,241,463.46 remaining in the Capital Improvement Fund, Account 505-45603-43202, to be used for this project.

OVERSIGHT / PROJECT RESPONSIBILITY:

Peter Boyle, IT Director Heath VonEye, ACM/PWD

STAFF RECOMMENDATION / SUGGESTED MOTION:

Staff recommends approval of these quote awards through the following motion:

I move to approve the Quote Awards to multiple vendors for the Information Technology, Audio & Video, and Data Cabling and Networking packages for the Wells Fargo Renovation and Addition for City Hall, Project No. 2035, in the total amount of \$329,925.87.

ATTACHMENT(S):

Audio and Video City of Watertown SD P-1217 (2)

Digital Signage - Karls-TV-New-City-Hall

Network Cabling - Estimate for Fiber to New City Hall - (5-2-2024)

Network Cabling - Watertown City Hall-Communications Cabling-R1

Network Gear - Racks - CityHall-Network-Racks

Network Gear - switches and firewalls -City of Watertown IT Dept. - Meraki MS130 & MR46 2025

Budget

Security-cameras-13798

Security-doorAccess-13797

Teleconferencing-Logitech-Rally-Bar

City Hall Budget Summary-Cost to Finish



Proposal To:

City of Watertown SD

23 2nd Street NE Watertown, SD 57201

For:

Watertown City Hall-Watertown SD

May 30, 2024

 ${\sf Sales\ Contact:\ Steve\ Ver\ Maas}$

Project Version: 3

P-1217

Page 67 of 206



Confidentiality Agreement

The information contained in this proposal from Mid States Audio, Inc. is privileged and confidential information, intended only for the use of the entity named as recipient. Any disclosure or use of this proposal/design not authorized by Mid States Audio, Inc. is strictly prohibited. This includes utilizing design to use as a bid specification. If any portion of design is to be used without written permission from Mid States Audio, Inc, a 5% of total price design fee will be assessed to the undersigned. By signing this affidavit, the undersigned agrees to all the terms of the Confidentiality Agreement. Notice is given that any dissemination or copying of this proposal or information contained herein, is strictly prohibited and punishable by law.

Company:	 	 	
Print:			
Signature: _	 	 	
Title:		 	
Date:			



CITY COMMISSION MEETING 153

AUDIO

IMAGE

QTY DESCRIPTION



L Mid States Audio & Video Installation Re-Location of Existing Owner Erquipment



1 Middle Atlantic LT-GN-PNL 1SP, DUAL LED LIGHT PANEL



2 Middle Atlantic PDX-920R-SP 20A 9 OUT SERIES SURGE W/CTRL



LEA Professional CONNECT 354D 4 Channel x 350 watt @ 4 ohms, 8 ohms, 70V and 100V per channel. Internal DSP w/ Crossovers and Dante, IoT Device with built in WiFi Hotspot, Wifi or FAST Ethernet connectivity and Highly Efficient Power Supply with Class D Output Stage



QSC AD-C4T-ZB-WH 4.5" Two-way ceiling speakers, 70/100V transformer with 16Ohm bypass, zero bezel design, 150° conical DMT coverage, includes C-ring and rails for blind mount installation. Priced indvidually, must be purchased in pairs. White Only.



Shure MX400DP Small Desktop Base with input, switched preamplifier, programmable logic switch and LED. Supports standard and light ring microphones



Shure MX415RLPDF/C 15" Shock-Mounted Gooseneck, Red LED Ring on top, Less Preamplifier, Dual Flexible, Cardioid



1 SmartWire 1802P-WHT 18-02 UNS STR CMP Wht Jkt BR



1 Mid States Audio & Video Miscellaneous Hardware



1 Middle Atlantic U2V 2SP VENTED UTILITY SHELF



2 Middle Atlantic PDT-2020C-RN 20 OUT20ASRG&NFYCORD



1 Middle Atlantic SR28-46-32 28W/46SP/32D SWING WALLRK



IMAGE

QTY DESCRIPTION



Middle Atlantic LVFD28-46 28W/46SP SR PERF FRNT DR



1 Mid States Audio & Video Installation Programming of New Equipment For Use with Qsys

AUDIO TOTAL

\$53,749.08

VIDEO

IMAGE

QTY DESCRIPTION



LG Electronics 75UR640S9UD HDMI(3), USB(1), WIFI, RF In, R Out(RS-232C), RJ45, Audio Out, External Speaker Out (Amplifier NOT included)



4 Chief TS525TU THIN SWING ARM (LARGE)



ASUS MB17AHG Full HD, IPS, 144Hz, USB Type-C, FreeSync Premium, Eye Care, L-shaped kickstand, Tripod Mountable, HDMI, FSC Certified, 3-Year Warranty, BLACK



2 Crestron HD-DA4-4KZ-E 1:4 HDMI Distribution Amplifier w/4K60 4:4:4 & HDR Support



L Netgear GSM4248UX-100NAS AV LINE M4250-40G8XF-POE++ 40X1G ULTRA90



2 Crestron HD-DA8-4KZ-E 1:8 HDMI Distribution Amplifier w/4K60 4:4:4 & HDR Support



1 Epson V12H758020 EPSON DC-21 Document Camera



, QSC NV-21-HU 4K60 4:4:4 Network Video Endpoint for Q-SYSEcosystem, (Decoders). 1 HDMI 2.0 Input, 1 USB-C Input, 1 HDMI 2.0 output.



QSC NV-21-HU 4K60 4:4:4 Network Video Endpoint for Q-SYSEcosystem, software configurable as (Encoder) . 1
HDMI 2.0 Input, 1 USB-C Input, 1 HDMI 2.0 output.



4 West Penn Wire 254346AWH1000 4P 23G CAT6A UTP CMP



programming.

11 C2G C2G10380 15ft/4.5m UltraFlex Active HDMI Cable 4K



IMAGE

QTY DESCRIPTION



4 C2G C2G10376 3ft/0.9m Ultra Flexible HDMI Cable 4K



2 Middle Atlantic UMS1-11.5K 1SP UM SHELF,11.5"D,KIT

VIDEO TOTAL

\$62,715.18

CAMERA CAPTURE

IMAGE

QTY DESCRIPTION



1 Blackmagic Design SWPANELADV1ME10 ATEM 1 M/E Advanced Panel 10



Blackmagic Design BMD-SWATEMPSW1ME4K Blackmagic Design SWATEMPSW1ME4K ATEM 1 M/E Production
Studio 4K Production Switcher



West Penn Wire 254346AWH1000 4P 23G CAT6A UTP CMP



1 SmartWire RG6HDP-WHT RG6U HDSDI CMP Wht Jkt



1 Mid States Audio & Video Miscellaneous Hardware



4 QSC NC-12x80 12x Optical Zoom 80° Horizontal Field of View, PTZ Network Camera, PoE, with HDMI and SDI output. Includes PTZ-WMB1 wall mount bracket



4 Nigel B Design NB-AVCB-W White Finish Anti-Vibration Multi-Camera Mounting Bracket (Fits PTZ Cameras that use 1/4".20 Tripod Fittings)



PTZOptics PTZ-PTSUPERJOYG1 PTZOptics PT-SUPERJOY-G1 SuperJoy PTZ Camera Joystick Controller with Simultaneous NDI / HX - IP & Serial Control



1 Blackmagic Design CONVMSDIDA Blackmagic CONVMSDIDA 1x8 3G SDI Distribution Amplifier Mini Converter

CAMERA CAPTURE TOTAL

\$36,510.14

CONFERENCE

IMAGE QTY DESCRIPTION



IMAGE

QTY DESCRIPTION



QSC NV-21-HU 4K60 4:4:4 Network Video Endpoint for Q-SYSEcosystem, software configurable as Encoder or Decoder. 1 HDMI 2.0 Input, 1 USB-C Input, 1 HDMI 2.0 output. Optional Software License to enable AV Bridging (SLQBR-P).



QSC SLQBR-P Q-SYS AV Bridging feature license. One license is required per TSC Series Gen 3 touch screen controller with AV Bridging enabled. Perpetual. For TSC-70-G3 & TSC-101-G3 & NV-21-HU



1 QSC NV-21-PSU 12v 10a Aux Power Supply for NV-21-HU to enable USB-C device charging



1 C2G C2G28887 6FT 2M THUNDERBOLT4 USBC-C ACTIVE (40GB)



1 C2G CG54428 6in(.15m) USB C Female to USB A Male 3.0



1 C2G C2G10377 6ft/1.8m Ultra Flexible HDMI Cable 4K



2 Shure MXA920W-S Ceiling Array Microphone, Square, White, 24 inch



1 QSC SLDAN-32-P Q-SYS Software-based Dante 32x32 Channel License, Perpetual.



QSC SLQBR-P Q-SYS AV Bridging feature license. One license is required per TSC Series Gen 3 touch screen controller with AV Bridging enabled. Perpetual. For TSC-70-G3 & TSC-101-G3 & NV-21-HU

CITY COMMISSION MEETING 153 TOTAL	\$173,264.82
SHIPPING & HANDING	\$4,677.38
CONFERENCE TOTAL	\$15,613.04



OPTIONAL 86" DISPLAYS

VIDEO

IMAGE

OTY DESCRIPTION

(Launcher Bar), Quick Access, Web Browser, Pre-loaded App (YouTube only), SDP Server compatibility, SW Clock (World Clock / Alarm), Mood Display, Soft AP, WiFi Version (02. 11ac), Screen Share (Miracast), Smart Share, compatible LG ThinQ App, DIAL, Bluetooth Audio Playback, Mobile Connection Overlay, HDMI-ARC, USB Cloning, SNMP, Self Diagnostics, SI Compatible Protocol (TVLink Tuner), HTNG-CEC, Simplink(HDMI-CEC), IR Out, Multi IR Code, Hotel Mode / PDM / Installer Menu, Lock mode (Limited), Port Block, Welcome Screen (Splash Image), Insert Image, IP Channel Manager, External Speaker Out, , RJP (remote jack pack) Compatibility, Teleadapt/Guestlink (HDMI CEC), Moving Picture Playback (SD/HD/Plus HD), Auto Off / Sleep Timer, Energy Saving mode, Motion Eye Care, Vertical Setup, Fail Over, Play Via URL, NTP Server Setting, Crestron Certi. Compatibility, DPM (Digital Power management), Time scheduler, RTC (Real Time Clock), NTP sync timer, BEACON, Embedded CM (contents manager), Embedded GM (Group manager), Promota, SuperSign SW Compatibility - Control / Control Plus, CMS(Premium), Simple Editor, LG Connected Care, HDMI In 3 (2.0), USB1 (2.0), RF In, Digital Audio Out (Optical), Audio Line

LG Electronics 86UR640S9UD 86" UHD, 3840 X 2160 (UHD), (webOS 6.0, (NOT SCAP support)), Smart Home



CREDITS FOR REPLACED ITEMS



LG Electronics 75UR640S9UD HDMI(3), USB(1), WIFI, RF In, R Out(RS-232C), RJ45, Audio Out, External Speaker Out (Amplifier NOT included)

OPTIONAL 86" DISPLAYS TOTAL

Out(3.5mm phone jack), RJ45 (Usage Purpose), Safety - UL, EMCFCC, EPEAT, ISTA6

CREDITS \$-9,157.52

SUMMARY

-\$2,941.98

MID STATES CARE - SELECT LEVEL AGREEMENT

Select Agreement

The Mid States Select Agreement covers all items in a given room or room(s) as part of a larger system agreement. The Select Agreement includes a guaranteed response time, emergency number, and Mid States assumes all the costs of parts (covered by manufacturer's warranty) and labor. We work with major manufacturers to facilitate rapid response for manufacturer warranted equipment. Select Agreements also include up to 4 hours of re-programming control systems should you upgrade a specific component of the system or require minor functionality changes once in use.

Select Service Level Agreement

Covered Items

- Phone response within two (2) hours (during normal business hours M-F)
- Phone support by Technician
- On-site response (if needed) within two (2) business days
- All parts and labor (within manufacturer's warranty)
- Travel to and from site
- Removal, re-installation, and manufacturer service of equipment
- Up to four (4) hours of control system re-programming to accommodate changes
- Annual review of systems with recommended upgrades (if applicable)

Excluded items:

- Consumables (batteries, lamps, etc.)
- Owner furnished equipment
- Items damaged due to improper use

	AND CTATES CADE. CELECTLEVEL A CREENAGUE	. #0 //0 00
Contract Auto Renews Annually		

MID STATES CARE - SELECT LEVEL AGREEMENT

+\$8,663.00

P-1217

ACCEPTANCE

AUDIO & VIDEO

TERMS

I accept this proposal and hereby authorize Mid States Audio & Video to proceed with the installation of the included systems at the facilities of City of Watertown SD constructing at 23 2nd Street NE Watertown, SD 57201 as described in the totality of this document. I further authorize Mid States Audio & Video to be granted the facility access that will be required to complete this project in a workmanlike and timely manner and for payment to be made to Mid States Audio & Video. In keeping with the Terms of Payment listed above: It has been made clear to me that there exist no understandings regarding this project with any relevant party unless and until City of Watertown SD and Mid States Audio & Video agree to such additional or alternate understandings in writing. Project cost and pricing are dependent upon a continual flow of work without interruption or delays imposed by City of Watertown SD or their staff, construction, other building trades or any other party, and additional costs may be incurred by City of Watertown SD from Mid States Audio & Video. If such delays result in additional costs that are not covered by the pricing in this proposal: I agree that any additions to and/or deletions from the materials and labor to be provided by my acceptance of this proposal and any resulting change(s) in cost of this project shall only be by way of written change order(s) and shall be valid only after being signed by City of Watertown SD and Mid States Audio & Video. This proposal is valid only if accepted in writing by City of Watertown SD and deposit payment received no later than 30 days from date on this proposal.

The completed system carries a ninety (90) day warranty against defective materials and workmanship including labor; in some instances the manufacturer warranty may be longer. This guarantee does not cover replacement of parts due to fire, flood, lightning, vandalism, or improper use of equipment.

ACCEPTANCE

CITY OF WATERTOWN 3D	
SIGNED	DATE
PRINT NAME	TITLE
MID STATES AUDIO & VIDEO	
SIGNED	DATE
PRINT NAME	



NEXSYS_™

FEATURES

- Available in 15A and 20A
- 9 outlets
- Protect your equipment from a surge with superior surge protection on all NEXSYS PDUs. NEXSYS
 PDU's always have surge protection. Choose from enhanced multi-stage MOV or the patented Series
 Protection™ Surge technology.
- Worried about the under/over voltage? Don't. With the selectable on/off voltage protection from the front of the unit, it gives the option to protect sensitive equipment from over/under voltage scenarios.
 - If the voltage protection is on and an over or under voltage event happens the outlets will automatically be turned off to protect the equipment. Once the power restores within the acceptable voltage range the PDU will automatically turn the outlets back on.
- Be in the know. Remote notification of surge status via remote contact closure.
- **IEC Inlet:** Allows for cleaner cable management by selecting your desired length of power cord.
 - A standard 10' cord is included with all models







SPECIFICATIONS

NEXSYS Rackmount

EIA compliant 19" Rackmount power distribution unit shall be Middle Atlantic Products model # PDX-___ (refer to chart), with a __ amp power capacity (refer to chart), multi-stage MOV surge and spike protection L − N with no surge diversion to ground or patented non-sacrificial Series Surge with EMI filtering. Rackmount power distribution unit shall operate on 120 volt AC 60Hz frequency. Rackmount power distribution unit shall include 10' SignalSAFE™ IEC power cord with NEMA 5-__ plug (refer to chart), 8 rear outlets, 1 front outlet, and __ amp circuit breaker located on the power distribution unit's rear. Rackmount power distribution unit shall occupy one rackspace unit. Rackmount power distribution unit shall be controllable via contact closure on the rear of the unit and shall have voltage protection with automatic recovery. Rackmount power distribution unit shall be manufactured by an ISO 9001 and ISO 14001 registered company.

Rackmount power distribution unit shall be warrantied to be free from defects in materials and workmanship under normal use and conditions for a period of 3 years (multi-stage MOV surge models) and 12 years (Series Surge models). Rackmount power distribution unit shall be UL Listed to UL 62368, UL 1449, UL 1283 (Series Surge models) and FCC Class B and ICES 7.





NEXSYS™ Rackmount PDU

Basic Dimensions

MODEL NUMBER	OUTLETS	RATINGS	SURGE PROTECTION	INLET	CORD LENGTH FT [M]
PDX-915R	6	12A, 120VAC~,60Hz	MULTI-STAGE MOV	IEC C14	10 [3]
PDX-920R	ō	16A, 120VAC~,60Hz	MULTI-STAGE MOV	IEC C20	10 [3]
PDX-915R-SP	6	12A, 120VAC~,60Hz	SERIES	IEC C14	10 [3]
PDX-920R-SP	O	16A, 120VAC~,60Hz	SERIES	IEC C20	10 [3]
PDK-815R ("SHOWN) 19.0 [483] SIDE ILLUMINATED LED		CIRCUIT BREAKER RESET— IEC RETAINING CLIP— IEC INLET INLET INL	INPUT REMOTE BUTTON SURGE PROTECTION LED SURGE PROTECTION LED	TTON REAR OUTLETS GROUNDING STUD-	OUTS &



Multi-Stage MOV Surge Models

Electrical Specifications

Summary

Model	PDX-915R	PDX-920R
Nominal Voltage	120\	/AC
Voltage Range	Minimum: 80VAC,	Maximum: 140VAC
Frequency	60	Hz
Maximum Peak Load	15A	20A
Rated Load	12A	16A
Number of Outlets	9)
Outlet Type	NEMA 5-15R	NEMA 5-20R
Overload Protection	Circuit	Breaker
Outlet Control	Contact	Closure
No Load Power Dissipation	<1	W
Input Power Cord	SignalSAFE IEC to 5-15P, 10' (3M)	SignalSAFE IEC to 5-20P, 10' (3M)
Certifications	UL 62368, UL 1449,	FCC Class B, ICES 7

Hardware Features

Model	PDX-915R and PDX-920R
Surge Protection	Multi-Stage MOV
Peak Impulse Current (8/20µS Waveform)	45,000 Amps, one time - Maximum peak impulse current pulse as defined between line and neutral. 19,500 Amps, two times within 5 minutes - Maximum multiple impulse current derated per spec.
Protection Mode	Line to Neutral only; no ground contamination.
Response Time	Less than 1 nanosecond.
Surge Energy Dissipation	705 Joules (10/100μS)
Voltage Protection Rating	500V (L-N); Type 3 SPD
EMI/RF Suppression	>20dB Calculated Line to Neutral - 100kHz to 1Mhz - based on nominal impedance.
Overvoltage Threshold	Upper Limit Cutoff: 135V RMS Upper Limit Restore: 126V RMS
Undervoltage Threshold	Lower Limit Cutoff: 100V RMS Lower Limit Restore: 105V RMS



Multi-Stage MOV Surge Models

Electrical Specifications

Physical

Model	PDX-915R	PDX-920R
Dimensions (Width x Height x Depth)	19" (483mm) x 1.735" (4	4mm) x 8.75" (222mm)
Product Weight	6.84 lbs	(3.1 kg)
Shipping Weight	9.92 lb (4.5 kg)	10.58 lb (4.8 kg)

Warranty

Model	PDX-915R and PDX-920R
Power Distribution	Three years limited for warranty information, refer to www.legranday.com/policies/warranty_information



Series Surge Protection Models

Electrical Specifications

Summary

Model	PDX-915R-SP	PDX-920R-SP
Nominal Voltage	120\	VAC
Voltage Range	Minimum: 80VAC,	Maximum: 140VAC
Frequency	60	Hz
Maximum Peak Load	15A	20A
Rated Load	12A	16A
Number of Outlets	Ç)
Outlet Type	NEMA 5-15R	NEMA 5-20R
Overload Protection	Circuit	Breaker
Outlet Control	Contact	Closure
No Load Power Dissipation	<1	W
Input Power Cord	SignalSAFE IEC to 5-15P, 10' (3M)	SignalSAFE IEC to 5-20P, 10' (3M)
Certifications	UL 62368, UL 1283, UL 14	449, FCC Class B, ICES 7

Hardware Features

Model	PDX-915R-SP	PDX-920R-SP
Surge Protection	Ser	ies
Voltage Protection Rating	330V (L-N);	Type 3 SPD
Maximum Applied Surge Voltage	6000 Volts (1.2 x 50µS Pulse, Industry Star	ndard Combination Wave Per IEEEC62.41)
Maximum Applied Surge Current	Unlimited (Due to Inhe	erent Current Limiting)
Maximum Applied Surge Energy	Unlimited (Due to Inhe	erent Current Limiting)
EMI Filter, Differential Mode	40dB@100kHz	50dB@100kHz
50Ω Load	50dB@3MHz	50dB@30MHz
EMI Filter, Common Mode	18dB@100kHz	30dB@100kHz
50Ω Load	50dB@3MHz	50dB@30MHz
Overvoltage Threshold	Upper Limit Cutoff: 135V RMS Upper Limit Restore: 126V RMS	
Undervoltage Threshold	Lower Limit Cutoff: 100V RMS Lower Limit Restore: 105V RMS	



Series Surge Protection Models

Electrical Specifications

Physical

Model	PDX-915R-SP	PDX-920R-SP
Dimensions (Width x Height x Depth)	19" (483mm) x 1.735" (4	4mm) x 8.75" (222mm)
Product Weight	8.6 lb. ((3.9 kg)
Shipping Weight	11.47 lb. (5.2 kg)	12.35 lb. (5.6 kg)

Warranty

Model	PDX-915R-SP and PDX-920R-SP
Series Surge Module	Twelve years limited for warranty information, refer to
	www.legrandav.com/policies/warranty_information



LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

WHAT GREAT SYSTEMS ARE BUILT ON™ | legrandav.com

 $\textbf{USA} \quad 800.266.7225 \quad \text{av.middleatlantic.support@legrand.com} \quad \textbf{CANADA} \quad 888.766.9770 \quad \text{av.middleatlantic.support@legrand.com} \quad \textbf{CANADA} \quad 888.766.9770 \quad \text{av.middleatlantic.support.} \quad \textbf{CANADA} \quad 888.766.9770 \quad \textbf{Av.middleatlantic.support.} \quad \textbf{CANADA} \quad \textbf$

©2023 Legrand AV Inc. 230488 120-00042 Rev A 7/23 Middle Atlantic is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.



AcousticDesign™ Series AD-C4T-ZB

KEY FEATURES

- Zero bezel design for the needs of modern applications
- Consistent tonal characteristics across the entire AcousticDesign Series for surface, ceiling, and pendant applications
- DMT (Directivity Matched TransitionTM)
 waveguide ensures smooth, uniform frequency
 response over the coverage area
- Snap-fit magnetic grille
- 3x double stepped, long travel dog-ear blind mount system
- Intrinsic Correction[™] voicings available via the Q-SYS Platform including CX-Q amplifiers
- Blemish-free removable logo
- Removable conduit cover plate, also available as accessory for pre-install wiring
- UL1480 and UL2043 certified
- Available in white (RAL 9003)
- Complete EASE, CF2, CAD, & BIM information available online



AcousticDesign™ Series AD-C4T-ZB

4.5" small format, zero bezel ceiling mount loudspeaker

The Q-SYS AcousticDesign™ AD-C4T-ZB is a 4.5″ two-way, zero bezel ceiling loudspeaker ideally suited for a wide variety of foreground and background sound reinforcement applications which utilize 70/100V or 16Ω bypass configurations.

The AcousticDesign™ Series offers integrators a premium quality installed sound solution where performance, consistent coverage, and aesthetics are paramount. Specifically designed to maintain a consistent tonal characteristic across the entire family in ceiling, surface, and pendant applications, the AcousticDesign Series allows integrators seamless transitions within blended installations.

The AD-C4T-ZB features a high quality 4.5" weather treated paper cone woofer with a 1" voice coil and a .75" aluminum dome tweeter which is positioned on a DMT waveguide.

DMT (Directivity Matched Transition™) is Q-SYS's design philosophy where the high frequency waveguide is matched to the natural conical behavior of the woofer at the crossover point. The result is a coherent transition between transducers with improved off-axis power response for consistent 150° conical DMT coverage.

The accurate frequency response of the AD-C4T-ZB is maintained even in 70/100V applications by use of a low-loss, low-saturation 30-watt transformer with selectable taps, including 16Ω bypass, using a rotary selector located under the snap-fit magnetically attached powder coat steel grille.

To retain lasting good looks, the rugged ABS baffle is further protected by using UV inhibitors that prevent discoloration and by a powder coated steel back can. The magnetic grille features a stick-on logo that can be removed blemish-free for installations where branding is not permitted.

Installers will appreciate the 3x double stepped, long travel dog-ear blind mounting system, which captures from 0" - 2.25" of ceiling thickness. The conduit cover plate can be easily removed by losening the single captive Phillips screw allowing access to the locking 4-pole Euro-block connector which can accept up to four 18AWG pairs, eliminating the hassles of star topology wiring designs.

Intrinsic Correction™ voicings that optimize performance and speed the install process are easily deployed via the Q-SYS Platform including CX-Q Series amplifiers.

The AD-C4T-ZB is available in white (RAL 9003) and may be painted to match any decor.

For your system integration needs, complete EASE, CF2, CAD, and BIM files are available for download at Q-SYS.com.



AD-C4T-ZB

LF transducer	110 mm (4.5 in) weather treated paper cone woofer
HF transducer	19 mm (.75 in) aluminum dome tweeter
Effective frequency range 1, 2, 3, 8	70 Hz – 20 kHz
Rated noise power / voltage 6	30 W / 22 V (rms)
Sensitivity (dB)	Rated @1W, 1 m ^{2,3,4,8} : 87
Coverage (-6 dB) (°)	Rated ^{2, 5, 8} : 150 conical DMT
Horizontal / Vertical 9	500Hz: 176 / 176, 1kHz: 160 / 160
	2kHz: 156 / 152, 4kHz: 103 / 111
Declared values of SPL, 1/3rd octave band CPB, 1W, 4m (Hz:dB)°	500: 59.1; 630: 59.4; 800: 60.0; 1000: 60.0 1250: 61.0; 1600: 60.5; 2000: 62.3; 2500: 61.0 3150: 58.0; 4000: 62.2
Directivity factor ^{2, 5, 8}	4.5
Directivity index (dB) ^{2, 5, 8}	6.5
Maximum SPL (dB)	Rated, 1m (continuous / peak) 7: 102 / 108
Recommended amplifier	60 watts
Transformer taps / impedance	Bypass: 16 Ω 3.75 W (70 V); 7.5 W (100 V) Tap: 1333 Ω 7.5 W (70 V); 15 W (100 V) Tap: 667 Ω 15 W (70 V); 30 W (100 V) Tap: 333 Ω 30 W (70 V); N/A (100 V) Tap: 167 Ω
Input connector type	Euroblock connector with parallel output
Enclosure material	ABS baffle on powder coated steel back can
Grille material	Powder coated steel
Ingress protection	IP-34
Operating environment	Designed for indoor use
Operating temperature range	-20 to 50° C (-4 to 122° F)
Cutout dimension	Ø 195 mm (Ø 7.68 in)
Net weight	2.9 kg (6.4 lb)
Product dimensions (Ø x H)	Ø 230 x 176 mm (Ø 9.06 x 6.94 in)
Shipping weight	9.3 kg (20.5 lb), pair packed
Shipping dimensions (H x W x D)	279 x 711 x 318 mm (11 x 28 x 12.5 in), pair packed
Included accessories	C-ring and tile rails, rail screws, euroblock connector, cut-out template, grille
Optional accessories	AD-MR4 (pre-install mud ring)
Safety Agency	UL1480, UL2043, NFPA90, NFPA70 suitable for use in air handling spaces. Transformer UL registered per UL1876, ROHS, CE compliant. Baffle meets UL94-VO and UL94-5VB flamibility rating; in accordance with IEC60849 / EN60849 systems.

^{1 - 10}dB from rated sensitivity


Full-space, IEC baffle, 4m
Reference axis
200 - 10kHz average
500 - 5kHz average
IEC, 2hrs

⁷ Calculated from rated noise power and sensitivit


⁸ Reference plane is the plane coincident with the loudspeaker baffle plane. Reference axis is the axis perpendicular to the reference plane and passing through the center of the baffle. Vertical plane is the plane intersecting the reference plane at a right angle, including the reference axis and the taps selector knob. Horizontal plane is the plane intersecting the reference plane and the vertical plane at a right angle, including the reference axis.

AD-C4T-ZB


Impedance/Frequency Response:

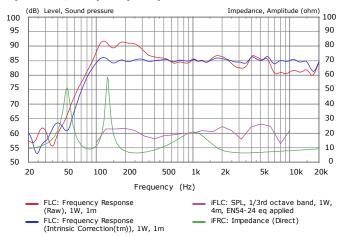

Beamwidth:

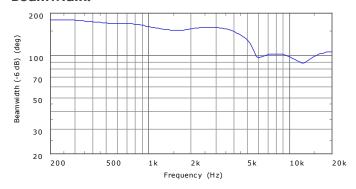

Dimensions

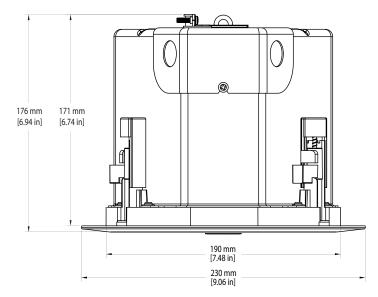

As part of Q-SYS's ongoing commitment to product development, specifications are subject to change without notice.



Agenda Item 9.(e) Approval of Quote Awards to multiple vendors for the I...

PART NUMBER 18-02P-WHT

UL Listed and Rated Type CMP Multi-Conductor Non-Shielded Plenum Cable

■ 0275/0725 FT •

SMARTWIRE(TM)

DEVICE/ZONE

ABCDE0123456789





CABLE SPECIFICATIONS

DESCRIPTION 18 AWG 2 Conductor Bare Copper, Non-Shielded Plenum, UL Listed C(UL)US CMP

CONDUCTOR 18 (7/26 Bare Copper)

INSULATION Low-Smoke PVC .008"

COLOR CODE Black/Red

SHIELD N/A

DRAIN WIRE N/A

JACKET Low-Smoke PVC .018"

JACKET COLOR White Jacket

MARKING SMARTWIRE DEVICE / ZONE A B C D E 0 1 2 3 4 5 6 7 8 9 18 AWG C(UL)US CMP ROHS

MADE IN THE USA

OVERALL DIAMETER .158" Nom.

CABLE WEIGHT 16 Lbs/Mft.

CAPACITANCE 27 pF/Ft. Nom.

IMPEDANCE 70 Ohms

DC RESISTANCE 6.66 Ohms/Mft. maximum @ 20 C

TEMPERATURE RATING 0 C to 75 C / 300 Volt

INDUSTRY STANDARDS

FLAME RATING Approved For Plenum Use Without Conduit Per NFPA 262 Flame Test

AGENCY APPROVALS NEC Article 800; UL Listed C(UL)US CMP, RoHS Compliant, Made in the USA







All specifications referenced are nominal measurements unless otherwise noted.





U Series/U317/UTR1 Rackshelves

GREENGUARD

EIA/TIA Compliant

EXCEPTIONAL SUPPORT & PROTECTION™

U Series / U317 / UTR1 Rackshelves

Features

U Series - Universal rackshelves with solid and vented construction


- Available in 1 through 4 rackspaces
- Weight capacity from 35 to 85 lbs. depending on size
- Accommodates most standard non-rackmountable components
- See chart for part numbers and dimensions
- Contractor packs available

U317 - Vented 3 space rackshelf

- 17-3/4" depth allows for deeper components
- 60 lb. weight capacity
- Vent pattern provides air circulation
- Slotted rear flange for cable management

UTR1 - Half / third rack shelf

- 25 lb. weight capacity
- Generous vent pattern provides superior air circulation
- Hook & loop strips included for mounting any half or third space components without hardware
- Contractor packs available

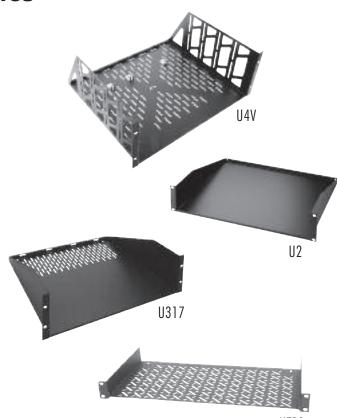

UTR'

Architects' and Engineers' Specifications

U Serie

EIA/TIA compliant 19" solid, one-piece 16-gauge steel rackshelf shall be Middle Atlantic Products model #Ux (x =#of rackspaces, refer to chart). Weight capacity shall be __(refer to chart). Rackshelf shall feature durable flat black powder coat finish. Contractor packs shall be available with twelve U1 or six U2 rackshelves and shall be model #U1-RP12 or U2-RP6. U series rackshelf shall be UL Listed in the US and Canada. U Series shall be GREENGUARD Indoor Air Quality Certified for Children and Schools. U series shall be manufactured by an ISO 9001 and ISO 14001 registered company. U series rackshelf shall be warrantied to be free from defects in material or workmanship under normal use and conditions for the lifetime of the product.

U Series, Vented

EIA/TIA compliant 19" solid, one-piece 16-gauge steel rackshelf shall be Middle Atlantic Products model #UxV (x #f rackspaces, refer to chart) and shall have a ventilated bottom and sides. Weight capacity shall be __(refer to chart). Rackshelf shall feature durable flat black powder coat finish. Vented U series rackshelf shall be GREENGUARD Indoor Air Quality Certified for Children and Schools. Vented U series rackshelf shall be manufactured by an ISO 9001 and ISO 14001 registered company. Vented U series rackshelf shall be warrantied to be free from defects in material or workmanship under normal use and conditions for the lifetime of the product.

U317


EIA/TIA compliant 19" vented three rackspace rackshelf shall be Middle Atlantic Products model #U317. One-piece, 16-gauge rackshelf shall provide a 60 lb. weight capacity. U317 shall features slotted rear flange for cable management. Depth of 17-3/4" shall accommodate deeper components. U317 shall be GREENGUARD Indoor Air Quality Certified for Children and Schools. U317 shall be manufactured by an ISO 9001 and ISO 14001 registered company. U317 shall be warrantied to be free from defects in material or workmanship under normal use and conditions for the lifetime of the product.

UTR1

EIA/TIA compliant 19" half / third rack shelf with 10" depth shall be Middle Atlantic Products model #UTR1. Weight capacity shall be 25 lbs. UTR1 shall include two 2" x 10" hook & loop strips for component mounting and a generous vent pattern for superior air circulation.

Contractor packs shall be available with twelve UTR1 rackshelves and shall be model #UTR1-RP12. UTR1 shall be GREENGUARD Indoor Air Quality Certified for Children and Schools. UTR1 shall be manufactured by an ISO 9001 and ISO 14001 registered company. UTR1 shall be warrantied to be free from defects in material or workmanship under normal use and conditions for the lifetime of the product.

U Series/Vented U Series/U317/UTR1 basic dimensions All dimensions in inches unless otherwise noted [Bracketed dimensions in millimeters]

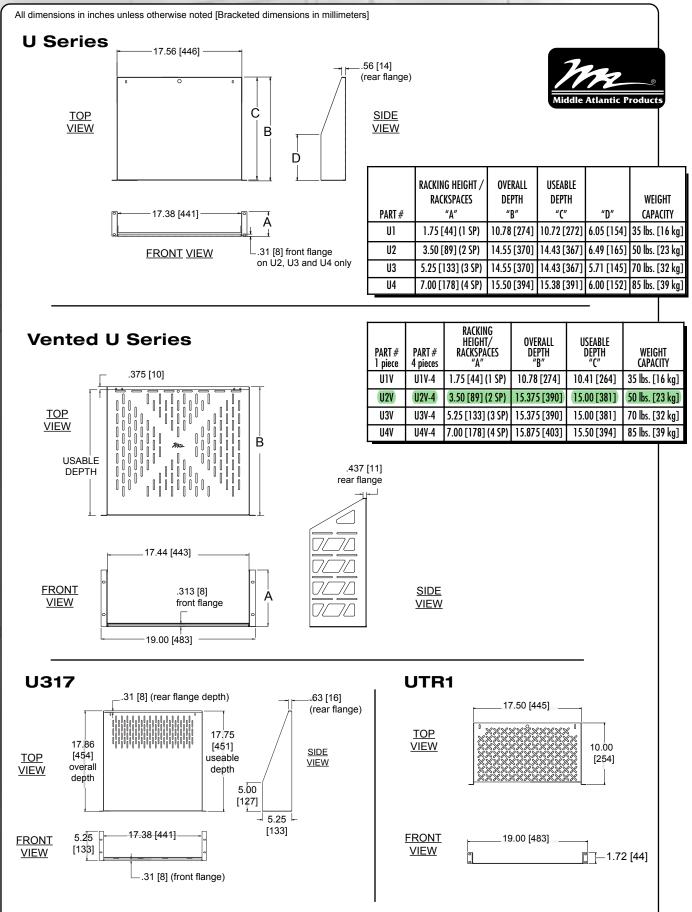


		86UR640S9UD	75UR640S9UD	65UR640S9UD	55UR640S9UD	50UR640S9UD	43UR640S9UD
	Size	86"	75"	65"	55"	50"	43"
	Resolution	3840 X 2160 (UHD)					
	Backlight Unit Type	Direct	Direct	Direct	Direct	Direct	Direct
	Brightness	330 nits	330 nits	400 nits	400 nits	400 nits	300 nits
AUDIO BROADCASTING	Dynamic Contrast Ratio (Dynamic MCI (Hz))	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1
DISPLAY	Static (Panel) Contrast Ratio	1200:1	1200:1	1200:1	1300:1	5,000:1	1200:1
	Response Time (G to G)	5 ms	8 ms	8 ms	14 ms	19 ms	8 ms
	Refresh Rate	120 Hz	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
	Life Span	30,000 hrs					
	HDR_HDR 10 Pro	Yes	Yes	Yes	Yes	Yes	Yes
	HDR_HLG	Yes	Yes	Yes	Yes	Yes	Yes
	Built-in Speakers	2.0 channel, 10W + 10W	2.0 channel, 10W + 10W	2.0 channel. 10W + 10W	2.0 channel, 10W + 10W	2.0 channel, 10W + 10W	2.0 channel, 10W + 10W
AUDIO	LG Sound Sync	Yes (Bluetooth Required)					
BROADCASTING	Broadcasting System	ATSC, Clear QAM, Analog NTSC					
51.07.567.571110	Global IPTV Support	Yes	Yes	Yes	Yes	Yes	Yes
	Smart Home						
	(Launcher Bar)	Yes	Yes	Yes	Yes	Yes	Yes
	Quick Access Web Browser	Yes Yes	Yes Yes	Yes Yes	Yes Yes	Yes Yes	Yes Yes
	Pre-loaded App	YouTube	YouTube	YouTube	YouTube	YouTube	YouTube
	SDP Server compatibility	Yes	Yes	Yes	Yes	Yes	Yes
	SW Clock (World Clock / Alarm)	Yes	Yes	Yes	Yes	Yes	Yes
CMADT	Mood Display	Yes	Yes	Yes	Yes	Yes	Yes
FEATURES	SoftAP	Yes	Yes	Yes	Yes	Yes	Yes
	Wi-Fi	802.11ac	802.11ac	802.11ac	802.11ac	802.11ac	802.11ac
	Screen Share (Miracast)	Yes	Yes	Yes	Yes	Yes	Yes
	Smart Share	Yes	Yes	Yes	Yes	Yes	Yes
	LG ThinQ App	Yes	Yes	Yes	Yes	Yes	Yes
	DIAL	Yes	Yes	Yes	Yes	Yes	Yes
	Bluetooth Audio Playback	Yes	Yes	Yes	Yes	Yes	Yes
	Mobile Connection Overlay	Yes	Yes	Yes	Yes	Yes	Yes
	HDMI-ARC	ARC, HDMI2					
	USB Cloning	Yes	Yes	Yes	Yes	Yes	Yes
	WOL	Yes	Yes	Yes	Yes	Yes	Yes
	SNMP	Yes	Yes	Yes	Yes	Yes	Yes
	Self Diagnostics (USB)	Yes	Yes	Yes	Yes	Yes	Yes
	SI Compatible Protocol	TVLink Tuner					
	HTNG-CEC	Yes	Yes	Yes	Yes	Yes	Yes
	Simplink (HDMI-CEC)	1.4	1.4	1.4	1.4	1.4	1.4
	IR Out	RS-232C	RS-232C	RS-232C	RS-232C	RS-232C	RS-232C
	Multi-code IR Hotel Mode / PDM /	Yes	Yes	Yes	Yes	Yes	Yes
	Installer Menu	Yes	Yes	Yes	Yes	Yes	Yes
	Lock mode	Yes (Limited)					
	Port Block	Yes	Yes	Yes	Yes	Yes	Yes
	Welcome Screen (Splash Image)	Yes	Yes	Yes	Yes	Yes	Yes
	Insert Image	Yes	Yes	Yes	Yes	Yes	Yes
OTHER FEATURES	IP Channel Manager	Yes	Yes	Yes	Yes	Yes	Yes
FEATURES	External Speaker Out	Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), $2W$ with 8Ω	Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), $2W$ with 8Ω	Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), $2W$ with 8Ω	Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), $2W$ with 8Ω	Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), $2W$ with 8Ω	Int / Fixed, 3.5mm, Stereo, Single ended Type GND,L+, R+), $2W$ with 8Ω
	RJP (remote jack pack) Compatibility	Teleadapt/Guestlink (HDMI CEC)	Teleadapt/Guestlink (HDMI CEC)				
	Moving Picture Playback (SD/HD/Plus HD)	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Off / Sleep Timer	Yes / Yes					
	Energy Saving mode	Yes	Yes	Yes	Yes	Yes	Yes
	Motion Eye Care	Yes	Yes	Yes	Yes	Yes	Yes
	Crestron Certi. Compatibility	Yes	Yes	Yes	Yes	Yes	Yes
	DPM (Digital Power Management)	Yes	Yes	Yes	Yes	Yes	Yes
	Time scheduler	Yes	Yes	Yes	Yes	Yes	Yes
	DTC (Darl Time Clasts)	Vas	V	V	Yes	V	V
	RTC (Real Time Clock)	Yes	Yes	Yes	res	Yes	Yes


		86UR640S9UD	75UR640S9UD	65UR640S9UD	55UR640S9UD	50UR640S9UD	43UR640S9UD
	BEACON	Yes	Yes	Yes	Yes	Yes	Yes
	Embedded CM (Contents Manager)	Yes	Yes	Yes	Yes	Yes	Yes
OTHER	Embedded GM (Group Manager)	Yes	Yes	Yes	Yes	Yes	Yes
FEATURES	Promota / Mobile CMS	Yes / Yes					
	SuperSign Control / Control Plus	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes
	SuperSign CMS(Premium)	Yes	Yes	Yes	Yes	Yes	Yes
	Simple Editor	Yes	Yes	Yes	Yes	Yes	Yes
	HDMIIn	3 (v2.0)					
	RS-232C	3.5mm Stereo Jack					
	Service Only	3.5mm Stereo Jack					
	USB 2.0	1	1	1	1	1	1
INTERFACES	RF In	1	1	1	1	1	1
	Optical Digital Audio Out	1	1	1	1	1	1
	Line Out	3.5mm Stereo Jack					
	RJ45 (LAN)	1	1	1	1	1	1
	Stand Type	86/75/65/55/50": 20Y 2Pole 43" : 18Y 2Pole	86/75/65/55/50": 20Y 2Pole 43": 18Y 2Pole	86/75/65/55/50": 20Y 2Pole 43" : 18Y 2Pole	86/75/65/55/50": 20Y 2Pole 43" : 18Y 2Pole	86/75/65/55/50": 20Y 2Pole 43": 18Y 2Pole	86/75/65/55/50": 20Y 2Pole 43" : 18Y 2Pole
	Front Color	Blue	Blue	Blue	Blue	Blue	Blue
	VESA Compatible	600 x 400	400 x 400	300 x 300	300 x 300	200 x 200	200 x 200
	Kensington Lock	Yes	Yes	Yes	Yes	Yes	Yes
	Weight without Stand	99.6 lbs / 45.2 kg	69.2 lbs / 31.4 kg	47.4 lbs / 21.5 kg	30.9 lbs / 14.0 kg	25.8 lbs / 11.7 kg	19.4 lbs / 8.8 kg
	Weight with Stand	101.2 lbs / 45.9 kg	70.8 lbs / 32.1 kg	48.1 lbs / 21.8 kg	31.3 lbs / 14.2 kg	26.2 lbs / 11.9 kg	19.6 lbs / 8.9 kg
	Shipping Weight	128.8 lbs / 58.4 kg	91.5 lbs / 41.5 kg	61.3 lbs / 27.8 kg	41.9 lbs / 19.0 kg	32.2 lbs / 14.6 kg	24.5 lbs / 11.0 kg
MECHANICAL	Dimensions without Stand	75.9 x 43.5 x 2.4 in 1927 x 1104 x 59.9 mm	66.1 x 38.0 x 2.4 in 1678 x 964 x 59.9 mm	57.2 x 33.0 x 2.3 in 1454 x 838 x 57.7 mm	48.6 x 28.1 x 2.3 in 1235 x 715 x 57.5 mm	44.1 x 25.6 x 2.2 in 1121 x 651 x 57.1 mm	38.1 x 22.2 x 2.2 in 967 x 564 x 57.1 mm
	Dimensions with Stand	75.9 x 45.9 x 14.3 in 1927 x 1167 x 362 mm	66.1 x 40.4 x 14.3 in 1678 x 1027 x 362 mm	57.2 x 35.4 x 10.7 in 1454 x 899 x 271 mm	48.6 x 30.4 x 9.1 in 1235 x 772 x 232 mm	44.1 x 27.9 x 9.1 in 1121 x 708 x 232 mm	38.1 x 24.5 x 8.5 in 967 x 622 x 216 mm
	Dimensions in Shipping	83.3 x 47.8 x 9.0 in 2115 x 1215 x 228 mm	74.0 x 43.9 x 7.9 in 1880 x 1115 x 200 mm	63.0 x 38.2 x 6.8 in 1600 x 970 x 172 mm	53.5 x 31.9 x 6.4 in 1360 x 810 x 162 mm	47.8 x 30.5 x 6.0 in 1215 x 775 x 152 mm	41.5 x 26.0 x 5.6 in 1055 x 660 x 142 mm
	Bezel Width (L/R/U/B): On Bezel	15.9 / 15.9 / 15.9 / 19.9 mm	13.9 / 13.9 / 13.9 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm
	Bezel Width (L/R/U/B): Off Bezel	6.9 / 6.9 / 6.9 / 18.4 mm	7.9 / 7.9 / 7.9 / 18.4 mm	6.8 / 6.8 / 6.8 / 18.4 mm	6.9 / 6.9 / 6.9 / 18.4 mm	7.3 / 7.3 / 7.8 / 18.4 mm	6.9 / 6.9 / 6.9 / 18.4 mm
	Power Supply (Voltage, Hz)	120 Vac, 50/60 Hz					
POWER	Power Consumption (Max)	339 W	228 W	198 W	166.3 W	144.8 W	119.1 W
	Power Consumption (Typ)	313 W	202 W	169 W	140.1 W	118.8 W	97.7 W
	Standby Power Consumption	Less than 0.5W					
	Standards	UL	UL	UL	UL	UL	UL
	EMC Certification	FCC	FCC	FCC	FCC	FCC	FCC
WARRANTY &	Environmental	EPEAT, ISTA6					
OTHER	Accessories	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory





f https://www.facebook.com/LGcommercialdisplays


in https://www.linkedin.com/company/lg-commercial-displays-usa

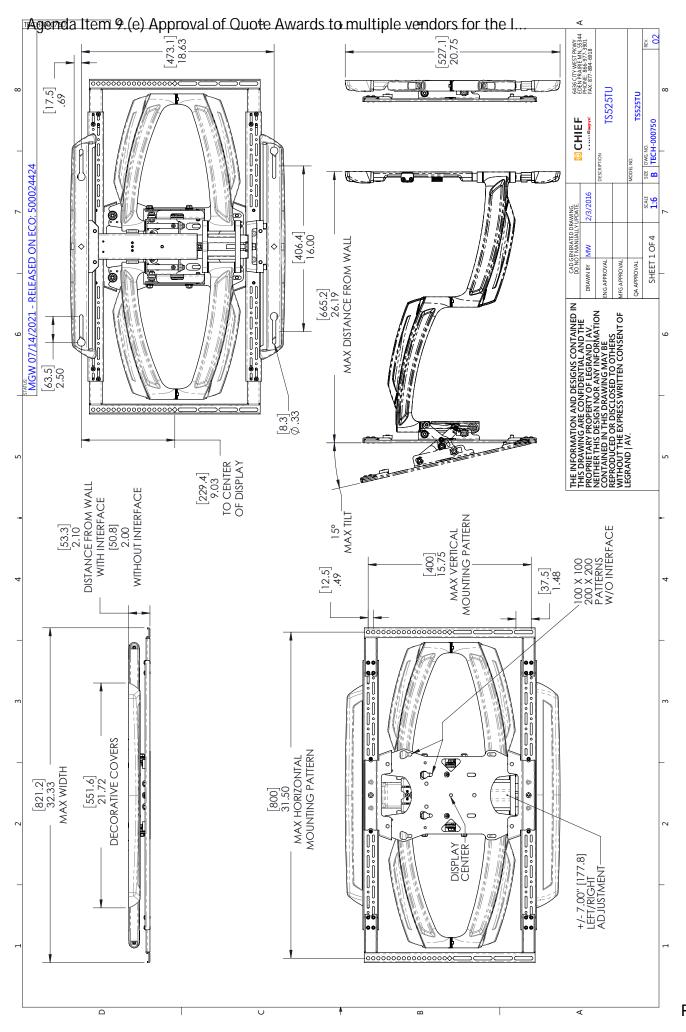

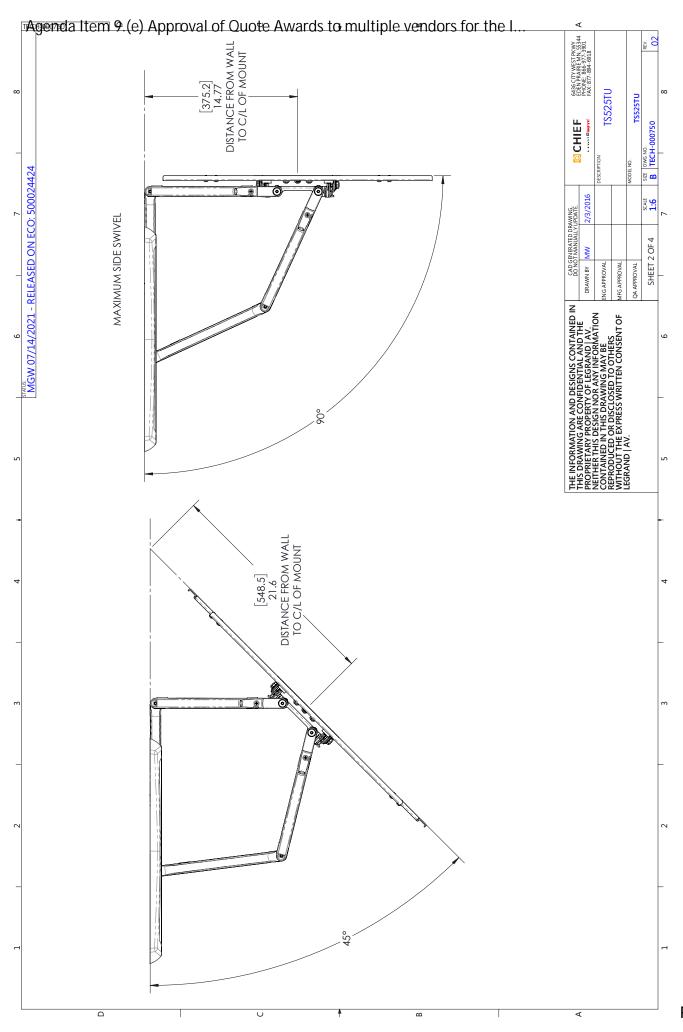

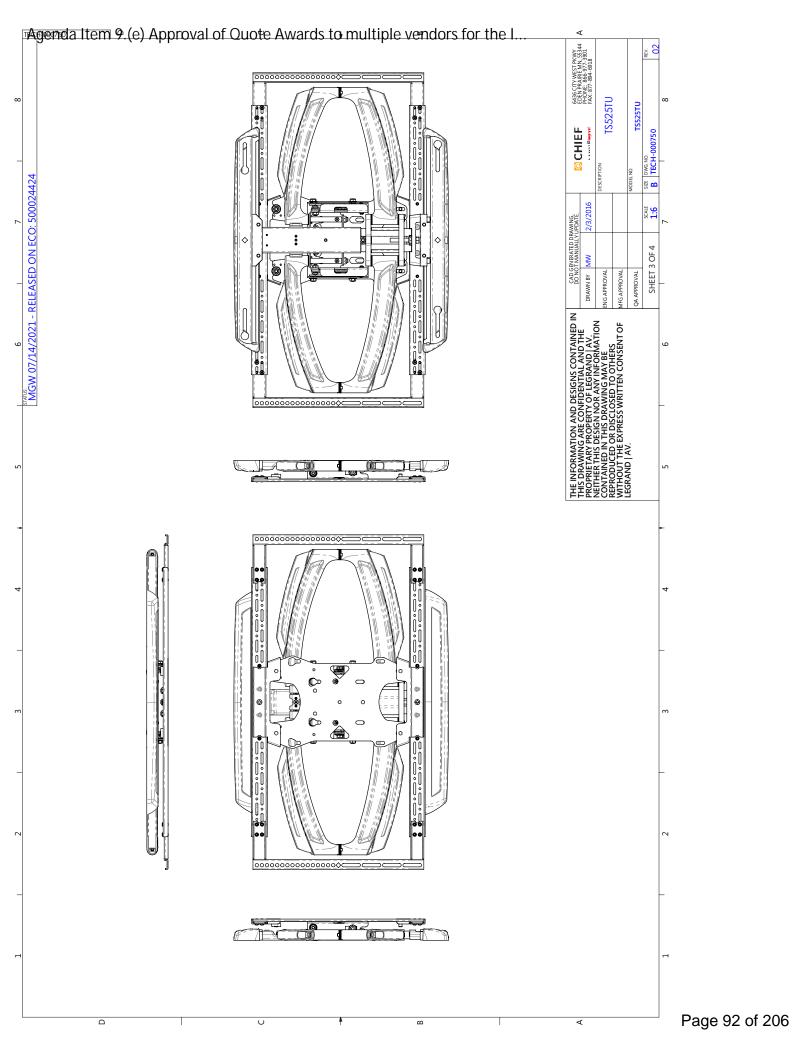

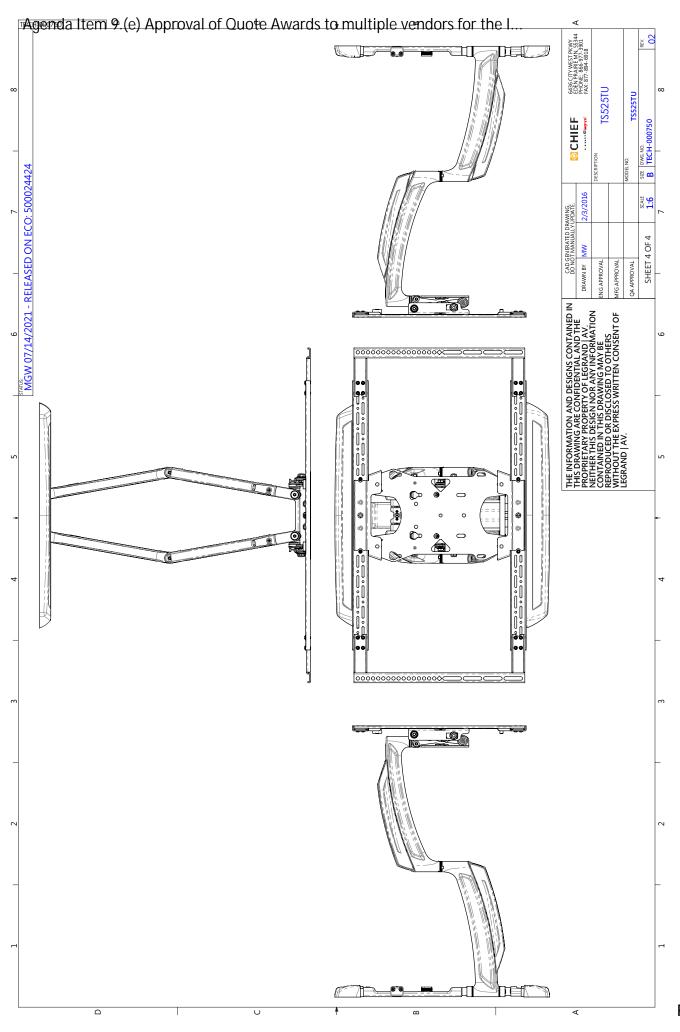

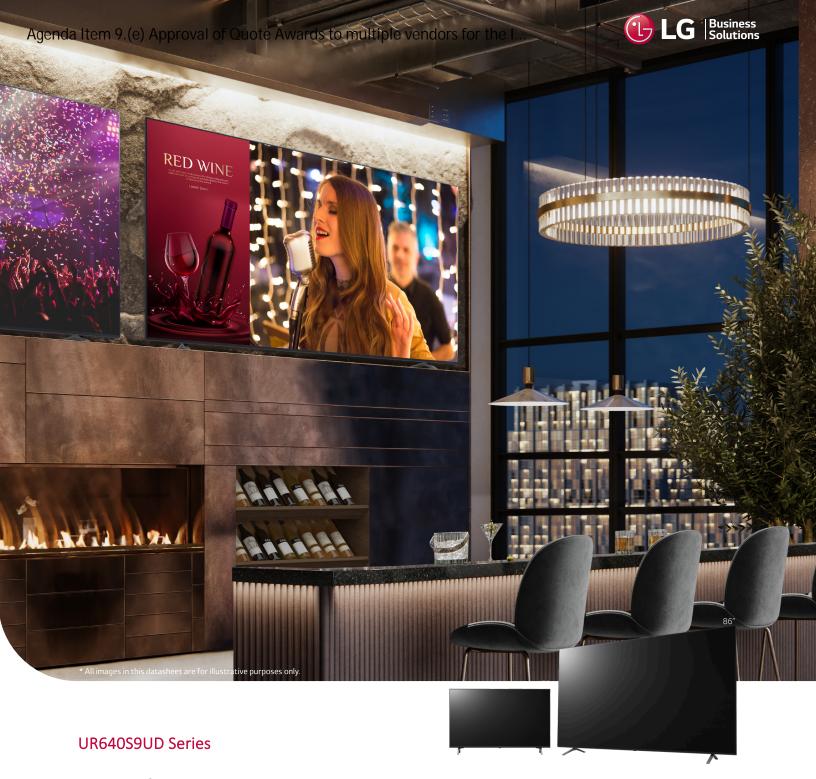

LG Ultra HD TV Signage



Superb Picture Quality with Ultra HD Resolution



Attractive Design with Slim Depth



Versatile Content Management with LG SuperSign CMS



Embedded Content & Group Management

UR640S9UD	Series
-----------	--------

UN040390D Series	
Available Sizes	86" / 75" / 65" / 55" / 50" / 43"
Screen Resolution	3,840 × 2,160 (UHD)
Operation Time	16 Hours / 7 Days
Brightness	86" / 75": 330 nits 65" / 55" / 50": 400 nits 43"v: 300 nits
LG Solution Compatibility	Promota App, LG ConnectedCare, LG SuperSign CMS, LG SuperSign Control



SUPERB PICTURE WITH ULTRA HD RESOLUTION

With the resolution that is 4 times higher than Full HD, this model makes the color and details of the contents more vivid and realistic. In addition, the LG IPS panel provides a clear view of the picture contents even at extremely wide viewing angles.



WIRELESS ACCESS POINT


The UR640S9UD series operates as a virtual router which can be an wireless access point for mobile devices.



IMPROVED DESIGN WITH SLIM DEPTH

This series is thinner than LG conventional* models to save space and enable easy installation. In addition, its sophisticated design and color improve the décor of the space where the product is installed.

* 'LG Conventional' refers to LG UT640S series.

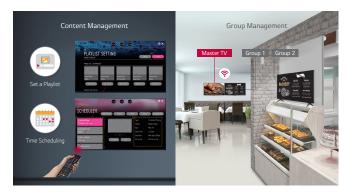

EMBEDDED CONTENT & GROUP MANAGEMENT

The embedded Content and Group Management System allows you to edit and play content, schedule playlists and groups, and control signage via remote control, mouse and mobile phone without the use of separate PC or software.



LG's SIMPLE ADVERTISEMENT HELPER, PROMOTA

Using LG's Promota* mobile application, you can easily create your own display contents. With Promota, you can add text and images to create an online profile for your business as well as deliver information such as event news, seasonal menus, promotions, and even more to your customers while leveraging easy-to-use templates relevant to your industry.


^{*} LG Promota can be downloaded from the App Store and Google Play store.



VERSATILE CONTENT MANAGEMENT WITH LG SuperSign CMS

LG SuperSign CMS* is integrated management program supporting creation and management of digital media and content deployment, optimized for LG signage. With its simple and intuitive menus and layout options, it enhances content creation, editing, scheduling and distribution. In addition, it supports multiple displays and accounts, is able to be linked to external databases, and allows server access from mobile devices.

* LG SuperSign CMS is sold separately.

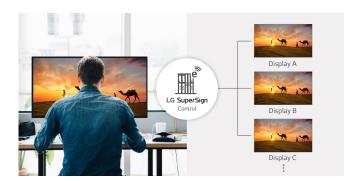

QUICK & EASY SIGNAGE CONTROL WITH LG SuperSign CONTROL

SuperSign Control is basic signage control software, and it can manage up to 100 displays through a single account and server. Power, volume, and scheduling can be remotely adjusted and firmware updates supported.

* LG SuperSign Control is sold separately.



DISPLAY POWER MANAGEMENT SUPPORT

Display Power Management (DPM) can be configured to be On only when there is a TV signal present to manage power more efficiently.



REAL-TIME PROMOTION

With Beacon and Bluetooth® Low Energy (BLE), shop managers can provide coupons and information in real-time.

CONTENT SHARING

Content Mirroring among devices is available on a same Wi-Fi network.



EASY MENU SETUP FOR VERTICAL NEEDS

The UR640S9UD series conveniently organizes frequently used menus* by industry.

* Pre-set support verticals: Corporate / Government / Retail / Meeting Room



REAL-TIME LG ConnectedCare SERVICE

Maintenance is easy and fast with the optional LG ConnectedCare* service, a cloud service solution provided by LG. It remotely manages the status of displays in client workplaces for fault diagnosis and remote-control services, supporting the stable operation of clients' businesses.

* The availability of the 'LG ConnectedCare' service differs by region is sold separately. Contact the LG sales representative in your region for more details.

Rear T5" / 65" / 55" / 50" / 43" Rear Rear LINE OUT LIN Marufactured under kerne from Daby Laborations, Daby Daby Vison, Daby Audio,

^{*} Jack Panels may differ from the above image, so please contact LG sales team to verify before ordering.

		86UR640S9UD	75UR640S9UD	65UR640S9UD	55UR640S9UD	50UR640S9UD	43UR640S9UD
	Size	86"	75"	65"	55"	50"	43"
	Resolution	3840 X 2160 (UHD)	3840 X 2160 (UHD)	3840 X 2160 (UHD)			
	Backlight Unit Type	Direct	Direct	Direct	Direct	Direct	Direct
	Brightness	330 nits	330 nits	400 nits	400 nits	400 nits	300 nits
UDIO ROADCASTING MART EATURES	Dynamic Contrast Ratio (Dynamic MCI (Hz))	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1
DISPLAY	Static (Panel) Contrast Ratio	1200:1	1200:1	1200:1	1300:1	5,000:1	1200:1
	Response Time (G to G)	5 ms	8 ms	8 ms	14 ms	19 ms	8 ms
	Refresh Rate	120 Hz	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
	Life Span	30,000 hrs	30,000 hrs	30,000 hrs	30,000 hrs	30,000 hrs	30,000 hrs
	HDR_HDR 10 Pro	Yes	Yes	Yes	Yes	Yes	Yes
	HDR_HLG	Yes	Yes	Yes	Yes	Yes	Yes
	Built-in Speakers	2.0 channel, 10W + 10W	2.0 channel, 10W + 10W	2.0 channel, 10W + 10W			
AUDIO	LG Sound Sync	Yes (Bluetooth Required)	Yes (Bluetooth Required)	Yes (Bluetooth Required)	Yes (Bluetooth Required)	Yes (Bluetooth Required)	Yes (Bluetooth Required)
BROADCASTING	Broadcasting System	ATSC, Clear QAM, Analog NTSC	ATSC, Clear QAM, Analog NTSC	ATSC, Clear QAM, Analog NTSC			
	Global IPTV Support	Yes	Yes	Yes	Yes	Yes	Yes
	Smart Home	Yes	Yes	Yes	Yes	Yes	Yes
	(Launcher Bar)						
	Quick Access	Yes	Yes	Yes	Yes	Yes	Yes
	Web Browser	Yes	Yes	Yes	Yes	Yes	Yes
	Pre-loaded App	YouTube	YouTube	YouTube	YouTube	YouTube	YouTube
	SDP Server compatibility	Yes	Yes	Yes	Yes	Yes	Yes
	SW Clock (World Clock / Alarm)	Yes	Yes	Yes	Yes	Yes	Yes
SMART	Mood Display	Yes	Yes	Yes	Yes	Yes	Yes
FEATURES	SoftAP	Yes	Yes	Yes	Yes	Yes	Yes
	Wi-Fi	802.11ac	802.11ac	802.11ac	802.11ac	802.11ac	802.11ac
	Screen Share (Miracast)	Yes	Yes	Yes	Yes	Yes	Yes
	Smart Share	Yes	Yes	Yes	Yes	Yes	Yes
	LG ThinQ App	Yes	Yes	Yes	Yes	Yes	Yes
	DIAL	Yes	Yes	Yes	Yes	Yes	Yes
	Bluetooth Audio Playback	Yes	Yes	Yes	Yes	Yes	Yes
	Mobile Connection Overlay	Yes	Yes	Yes	Yes	Yes	Yes
	HDMI-ARC	ARC, HDMI2	ARC, HDMI2	ARC, HDMI2	ARC, HDMI2	ARC, HDMI2	ARC, HDMI2
	USB Cloning	Yes	Yes	Yes	Yes	Yes	Yes
	WOL	Yes	Yes	Yes	Yes	Yes	Yes
	SNMP	Yes	Yes	Yes	Yes	Yes	Yes
	Self Diagnostics (USB)	Yes	Yes	Yes	Yes	Yes	Yes
	SI Compatible Protocol	TVLink Tuner	TVLink Tuner	TVLink Tuner	TVLink Tuner	TVLink Tuner	TVLink Tuner
	HTNG-CEC Simplink (HDMI-CEC)	Yes 1.4	Yes 1.4	Yes 1.4	Yes 1.4	Yes 1.4	Yes 1.4
	IR Out	RS-232C	RS-232C	RS-232C	RS-232C	RS-232C	RS-232C
	Multi-code IR	Yes	Yes	Yes	Yes	Yes	Yes
	Hotel Mode / PDM /	Yes	Yes	Yes	Yes	Yes	Yes
	Installer Menu						
	Lock mode	Yes (Limited)	Yes (Limited)	Yes (Limited)	Yes (Limited)	Yes (Limited)	Yes (Limited)
	Port Block Welcome Screen	Yes	Yes	Yes	Yes	Yes	Yes
		Yes	Yes	Yes	Yes	Yes	Yes
	(Splash Image) Insert Image	Yes Yes	Yes Yes	Yes Yes	Yes Yes	Yes Yes	Yes Yes
	(Splash Image)						
	(Splash Image) Insert Image	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+),	Yes	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+),	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+),	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+),	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type GND,L+,
	(Splash Image) Insert Image IP Channel Manager	Yes Yes Int / Fixed, 3.5mm, Stereo,	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+),	Yes Yes Int / Fixed, 3.5mm, Stereo,	Yes Yes Int / Fixed, 3.5mm, Stereo,	Yes Yes Int / Fixed, 3.5mm, Stereo,	Yes $Yes \\ Int / Fixed, 3.5mm, Stereo, \\ Single ended Type GND,L+, \\ R+), 2W with 8\Omega$
	(Splash Image) Insert Image IP Channel Manager External Speaker Out RJP (remote jack pack)	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type GND,L+, R+), 2W with 8Ω Teleadapt/Guestlink (HDMI
	(Splash Image) Insert Image IP Channel Manager External Speaker Out RJP (remote jack pack) Compatibility Moving Picture Playback	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\Omega Teleadapt/Guestlink (HDMI CEC)	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC)	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC)	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC)	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\Omega Teleadapt/\Guestlink (HDMI CEC)	$\begin{array}{c} \text{Yes} \\ \text{Yes} \\ \\ \text{Int / Fixed, 3.5mm, Stereo,} \\ \text{Single ended Type GND,L+,} \\ \text{R+), 2W with 8} \\ \text{Q} \\ \text{Teleadapt/Guestlink (HDMI CEC)} \\ \end{array}$
	(Splash Image) Insert Image IP Channel Manager External Speaker Out RJP (remote jack pack) Compatibility Moving Picture Playback (SD/HD/Plus HD)	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC)	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type GND,L+, R+), 2W with 8\Omega Teleadapt/Guestlink (HDMI CEC) Yes
	(Splash Image) Insert Image IP Channel Manager External Speaker Out RJP (remote jack pack) Compatibility Moving Picture Playback (SD/HD/Plus HD) Auto Off / Sleep Timer	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\text{Q} Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type GND,L+, R+), 2W with 8\Oldsymbol{\Omega} Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes
	(Splash Image) Insert Image IP Channel Manager External Speaker Out RJP (remote jack pack) Compatibility Moving Picture Playback (SD/HD/Plus HD) Auto Off / Sleep Timer Energy Saving mode Motion Eye Care Crestron Certi.	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes Yes	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\Omega Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes/Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\Omega Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes/Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\Omega Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes /Yes	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\Omega Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes Yes	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type GND,L+, R+), 2W with 8\Omega Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes Yes / Yes
OTHER FEATURES	(Splash Image) Insert Image IP Channel Manager External Speaker Out RJP (remote jack pack) Compatibility Moving Picture Playback (SD/HD/Plus HD) Auto Off / Sleep Timer Energy Saving mode Motion Eye Care Crestron Certi. Compatibility DPM (Digital Power	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND),L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes Yes Yes	Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type GND,L+, R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes Yes Yes
	(Splash Image) Insert Image IP Channel Manager External Speaker Out RJP (remote jack pack) Compatibility Moving Picture Playback (SD/HD/Plus HD) Auto Off / Sleep Timer Energy Saving mode Motion Eye Care Crestron Certi. Compatibility DPM (Digital Power Management)	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\(\Omega\) Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\Omega Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes Yes Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\Omega Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes Yes Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\(\Omega\) Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes Yes Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8\Omega Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes Yes Yes Yes Yes Ye	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type GND,L+, R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes Yes Yes Yes Yes
	(Splash Image) Insert Image IP Channel Manager External Speaker Out RJP (remote jack pack) Compatibility Moving Picture Playback (SD/HD/Plus HD) Auto Off / Sleep Timer Energy Saving mode Motion Eye Care Crestron Certi. Compatibility DPM (Digital Power	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GNDL+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes/Yes Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(GND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes Yes Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type(CND,L+,R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes Yes Yes Yes Yes Yes	Yes Yes Yes Int / Fixed, 3.5mm, Stereo, Single ended Type GND,L+, R+), 2W with 8Ω Teleadapt/Guestlink (HDMI CEC) Yes Yes / Yes Yes Yes Yes

		86UR640S9UD	75UR640S9UD	65UR640S9UD	55UR640S9UD	50UR640S9UD	43UR640S9UD
	BEACON	Yes	Yes	Yes	Yes	Yes	Yes
	Embedded CM (Contents Manager)	Yes	Yes	Yes	Yes	Yes	Yes
OTHER	Embedded GM (Group Manager)	Yes	Yes	Yes	Yes	Yes	Yes
FEATURES	Promota / Mobile CMS	Yes / Yes					
	SuperSign Control / Control Plus	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes
	SuperSign CMS(Premium)	Yes	Yes	Yes	Yes	Yes	Yes
	Simple Editor	Yes	Yes	Yes	Yes	Yes	Yes
	HDMI In	3 (v2.0)					
	RS-232C	3.5mm Stereo Jack					
	Service Only	3.5mm Stereo Jack					
	USB 2.0	1	1	1	1	1	1
INTERFACES	RF In	1	1	1	1	1	1
	Optical Digital Audio Out	1	1	1	1	1	1
	Line Out	3.5mm Stereo Jack					
	RJ45 (LAN)	1	1	1	1	1	1
	Stand Type	86/75/65/55/50": 20Y 2Pole 43" : 18Y 2Pole	86/75/65/55/50": 20Y 2Pole 43": 18Y 2Pole	86/75/65/55/50": 20Y 2Pole 43" : 18Y 2Pole			
	Front Color	Blue	Blue	Blue	Blue	Blue	Blue
	VESA Compatible	600 x 400	400 x 400	300 x 300	300 x 300	200 x 200	200 x 200
	Kensington Lock	Yes	Yes	Yes	Yes	Yes	Yes
	Weight without Stand	99.6 lbs / 45.2 kg	69.2 lbs / 31.4 kg	47.4 lbs / 21.5 kg	30.9 lbs / 14.0 kg	25.8 lbs / 11.7 kg	19.4 lbs / 8.8 kg
	Weight with Stand	101.2 lbs / 45.9 kg	70.8 lbs / 32.1 kg	48.1 lbs / 21.8 kg	31.3 lbs / 14.2 kg	26.2 lbs / 11.9 kg	19.6 lbs / 8.9 kg
	Shipping Weight	128.8 lbs / 58.4 kg	91.5 lbs / 41.5 kg	61.3 lbs / 27.8 kg	41.9 lbs / 19.0 kg	32.2 lbs / 14.6 kg	24.5 lbs / 11.0 kg
MECHANICAL	Dimensions without Stand	75.0 v 42.5 v 2.4 in	66.1 x 38.0 x 2.4 in 1678 x 964 x 59.9 mm	57.2 x 33.0 x 2.3 in 1454 x 838 x 57.7 mm	48.6 x 28.1 x 2.3 in 1235 x 715 x 57.5 mm	44.1 x 25.6 x 2.2 in 1121 x 651 x 57.1 mm	38.1 x 22.2 x 2.2 in 967 x 564 x 57.1 mm
	Dimensions with Stand	75.9 x 45.9 x 14.3 in 1927 x 1167 x 362 mm	66.1 x 40.4 x 14.3 in 1678 x 1027 x 362 mm	57.2 x 35.4 x 10.7 in 1454 x 899 x 271 mm	48.6 x 30.4 x 9.1 in 1235 x 772 x 232 mm	44.1 x 27.9 x 9.1 in 1121 x 708 x 232 mm	38.1 x 24.5 x 8.5 in 967 x 622 x 216 mm
	Dimensions in Shipping	83.3 x 47.8 x 9.0 in 2115 x 1215 x 228 mm	74.0 x 43.9 x 7.9 in 1880 x 1115 x 200 mm	63.0 x 38.2 x 6.8 in 1600 x 970 x 172 mm	53.5 x 31.9 x 6.4 in 1360 x 810 x 162 mm	47.8 x 30.5 x 6.0 in 1215 x 775 x 152 mm	41.5 x 26.0 x 5.6 in 1055 x 660 x 142 mm
	Bezel Width (L/R/U/B): On Bezel	15.9 / 15.9 / 15.9 / 19.9 mm	13.9 / 13.9 / 13.9 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm
	Bezel Width (L/R/U/B): Off Bezel	6.9 / 6.9 / 6.9 / 18.4 mm	7.9 / 7.9 / 7.9 / 18.4 mm	6.8 / 6.8 / 6.8 / 18.4 mm	6.9 / 6.9 / 6.9 / 18.4 mm	7.3 / 7.3 / 7.8 / 18.4 mm	6.9 / 6.9 / 6.9 / 18.4 mm
	Power Supply (Voltage, Hz)	120 Vac, 50/60 Hz					
POWER	Power Consumption (Max)	339 W	228 W	198 W	166.3 W	144.8 W	119.1 W
	Power Consumption (Typ)	313 W	202 W	169 W	140.1 W	118.8 W	97.7 W
	Standby Power Consumption	Less than 0.5W					
	Standards	UL	UL	UL	UL	UL	UL
	EMC Certification	FCC	FCC	FCC	FCC	FCC	FCC
MADD ANTLY O	Environmental	EPEAT, ISTA6					
WARRANTY & OTHER	Accessories	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory	L-Con Remote Control, Power Cable (2m, Attached), Optional Chromecast Anti-theft Accessory

https://www.twitter.com/LGCommDisplays



in https://www.linkedin.com/company/lg-commercial-displays-usa

1:4 HDMI® Distribution Amplifier w/4K60 4:4:4 & HDR Support

- > Splits one HDMI® source to four outputs
- > Handles 4K60 4:4:4 and HDR video signals [1]
- > Fully compatible with HD 1080p, UHD 4K, and DCI 4K sources and displays
- Handles 3D video and Deep Color
- > Handles Dolby® TrueHD, Dolby Atmos®, DTS HD®, DTS:X®, and uncompressed 7.1 linear PCM audio
- > Selectable handling of HDCP 2.2 or HDCP 1.4
- > EDID management options
- > Input and output video presence indication
- > No programming or control system required
- > Thin profile less than one inch deep
- > Surface, shelf, or single rack rail mountable
- > External 100-240V universal power pack included

The Crestron® HD-DA4-4KZ-E is a simple to use, high-performance 4K AV distribution amplifier designed to split a single HDMI® signal to feed up to four separate displays, switchers, and/or other devices. It provides full support for UHD and DCI 4K60 4:4:4 and HDR video, HDCP 1.4 or 2.2 copy protection, and high-bitrate 7.1 audio, to ensure optimal performance and compatibility for any HD or 4K video application. No programming or control system is required for operation.[1]

For smaller or larger applications, refer to models HD-DA2-4KZ-E and HD-DA8-4KZ-E.

SPECIFICATIONS

Video

Input Signal Type: HDMI w/HDR10, Deep Color, 3D, & 4K60 4:4:4 support [1] (DVI & Dual-Mode DisplayPort compatible [2])

Output Signal Type: HDMI w/HDR10, Deep Color, 3D, & 4K60 4:4:4

support [1] (DVI compatible [2])

Copy Protection: Selectable for HDCP 2.2, HDCP 1.4, or HDCP disabled

Maximum Resolutions:

Scan Type	Resolution	Frame Rate	Color Sampling	Color Depth
		24 Hz	4:4:4	36 bit
	4096x2160 DCI 4K	30 Hz	4:4:4	36 bit
Drogragoiya	& 3840x2160 4K UHD	60 Hz	4:2:2	36 bit
Progressive	OO TOXE TOO THE OTTE	60 Hz	4:4:4	24 bit
	2560x1600 WQXGA	60 Hz	4:4:4	36 bit
	1920x1080 HD1080p	60 Hz	4:4:4	36 bit
Interlaced	1920x1080 HD1080i	30 Hz	4:4:4	36 bit

NOTE: Common resolutions are shown; other resolutions are supported at pixel clock rates up to 600 MHz



Audio

Input Signal Type: HDMI (Dual-Mode DisplayPort compatible [2])

Output Signal Type: HDMI

Formats: Dolby Digital®, Dolby Digital EX, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos, DTS®, DTS-ES, DTS 96/24, DTS HD High Res, DTS HD Master

Audio, DTS:X, LPCM up to 8 channels

Communications

USB: USB 2.0 host; supports firmware update and custom EDID upload via a USB flash drive

HDMI: HDCP & EDID (does not pass CEC)

HDCP Version: Selectable for HDCP 2.2, 1.4, or OFF;

HDCP encrypted content is blanked in OFF mode

EDID Mode: Selectable for DEFAULT or COPY 1ST;

- The factory default EDID is 4K60 4:4:4 non-HDR video with 2-channel LPCM audio;
- The factory default EDID can be replaced with a custom EDID
- Sliding the switch from DEFAULT to COPY 1ST copies and stores the EDID from the device at OUTPUT 1 and passes it to the INPUT source device;
- Sliding the switch from COPY 1ST to DEFAULT erases the stored EDID and uses the factory default or custom EDID;

Note: Changing the device at OUTPUT 1 will not update the stored EDID until the switch is moved to DEFAULT and back to COPY 1ST

Connectors

INPUT: (1) HDMI Type A connector, female;

HDMI digital video/audio input [1];

(DVI & Dual-Mode DisplayPort compatible [2])

OUTPUT 1 – 4: (4) HDMI Type A connectors, female;

HDMI digital video/audio outputs [1];

(DVI compatible [2])

SERVICE: (1) USB Type A connector, female;

USB 2.0 host port;

For firmware update and custom EDID upload via a USB flash drive

Agenda Item 9.(e) Approval of Quote Awards to multiple vendors for the I...

HD-DA4-4KZ-E 1:4 HDMI® Distribution Amplifier w/4K60 4:4:4 & HDR Support



HD-DA4-4KZ-E - Rear View

24VDC 0.75A: (1) 2.1 x 5.5 mm DC power connector;

24 Volt DC power input;

PW-2407WU power pack included

Controls & Indicators

PWR: (1) Bi-color LED, indicates operating power is supplied via the power pack; illuminates amber while booting, green when operating SETUP: (1) Pushbutton and (1) red LED, restores factory settings

RESET: (1) Recessed pushbutton for hardware reset

INPUT: (1) Green LED, indicates video signal presence at the HDMI input

OUTPUT 1 – 4: (4) Green LEDs, each indicates video signal transmission at the corresponding HDMI output

HDCP: (1) 3-position slide switch, selects the HDCP version (OFF, 1.4,

or 2.2)

EDID: (1) 2-position slide switch, selects the EDID mode (DEFAULT or COPY

Power

Power Pack (included): Input: 100-240 Volts AC, 50/60 Hz;

Output: 0.75 Amps @ 24 Volts DC;

Model: PW-2407WU

Power Consumption: 5.5 W (typical)

Environmental

Temperature: 32° to 104° F (0° to 40° C) Humidity: 10% to 90% RH (non-condensing)

Enclosure

Chassis: Metal, black finish, with (2) integral mounting flanges

Mounting: Freestanding, surface mount, or attach to a single rack rail

Dimensions

Height: 0.87 in (22 mm) Width: 8.09 in (206 mm) Depth: 4.67 in (119 mm)

Compliance

CE, IC, FCC part 15 Class B digital device

MODELS & ACCESSORIES

Available Models

HD-DA4-4KZ-E: 1:4 HDMI® Distribution Amplifier w/4K60 4:4:4 & HDR Support

Included Accessories

PW-2407WU: Wall Mount Power Pack, 24VDC, 0.75A, 2.1mm, Universal (Qty. 1 included)

Available Accessories

CBL-HD Series: High-Speed HDMI® Cables

Notes:

- 1. 4K60 4:4:4 and HDR support requires the use of HDMI cables and couplers with a minimum TMDS bandwidth of 18 Gbps. If 4K60 4:2:0 or 4K30 4:4:4 performance is acceptable, cables and couplers with a minimum bandwidth of 10.2 Gbps may be used. Please be aware that bandwidth loss is cumulative, so performance may be reduced when inserting multiple cables and couplers inline.
- HDMI requires an appropriate adapter or interface cable to accommodate a DVI or Dual-Mode DisplayPort signal. CBL-HD-DVI interface cables are available separately.


This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at https://www.crestron.com/How-To-Buy/Find-a-Representative or by calling 855-263-8754.

The specific patents that cover this and other Crestron products are listed online at https://www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, visit https://www.crestron.com/opensource.

Crestron and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Dolby, Dolby Atmos, and Dolby Digital are either trademarks or registered trademarks of Dolby Laboratories in the United States and/or other countries. DTS, DTS HD, and DTS:X are either trademarks or registered trademarks of DTS, Inc. in the United States and/or other countries. HDMI and the HDMI Logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice.

Agenda Item 9.(e) Approval of Quote Awards to multiple vendors for the I... **HD-DA4-4KZ-E** 1:4 HDMI® Distribution Amplifier w/4K60 4:4:4 & HDR Support

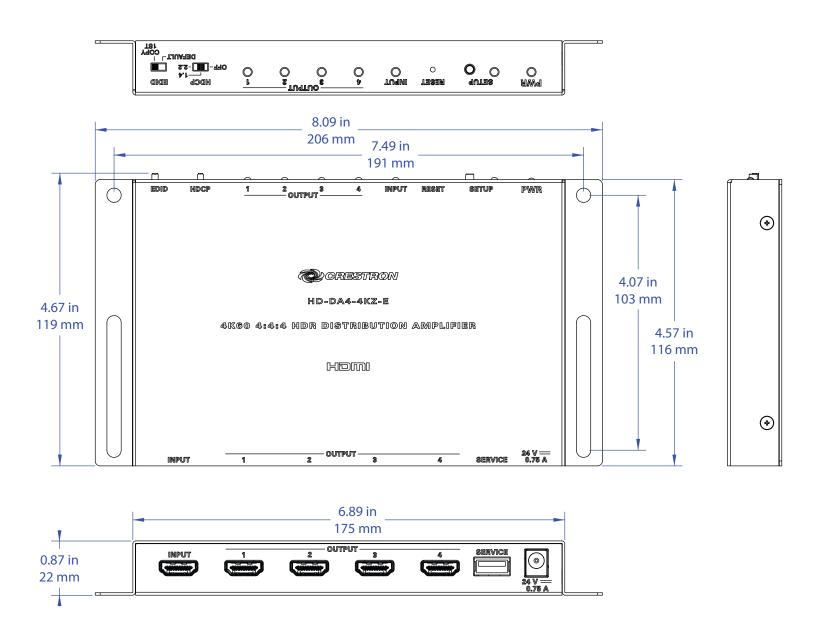

NETGEAR®

/// AV Line

AV Line Managed Switches





Switching Engineered for AV over IP

Introducing the NETGEAR AV Line of M4250 Switches, developed and engineered for audio/video professionals with dedicated service and support. M4250 has been built from the ground up for the growing AV over IP market, combining years of networking expertise in AV with M4300 and M4500 series with best practices from leading experts in the professional AV market. AV codecs

generally use 1Gbps or 10Gbps per stream and the AV Line of M4250 targets the widespread 1Gbps codecs.

PoE+, Ultra90 PoE++ and rear-facing ports ensure a clean integration in AV racks. M4250 switches come pre-configured for standard audio and video signals. When requirements are more specific, an AV user interface offers customization with port-based profiles. For audio Dante,

Q-SYS and AES67 profiles are available, as well as an AVB profile requiring an AVB license sold separately. For video the M4250 offers profiles for NVX, AMX, Q-SYS, NDI, Dante etc. as well as audio/video/control mixed profiles. When multiple switches are used, NETGEAR IGMP PlusTM brings automation for you to just connect them together, or with M4300 and M4500 switches.

Highlights

Extended AV features

- Dedicated AV web-based GUI interface for more specific AV installations
- Color-based AV profiles can be applied to the different ports
- Dante, Q-SYS, AES67 and AVB audio profiles
- AVB requires a license (sold separately)
- NVX, SVSI, Q-SYS, NDI and Dante video profiles
- Audio / video / control mixed profiles
- Automatic switch interconnect with NETGEAR Auto-Trunk, Auto-LAG and IGMP Plus
- Common Layer 2 and Layer 3 switching engine across all M4250 models

- Built-in IT web GUI, console, telnet and SSH consistent with other NETGEAR M4300 and M4500 series
- Feature set includes static, RIP and PIM routing, DHCP Server and PTPv2

Audio Video Bridging (AVB) services

- AVB is one of the many features designed into the M4250 product line
- AVB is an industry standard for transporting content over a network
- AVB is used most often when very low latency is required such as in live performances when lip sync is critical
- All of the AV Line M4250 switches can be optionally licensed for AVB support

Other IT use cases

 Standard or recessed mounting with all ports in the back, or all ports in the front Fully featured L2/L3/L4 platform for midsize Enterprise campus networks, IoT and IPTV

Industry standard management

- Industry standard command line interface (CLI), main NETGEAR IT web interface (GUI), SNMP, sFlow and RSPAN
- Single-pane-of-glass NMS300
 management platform with centralized
 firmware updates and massconfiguration support

Industry leading warranty

- NETGEAR M4250 series is covered under NETGEAR ProSAFE Limited Lifetime Hardware Warranty*
- 90 days of Technical Support via phone and email, Lifetime Technical Support through online chat and Lifetime Next Business Day hardware replacement

AV Line Managed Switches

AV Line

Hardware-at-a-Glance

				REAR (REVERSIBLE)*			LEDs	MANAGEMENT		
Model Name	Form-Factor	Switch- ing Fabric	10/100/1000 BASE-T RJ45 ports	100/1000/2.5G BASE-T RJ45 ports	1000BASE-X SFP ports	1000/10G BASE-X SFP+ ports	PSU	Status Information	Out-of-band Console	Model Number	
M4250-10G2F-PoE+	1U rackmount 440 x 43.2 x 200mm	24 Gbps	8 ports PoE+ (125W) 2 additional ports	-	2 ports SFP 1G	-	1 x Fixed (C14) On/off switch			GSM4212P	
M4250-10G2XF-PoE+	1U rackmount 440 x 43.2 x 200mm	60 Gbps	8 ports PoE+ (240W) 2 additional ports	-	-	2 ports SFP+ 1G, 10G	1 x Fixed (C14) On/off switch			GSM4212PX	
M4250-10G2XF-PoE++	1U rackmount 440 x 43.2 x 257mm	60 Gbps	8 ports PoE++** (720W) 2 additional ports	-	-	2 ports SFP+ 1G, 10G	1 x Fixed (C14) On/off switch			GSM4212UX	
M4250-26G4F-PoE+	1U rackmount 440x43.2x257mm	60 Gbps	24 ports PoE+ (300W) 2 additional ports	-	4 ports SFP 1G		1 x Fixed (C14) On/Off switch			GSM4230P	
M4250-26G4F-PoE++	1U rackmount 440x43.2x400mm	60 Gbps	24 ports PoE++ (1,440W)** (1 PSU/720W; 2 PSU/1,440W) 2 additional ports	-	4 ports SFP 1G		2 x Fixed (C14) On/Off switch	Available both in front and in	Ethernet: 1G Out-of-band (Rear)	GSM4230UP	
M4250-26G4XF-PoE+	1U rackmount 440x43.2x400mm	132 Gbps	24 ports PoE+ (480W) 2 additional ports	-	-	4 ports SFP+ 1G; 10G	1 x Fixed (C14) On/Off switch	the rear:	Console: RJ45 RS232 (Rear) Console:	GSM4230PX	
M4250-40G8F-PoE+	1U rackmount 440x43.2x400mm	96 Gbps	40 ports PoE+ (480W)	-	8 ports SFP 1G		1 x Fixed (C14) On/Off switch	Power LED PoE Max LED	USB-C (Rear) Storage:	GSM4248P	
M4250-40G8XF-PoE+	1U rackmount 440x43.2x400mm	240 Gbps	40 ports PoE+ (960W)	-	-	8 ports SFP+ 1G; 10G	1 x Fixed (C14) On/Off switch	(PoE models) Fan LED	USB-A (Front) LED Ext:	GSM4248PX	
M4250-40G8XF-PoE++	2U rackmount 440x86.4x350mm	240 Gbps	40 ports PoE++ (2,880W)** (1 PSU/720W; 2 PSU/1,650W; 3 PSU/2,880W)	-	-	8 ports SFP+ 1G; 10G	3 x Fixed (C14) On/Off switch	Port LEDs	USB-C (Front)	GSM4248UX	
M4250-12M2XF	1U rackmount 440x43.2x100mm	100 Gbps	-	12 ports 100M, 1G, 2.5G	-	2 ports SFP+ 1G, 10G	1 x Fixed (C14) On/Off switch			MSM4214X	
M4250-16XF	1U rackmount 440x43.2x200mm	320 Gbps	-	-	-	16 ports SFP+ 10G only (First 12 ports support 1G)	1 x Fixed (C14) On/Off switch			XSM4216F	

^{*} Reversed mounting is possible when ports are desired on the front of the rack by using the standard rackmount ears, or the included alternate rackmount ears to mount the switch recessed by 2-Inches to allow for the cabling.

^{**} Ultra90 PoE++ 802.3bt is compatible with 802.3af PoE (15.4W), 802.3at PoE+ (30W) and 802.3bt (60W, 75W and 90W).





Datasheet | M4250 series

AV Line Managed Switches

AV Line

Acoustic-at-a-Glance

	FAN	OFF MODE	Setting / maxi	mum load	ding*	QL	JIET MC	DDE Setting at	25°C ambient'	**	COOL	ing at 25°C		
Model Name	Fanless State	Ambient	Sensor	PoE Power Load	Conditions	PoE Power Load	Fan Duty	Sensor	Case Temp (Top)	Acoustic	Fan Duty	Case Temp (Top)	Acoustic	Model Number
M4250-10G2F-PoE+	0dBA / 41.8°C Case Temp	25°C	<= 42°C	80W	All ports can be used	125W	25	<= 36°C	35.9°C	27.38dBA	100	27.2°C	55dBA	GSM4212P
M4250-10G2XF-PoE+	0dBA / 39.6°C Case Temp	25°C	<= 44°C	90W	All ports can be used	240W	25	<= 37°C	40.6°C	27.4dBA	100	30.9°C	56dBA	GSM4212PX
						0-250W	25	<= 49°C	42.9°C	34.57dBA				
M4050 40C0VF B. F	0dBA / 44.6°C	2500	. (700	45)4/	All ports can	250-380W	30	<= 49°C	43.3°C	40dBA	100	44.000	// 22 IDA	CCNAAOAOUN
M4250-10G2XF-PoE++	Case Temp	25°C	<= 67°C	45W	be used	380W-500W	35	<= 49°C	44.9°C	44.22dBA	100	41.8°C	66.23dBA	GSM4212UX
						500W-720W	40	<= 49°C	52.1℃	47.19dBA				
	0dBA / 40.5°C		S1<= 43°C		8 ports PoE	0-200W	25	S1<= 43°C S2<=47°C	43.5°C	28dBA				
M4250-26G4F-PoE+	Case Temp	25°C	S2<= 47°C	45W	(no SFP)	200W-300W	30	S1<= 44°C S2<=48°C	51.3°C	34dBA	100	36.7°C	57dBA	GSM4230P
				ı		0-280W	20	S1<= 37°C S2<=39°C	52.9°C	28dBA				
						280W-360W	25	S1<= 38°C S2<=40°C	57.4°C	36dBA				
			360W-420W	30	S1<= 39°C S2<=41°C	54.4°C	41dBA				GSM4230UP			
			420W-480W	35	S1<= 40°C S2<=42°C	53.3°C	47dBA	100	720W 36.7°C					
M4250-26G4F-PoE++			480W-540W	40	S1<= 41°C S2<=43°C	52.3°C	50dBA		1,440W 46°C	69dBA				
						540W-600W	45	S1<= 42°C S2<=44°C	54.4°C	54dBA				
						600W-660W	50	S1<= 43°C S2<=45°C	53.6°C	57dBA				
						660W-1,440W	55	S1<= 44°C S2<=46°C	55.7°C	60dBA				
	0dBA / 43.4°C		S1<= 41°C		8 ports PoE	0-350W	20	S1<= 41°C S2<=46°C	39.3℃	25dBA				
M4250-26G4XF-PoE+	Case Temp	25°C	S2<= 46°C	45W	(no SFP+)	350W-480W	30	S1<= 42°C S2<=47°C	36.8℃	42dBA	100	32.3℃	67dBA	GSM4230PX
						0-150W	20	S1<= 37°C S2<=50°C	43.1°C	30dBA				
	0dBA / 45.2°C		S1<= 37°C		8 ports PoE	150W-200W	25	S1<= 38°C	42.1°C	36dBA				
M4250-40G8F-PoE+	Case Temp	25°C	S1<= 37°C S2<= 50°C	30W	8 ports PoE (No SFP)	200W-340W	30	S1<= 39°C S2<=51°C	44°C	40dBA	100	35.4°C	68dBA	GSM4248P
						340W-480W	35	S1<= 40°C	47.6°C	47dBA				

AV Line Managed Switches


//// AV Line

Acoustic-at-a-Glance

	FAN (OFF MODE :	Setting / maxi	mum loac	ling*	QL	JIET MC	ODE Setting at	25°C ambient	**	COOL I	MODE Setti t**	ng at 25°C	
Model Name	Fanless State	Ambient	Sensor	PoE Power Load	Conditions	PoE Power Load	Fan Duty	Sensor	Case Temp (Top)	Acoustic	Fan Duty	Case Temp (Top)	Acoustic	Model Numbe
						0-400W	20	S1<= 33°C S2<=46°C	54.2°C	29dBA				
						400W-480W	25	S1<= 34°C S2<=47°C	42.8°C	35dBA				
						480W-560W	30	S1<= 35°C S2<=48°C	41.9°C	41dBA				
MAGEO AGGOVE D. E.			.6			560W-640W	35	S1<= 36°C S2<=49°C	42.1°C	48dBA	100	36.1°C	69dBA	CCMA0 AODY
M4250-40G8XF-PoE+		IN	ot Supported			640W-720W	40	S1<= 37°C S2<=50°C	40.9°C	51dBA	100	36.1-0	69abA	GSM4248PX
						720W-800W	45	S1<= 38°C S2<=51°C	40.7°C	54dBA				
								S1<= 39°C S2<=52°C	40.4°C	57dBA				
						880W-960W	55	S1<= 40°C S2<=53°C	40.5°C	59dBA				
						0-160W	20	S1<= 37°C S2<=49°C	41.3°C	30dBA				
						160W-240W	25	S1<= 38°C	38.8℃	36dBA				
						240W-320W	30	S1<= 39°C S2<=50°C	36.4°C	42dBA		720W 31.4°C		
M4250-40G8XF-PoE++		N	ot Supported			320W-400W	35	S1<= 40°C	35.3℃	49dBA	100	1,650W	71dBA	GSM4248UX
W4230-40G6AF-F0E++		IV	ot supported			400W-480W	40	S1<= 41°C S2<=51°C	34.4°C	51dBA	100	33.5℃	7 IUDA	G3IVI4246UX
						480W-560W	45	S1<= 42°C	34.3°C	55dBA		2,880W 35.4°C		
						560W-640W	50	S1<= 43°C S2<=52°C	35.1℃	57dBA				
						660W-2,880W	55	S1<= 44°C	36.5℃	60dBA				
M4250-12M2XF	0dBA / 56°C Case Temp	25°C	<= 64°C	-	8 ports 2.5G (no SFP+)	-	25	<= 58°C	53.5°C	28.5dBA	100	33.2°C	55dBA	MSM4214X
M4250-16XF	0dBA / 41.3°C Case Temp	25°C	<= 78°C	-	8 ports SFP+	-	25	<= 67°C	41.6°C	27.44dBA	100	30.3°C	57dBA	XSM4216F

 $^{^{\}star}$ Software-controlled fan adjustments enable the fans to be turned off when ambient temperature and PoE loads are appropriate for a totally fanless operation.

^{**} dBA values are SPL (Sound Pressure Level) values, testing following the ISO-7779 standard. By stander Mode. Chamber Temp 25°C during testing. Full, 100%, Data and PoE loaded. Worst case.

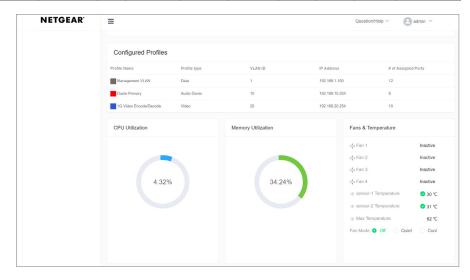

AV Line Managed Switches

AV Line

Software-at-a-Glance

					LITE LAYER	3 PACKAGE						
Model Name	Management	AV Dedicated UI	IPv4 / IPv6 ACL and QoS, DiffServ	IPv4 / IPv6 Multicast Filtering	IPv4 / IPv6 Policing and Convergence	Spanning Tree Green Ethernet	VLANs	Trunking Port Channel	IPv4 / IPv6 Authentication Security	IPv4 / IPv6 Static Routing	IPv4 / IPv6 Dynamic Routing	Model Number
M4250 series	Out-of-band IT Web GUI (main) HTTPs CLI; Telnet; SSH SNMP, MIBs RSPAN Radius Users, TACACS+	AV web-based GUI Designed for AV installers AV-related controls Audio over IP profiles AVB profile* Video over IP profiles Mixed Audio and Video profiles	Ingress/ egress 1 Kbps shaping Time-based Single Rate Policing	NETGEAR IGMP TM Plus for automated IGMP between switches IGMPv3 MLDv2 Snooping, Proxy ASM & SSM IGMPv1,v2 Querier (compatible v3) Control Packet Flooding	Auto-VoIP Policy-based routing (PBR) LLDP-MED IEEE 1588 PTPV2 1-Step End-to-End Transparent Clock AVB*: 802.1AS, 802.1Qav, 802.1Qat MSRP, 802.1ak MMRP, 802.1ak MMRP, 802.1ak MMRP,	STP, MTP, RSTP PV(R)STP BPDU/STRG Root Guard EEE 802.3az (EEE is disabled by default)	Static, Dynamic, Voice, MAC GVRP/ GMRP Double VLAN mode	Auto-Trunk and Auto-LAG between M4250 Switches Static LAG, or Dynamic LACP (LACP automatically reverts to and from Static LAG) Seven (7) L2/ L3/L4 hashing algorithms	Successive Tiering (DOT1X; MAB; Captive Portal) DHCP Snooping Dynamic ARP Inspection IP Source Guard	Port, Subnet, VLAN routing Multicast static routes DHCPv4 Server DHCP Relay Stateful DHCPv6 Server	IPv4: RIP IPv4/IPv6: PIM-SM PIM-DM SSM	All models

^{*} Requires AVB license, sold separately. All other software features are available, license-free.





Datasheet | M4250 series

AV Line Managed Switches

AV Line

Performance-at-a-Glance

						TA	BLE SIZE							
Model Name	MAC ARP/NDP	Routing/ Switching Capacity	Throughput 64-byte	Application Route Scaling	Packet Buffer	Latency	CPU	IP Multicast Routing Entries	Jumbo Frames	Multicast IGMP Group membership	VLANs	DHCP	sFlow	Model Number
M4250-10G2F-PoE+	16K MAC 4K ARP/ NDP	24 Gbps Line-Rate	17.86 Mpps	Static: 894v4/126v6 RIP: 32v4	16Mb	<2.27μs 1G								GSM4212P
M4250-10G2XF-PoE+	16K MAC 4K ARP/ NDP	60 Gbps Line-Rate	44.64 Mpps	Static: 894v4/126v6 RIP: 32v4	16Mb	<2.14μs 1G <0.84μs 10G	ARM A9 1.25Ghz 32-Bit 2GB RAM							GSM4212PX
M4250-10G2XF-PoE++	16K MAC 4K ARP/ NDP	60 Gbps Line-Rate	44.64 Mpps	Static: 894v4/126v6 RIP: 32v4	16Mb	<1.84µs 1G <0.81µs 10G								GSM4212UX
M4250-26G4F-PoE+	16K MAC 4K ARP/NDP	60 Gbps Line-Rate	44.64 Mpps	Static: 894v4/126v6 RIP: 32v4	16Mb	<2.15.µs 1G					4K VLANs			GSM4230P
M4250-26G4F-PoE++	16K MAC 4K ARP/NDP	60 Gbps Line-Rate	44.64 Mpps	Static: 894v4/126v6 RIP: 32v4	16Mb	<2.15µs 1G		512 IPv4 128 IPv6	Up to 12K	2K IPv4 2K IPv6		DHCP Server: 2K leases IPv4: 256 pools	16 samplers 16 pollers 8 receivers	GSM4230UP
M4250-26G4XF-PoE+	16K MAC 4K ARP/NDP	132 Gbps Line-Rate	98.21 Mpps	Static: 894v4/126v6 RIP: 32v4	16Mb	<2.29μs 1G <0.83μs 10G	Quad-Core Cortex-A57 ARMv8							GSM4230PX
M4250-40G8F-PoE+	16K MAC 4K ARP/NDP	96 Gbps Line-Rate	71.42 Mpps	Static: 894v4/126v6 RIP: 32v4	32Mb	<2.46µs 1G	1.8Ghz 64-bit 2GB RAM					IPv6: 16 pools		GSM4248P
M4250-40G8XF-PoE+	16K MAC 4K ARP/NDP	240 Gbps Line-Rate	178.56 Mpps	Static: 894v4/126v6 RIP: 32v4	32Mb	<2.74μs 1G <0.73μs 10G								GSM4248PX
M4250-40G8XF-PoE++	16K MAC 4K ARP/NDP	240 Gbps Line-Rate	178.56 Mpps	Static: 894v4/126v6 RIP: 32v4	32Mb	<2.78µs 1G <0.73µs 10G								GSM4248UX
M4250-12M2XF	16K MAC 4K ARP/ NDP	100 Gbps Line-Rate	74.40 Mpps	Static: 894v4/126v6 RIP: 32v4	16Mb	<2.84.µs 1G <6.02µs 2.5G <0.81µs 10G	ARM A9 1.25Ghz							MSM4214X
M4250-16XF	16K MAC 4K ARP/ NDP	320 Gbps Line-Rate	238.08 Mpps	Static: 894v4/126v6 RIP: 32v4	16Mb	<1.30μs 1G <0.86μs 10G	32-Bit 2GB RAM							XSM4216F

//// AV Line

AV Line Managed Switches

Product Brief





The NETGEAR AV Line M4250 series was designed with input from AV Professionals. The result is a line of switches built from the ground up to support 1Gb audio and video over IP with customized hardware and software along with dedicated service and support.

NETGEAR M4250 series key features:

- Ranges from 8 to 48 ports with a variety of PoE+ and Ultra90 PoE++ options for 15.4W, 30W, 60W, 75W and 90W AVoIP endpoints
- Uplink options include 1G for audio installations or standalone video installations as well as 10G uplinks for larger scale video deployments
- Also includes 12-port multi-gigabit Ethernet and 16-port 1G/10G fiber models for plug and play aggregation in a star topology
- Designed for a clean integration with traditional, rack-mounted, AV equipment
- The M4250 switches come with a sleek, black display panel with status in front and all cabling plus additional status in the back
- Reversed mounting is possible when ports are desired on the front of the rack
- A second pair of rackmount ears allows the switches to be mounted recessed by 2-inches to allow for the cabling

- Software-controlled fan adjustments enable the fans to be turned off when ambient temperature and PoE loads are appropriate for a totally fanless operation
- Threaded holes on the bottom (4xM5 for 50x100mm VESA) and in front (1xM10 for clamps) allow for universal mounting options outside the rack as well

NETGEAR M4250 series AV software features:

- Pre-configured for audio and video over IP out of the box, the M4250 switches enable encoders and decoders to be connected with zero configuration
- When more configuration is required, an AV web-based GUI is available
- This interface has been specially designed for AV installers with specific AV-related controls made more accessible and with port-based profiles
- For audio, profiles for Dante, Q-SYS and AES67 are built-in, as well as an AVB profile (AVB license sold separately)

- For video, the M4250 offers profiles for NVX, SVSI, Q-SYS, NDI, Kramer KDS, Aurora Multimedia, ZeeVee, Atlona, Dante and SDVoE
- Other AV CODECs and manufacturers are supported as well as audio/video/ control mixed profiles
- To further simplify star deployments, NETGEAR IGMP Plus[™] brings multicast automation between all M4250 switches, and with M4300/M4500
- With Auto-Trunk and Auto-LAG, simply connect M4250 switches together and you are done!

NETGEAR M4250 series other software features:

- All M4250 switches share the same high-end NETGEAR Layer 2 / Layer 3 switching engine for a consistent experience
- All switches in the M4250 series have another main, IT web-based GUI for midsize Enterprise campus networks, IoT and IPTV

AV Line Managed Switches //// AV Line

- Additional features include static, RIP and PIM-SM, DM and SSM multicast routing, DHCP Server and PTPv2 Transparent Clock (1-step E2E)
- AVB is the only feature requiring a license, all other advanced features are available license-free
- Advanced classifier-based, time-based hardware implementation for L2 (MAC), L3 (IP) and L4 (UDP/TCP transport ports) security and prioritization
- Selectable Port-Channel / LAG (802.3ad - 802.1AX) L2/L3/L4 hashing for fault tolerance and load sharing with any type of Ethernet channeling
- Voice VLAN with SIP, H323 and SCCP protocols detection and LLDP-MED IP phones automatic QoS and VLAN configuration
- Efficient authentication tiering with successive DOT1X, MAB and Captive Portal methods for streamlined BYOD
- Comprehensive IPv4/IPv6 static and dynamic routing including Policy-based routing and 6-to-4 tunneling
- Advanced IPv4/IPv6 security implementation including malicious code detection, DHCP Snooping, IP Source Guard protection and DoS attacks mitigation

NETGEAR M4250 series management features:

- DHCP/BootP innovative auto-installation including firmware and configuration file upload automation
- Industry standard SNMP, RMON, MIB, LLDP, AAA, sFlow, RSPAN and PTPv2
- Service port for out-of-band Ethernet management (OOB)
- Standard RS232 straight-through serial RJ45 and USB Type-C ports for local management console
- Standard USB-A port for local storage, logs, configuration or image files
- Dual firmware image for updates with minimum service interruption
- Single-pane-of-glass NMS300 management platform with mass configuration support
- Industry standard command line interface (CLI) for IT admins used to other vendors commands
- Fully functional Web console (main GUI) for IT admins who prefer an easy to use graphical interface
- Dedicated AV web-based GUI interface available at [switch IP address:8080] for AV installations

NETGEAR M4250 series warranty and support:

- NETGEAR ProSAFE Limited Lifetime Hardware Warranty**
- Included Lifetime Technical Support
- Included Lifetime Next Business Day Hardware Replacement
- Offering free network design services and installation support, the NETGEAR Engineering Services Team is ready to help ensure your 1G deployments with the M4250 AV over IP switches go as smooth as possible. Just drop us an email at ProAVDesign@netgear.com to get started!







//// AV Line


AV Line Managed Switches

Features highlights

Dedicated AV UI for AV installations

M4250 switch series is pre-configured for Audio and Video over IP out of the box with a dedicated AV web-based GUI interface for more specific AV installations

- Color-based AV profiles can be applied to the different ports
- Dante, Q-SYS, AES67 and AVB audio profiles (AVB license sold separately)
- NVX, AMX, Q-SYS, NDI, Kramer KDS, Aurora Multimedia, ZeeVee, Atlona, Dante, etc. video profiles
- Audio / video / control mixed profiles

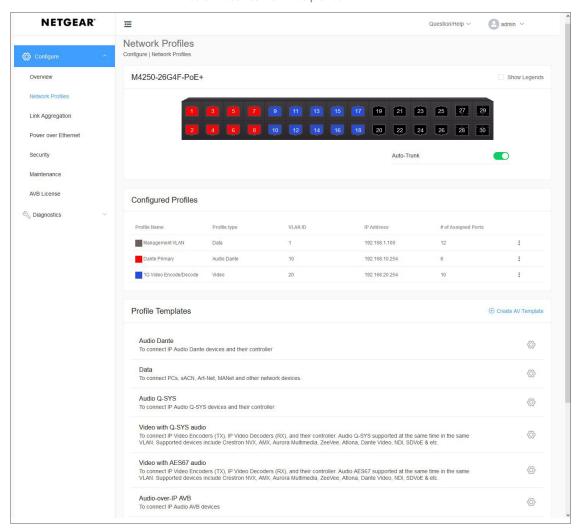

Best value switching performance:

16K MAC address table, 4K ARP and 4K concurrent VLANs for typical midsize environnements

Low latency at all network speeds, including 10 Gigabit fiber interfaces

Jumbo frames support of up to 12KB accelerating performance with compatible nodes

Ranges from 8 to 48 ports with a variety of PoE+ and Ultra90 PoE++ 802.3bt options for 15.4W, 30W, 60W, 75W and 90W AVoIP (1G) endpoints

AV Line Managed Switches

Datasheet | M4250 series

//// AV Line

Tier 1 availability

Rapid Spanning Tree (RSTP) and Multiple Spanning Tree (MSTP) allow for rapid transitionning of the ports to the Forwarding state and the suppression of Topology Change Notification

NETGEAR PVSTP implementation follows the same rules than other vendor's Per VLAN STP for strict interoperability

- Including industry-standard PVST+ interoperability
- PVSTP is similar to the MSTP protocol as defined by IEEE 802.1s, the main difference being PVSTP runs one
 instance per VLAN
- In other words, each configured VLAN runs an independent instance of PVSTP
- FastUplink feature immediately moves an alternate port with lowest cost to forwarding state when the root port goes down to reduce recovery time
- FastBackbone feature selects new indirect port when an indirect port fails

NETGEAR PVRSTP implementation follows the same rules than other vendor's Per VLAN RSTP for strict interoperability

- · Including industry-standard RPVST+ interoperability
- PVRSTP is similar to the RSTP protocol as defined by IEEE 802.1w, the main difference being PVRSTP runs one instance per VLAN
- In other words, each configured VLAN runs an independent instance of PVRSTP
- Each PVRSTP instance elects a root bridge independent of the other
- Hence there are as many Root Bridges in the region as there are VLANs configured
- Per VLAN RSTP has in built support for FastUplink and FastBackbone

IP address conflict detection performed by embedded DHCP servers prevents accidental IP address duplicates from perturbing the overall network stability

IP Event Dampening reduces the effect of interface flaps on routing protocols: the routing protocols temporarily disable their processing (on the unstable interface) until the interface becomes stable, thereby greatly increasing the overall stability of the network

Ease of deployment

Automatic configuration with DHCP and BootP Auto Install eases large deployments with a scalable configuration files management capability, mapping IP addresses and host names and providing individual configuration files to multiple switches as soon as they are initialized on the network

Both the Switch Serial Number and primary MAC address are reported by a simple "show hardware" command in CLI - facilitating discovery and remote configuration operations

M4300 DHCP L2 Relay agents eliminate the need to have a DHCP server on each physical network or subnet

- DHCP Relay agents process DHCP messages and generate new DHCP messages
- Supports DHCP Relay Option 82 circuit-id and remote-id for VLANs
- DHCP Relay agents are typically IP routing-aware devices and can be referred to as Layer 3 relay agents

Automatic Voice over IP prioritization with Auto-VoIP simplifies most complex multi-vendor IP telephones deployments either based on protocols (SIP, H323 and SCCP) or on OUI bytes (default database and user-based OUIs) in the phone source MAC address; providing the best class of service to VoIP streams (both data and signaling) over other ordinary traffic by classifying traffic, and enabling correct egress queue configuration

An associated Voice VLAN can be easily configured with Auto-VoIP for further traffic isolation

When deployed IP phones are LLDP-MED compliant, the Voice VLAN will use LLDP-MED to pass on the VLAN ID, 802.1P priority and DSCP values to the IP phones, accelerating convergent deployments

Ease of management and granular control

Dual firmware image and dual configuration file for transparent firmware updates / configuration changes with minimum service interruption

Flexible Port-Channel/LAG (802.3ad - 802.1AX) implementation for maximum compatibility, fault tolerance and load sharing with any type of Ethernet channeling from other vendors switch, server or storage devices conforming to IEEE 802.3ad - including static (selectable hashing algorithms) - or to IEEE 802.1AX with dynamic LAGs or port-channel (highly tunable LACP Link Aggregation Control Protocol)

LACP mode automatically reverts to and from Static LAG, useful when the host isn't LACP anymore, for instance during a factory reset or re-configuration

Auto-LAG: If more than one link between two M4250 switches, a Link Aggregation Group is created, dynamically

Unidirectional Link Detection Protocol (UDLD) and Aggressive UDLD detect and avoid unidirectional links automatically, in order to prevent forwarding anomalies in a Layer 2 communication channel in which a bi-directional link stops passing traffic in one direction

Port names feature allows for descriptive names on all interfaces and better clarity in real word admin daily tasks

//// AV Line

Datasheet | M4250 series

AV Line Managed Switches

SDM (System Data Management, or switch database) templates allow for granular system resources distribution depending on IPv4 or IPv6 applications

- ARP Entries (the maximum number of entries in the IPv4 Address Resolution Protocol ARP cache for routing interfaces)
- IPv4 Unicast Routes (the maximum number of IPv4 unicast forwarding table entries)
- IPv6 NDP Entries (the maximum number of IPv6 Neighbor Discovery Protocol NDP cache entries)
- IPv6 Unicast Routes (the maximum number of IPv6 unicast forwarding table entries)
- ECMP Next Hops (the maximum number of next hops that can be installed in the IPv4 and IPv6 unicast forwarding tables)
- IPv4 Multicast Routes (the maximum number of IPv4 multicast forwarding table entries)
- IPv6 Multicast Routes (the maximum number of IPv6 multicast forwarding table entries)

Loopback interfaces management for routing protocols administration

Private VLANs and local Proxy ARP help reduce broadcast with added security

Management VLAN ID is user selectable for best convenience

Auto-Trunk: Dynamic VLAN trunking as soon as a M4250 switch gets connected to another M4250 switch

Industry-standard VLAN management in the command line interface (CLI) for all common operations such as VLAN creation; VLAN names; VLAN "make static" for dynamically created VLAN by GVRP registration; VLAN trunking; VLAN participation as well as VLAN ID (PVID) and VLAN tagging for one interface, a group of interfaces or all interfaces at once

Simplified VLAN configuration with industry-standard Access Ports for 802.1Q unaware endpoints and Trunk Ports for switch-to-switch links with Native VLAN

System defaults automatically set per-port broadcast, multicast, and unicast storm control for typical, robust protection against DoS attacks and faulty clients which can, with BYOD, often create network and performance issues

IP Telephony administration is simplified with consistent Voice VLAN capabilities per the industry standards and automatic functions associated

Comprehensive set of "system utilities" and "Clear" commands help troubleshoot connectivity issues and restore various configurations to their factory defaults for maximum admin efficiency: traceroute (to discover the routes that packets actually take when traveling on a hop-by-hop basis and with a synchronous response when initiated from the CLI), clear dynamically learned MAC addresses, counters, IGMP snooping table entries from the Multicast forwarding database etc...

Syslog and Packet Captures can be sent to USB storage for rapid network troubleshooting

Replaceable factory-default configuration file for predictable network reset in distributed branch offices without IT personnel

All major centralized software distribution platforms are supported for central software upgrades and configuration files management (HTTP, TFTP), including in highly secured versions (HTTPS, SFTP, SCP)

Simple Network Time Protocol (SNTP) can be used to synchronize network resources and for adaptation of NTP, and can provide synchronized network timestamp either in broadcast or unicast mode (SNTP client implemented over UDP - port 123)

 ${\bf Embedded\ RMON\ (4\ groups)\ and\ sFlow\ agents\ permit\ external\ network\ traffic\ analysis}$

Engineered for convergence and AV-over-IP

Audio (Voice over IP) and Video (multicasting) comprehensive switching, filtering, routing and prioritization

Auto-VoIP, Voice VLAN and LLDP-MED support for IP phones QoS and VLAN configuration

IEEE 1588 (section 10 and 11.5) PTPv2 Transparent Clock (TC) End-to-End implementation considering the residence time of PTPv2 packets from ingress to egress

- 1-step Transparent Clock mode, using the residence time of the PPTPv2 packet at the egress port level in Standalone mode, or Stack Master only
- The "Sync" & "Delay_Req" fields of passing/egressing out PTPv2 packets are updated with the residence time in the switch, the other fields in PTPv2 packets ("Announce", "Delay_Resp", "Pdelay_Req" and "Pdelay_ Resp") are not updated
- NETGEAR IGMP PlusTM for automatic multicast across a M4250 / M4300 / M4500 L2 network (Spine and Leaf topologies), removing the need for L3 PIM routing
- IGMP Plus is pre-configured on default VLAN 1 out of the box
- IGMP Plus can be configured on another VLAN for automatic IGMP across switches on that VLAN (uplinks can make part of that VLAN in trunk mode)
- IGMP Plus allow AV-over-IP devices (TX/Encoders and RX/Decoders) to be connected across multiple switches in a star topology
- The show igmpsnooping group command in CLI and GUI displays the Source and Group IP addresses along with their corresponding MAC addresses that are learnt through IGMP Snooping in a given VLAN on a given interface

 $The \ M4250 \ series \ automatically \ configure \ the \ interconnect \ between \ switches \ for \ robust \ topologies$

With IGMP Plus, Auto-Trunk and Auto-LAG, your deployment will JUST WORK

/// AV Line

Datasheet | M4250 series

AV Line Managed Switches

IGMP Snooping and Proxy for IPv4, MLD Snooping and Proxy for IPv6, and Querier mode facilitate fast receivers joins and leaves for multicast streams and ensure multicast traffic only reaches interested receivers everywhere in a Layer 2 or a Layer 3 network, including source-specific (SSM) and any-source (ASM) multicast

Multicast VLAN Registration (MVR) uses a dedicated Multicast VLAN to forward multicast streams and avoid duplication for clients in different VLANs

Multicast routing (PIM-SM and PIM-DM, both IPv4 and IPv6) ensure multicast streams can reach receivers in different L3 subnets

PoE power management and schedule enablement for powering on and powering off PoE nodes connected to the switch

AVB is one of the many features designed into the M4250 product line

- IEEE 802.1BA-2011 Audio Video Bridging (AVB) when an AVB license is properly installed in the switch (license sold separately)
- IEEE 802.1AS-2011 gPTP, IEEE 802.1Qav-2009 FQTSS, IEEE 802.1Qat-2010 MSRP, IEEE 802.1ak MMRP, IEEE 802.1ak MVRP
- Maximum of 256 AVB streams per switch
- AVB is not supported in LAG (link aggregation groups, or Etherchannel)

Layer 3	routing	package
---------	---------	---------

Static Routes/ECMP Static Routes for IPv4 and IPv6

- Static and default routes are configurable with next IP address hops to any given destination
- · Permitting additional routes creates several options for the network administrator
- The admin can configure multiple next hops to a given destination, intending for the router to load share across the next hops
- The admin distinguishes static routes by specifying a route preference value: a lower preference value is a more preferred static route
- A less preferred static route is used if the more preferred static route is unusable (down link, or next hop cannot be resolved to a MAC address)

Advanced Static Routing functions for administrative traffic control

- Static Reject Routes are configurable to control the traffic destined to a particular network so that it is not forwarded through the router
- Such traffic is discarded and the ICMP destination unreachable message is sent back to the source
- Static reject routes can be typically used to prevent routing loops
- Default routes are configurable as a preference option

In order to facilitate VLAN creation and VLAN routing using Web GUI, a VLAN Routing Wizard offers following automated capabilities:

- Create a VLAN and generate a unique name for VLAN
- Add selected ports to the newly created VLAN and remove selected ports from the default VLAN
- Create a LAG, add selected ports to a LAG, then add this LAG to the newly created VLAN
- Enable tagging on selected ports if the port is in another VLAN
- Disable tagging if a selected port does not exist in another VLAN
- Exclude ports that are not selected from the VLAN
- Enable routing on the VLAN using the IP address and subnet mask entered as logical routing interface

DHCP Relay Agents relay DHCP requests from any routed interface, including VLANs, when DHCP server doesn't reside on the same IP network or subnet

- The agent relays requests from a subnet without a DHCP server to a server or next-hop agent on another
- Unlike a router which switches IP packets transparently, a DHCP relay agent processes DHCP messages and generates new DHCP messages
- Supports DHCP Relay Option 82 circuit-id and remote-id for VLANs
- Multiple Helper IPs feature allows to configure a DHCP relay agent with multiple DHCP server addresses per routing interface and to use different server addresses for client packets arriving on different interfaces on the relay agent server addresses for client packets arriving on different interfaces on the relay agent

Router Discovery Protocol is an extension to ICMP and enables hosts to dynamically discover the IP address of routers on local IP subnets

- Based on RFC 1256 for IPv4
- Routers periodically send router discovery messages to announce their presence to locally-attached hosts
- The router discovery message advertises one or more IP addresses on the router that hosts can use as their default gateway
- Hosts can send a router solicitation message asking any router that receives the message to immediately send a router advertisement
- Router discovery eliminates the need to manually configure a default gateway on each host
- It enables hosts to switch to a different default gateway if one goes down

//// AV Line

Datasheet | M4250 series

AV Line Managed Switches

Loopback interfaces are available as dynamic, stable IP addresses for other devices on the network, and for routing protocols

Support of Routing Information Protocol (RIPv2) as a distance vector protocol specified in RFC 2453 for IPv4

- Each route is characterized by the number of gateways, or hops, a packet must traverse to reach its intended destination.
- Categorized as an interior gateway protocol, RIP operates within the scope of an autonomous system

IP Multinetting allows to configure more than one IP address on a network interface (other vendors may call it IP Aliasing or Secondary Addressing)

ICMP Throttling feature adds configuration options for the transmission of various types of ICMP messages

- ICMP Redirects can be used by a malicious sender to perform man-in-the-middle attacks, or divert packets to a malicious monitor, or to cause Denial of Service (DoS) by blackholing the packets
- ICMP Echo Requests and other messages can be used to probe for vulnerable hosts or routers
- Rate limiting ICMP error messages protects the local router and the network from sending a large number of messages that take CPU and bandwidth
- The Policy Based Routing feature (PBR) overrides routing decision taken by the router and makes the packet to follow different actions based on a policy
- It provides freedom over packet routing/forwarding instead of leaving the control to standard routing protocols based on L3
- For instance, some organizations would like to dictate paths instead of following the paths shown by routing protocols
- Network Managers/Administrators can set up policies such as:
 - My network will not carry traffic from the Engineering department
 - Traffic originating within my network with the following characteristics will take path A, while other traffic will take path B
 - When load sharing needs to be done for the incoming traffic across multiple paths based on packet entities in the incoming traffic

Enterprise security

Traffic control MAC Filter and Port Security help restrict the traffic allowed into and out of specified ports or interfaces in the system in order to increase overall security and block MAC address flooding issues

DHCP Snooping monitors DHCP traffic between DHCP clients and DHCP servers to filter harmful DHCP message and builds a bindings database of (MAC address, IP address, VLAN ID, port) tuples that are considered authorized in order to prevent DHCP server spoofing attacks

IP source guard and Dynamic ARP Inspection use the DHCP snooping bindings database per port and per VLAN to drop incoming packets that do not match any binding and to enforce source IP/MAC addresses for malicious users traffic elimination

Time-based Layer 2 / Layer 3-v4 / Layer 4 Access Control Lists (ACLs) can be binded to ports, Layer 2 interfaces, VLANs and LAGs (Link Aggregation Groups or Port channel) for fast unauthorized data prevention and right granularity

For in-band switch management, management ACLs on CPU interface (Control Plane ACLs) are used to define the IP/MAC or protocol through which management access is allowed for increased HTTP/HTTPS or Telnet/SSH management security

Out-of-band management is available via dedicated service port (1G RJ45 OOB) when in-band management can be prohibited via management ACLs

Bridge protocol data unit (BPDU) Guard allows the network administrator to enforce the Spanning Tree (STP) domain borders and keep the active topology consistent and predictable - unauthorized devices or switches behind the edge ports that have BPDU enabled will not be able to influence the overall STP by creating loops

Spanning Tree Root Guard (STRG) enforces the Layer 2 network topology by preventing rogue root bridges potential issues when for instance, unauthorized or unexpected new equipment in the network may accidentally become a root bridge for a given VLAN

Dynamic 802.1x VLAN assignment mode, including Dynamic VLAN creation mode and Guest VLAN / Unauthenticated VLAN are supported for rigorous user and equipment RADIUS policy server enforcement Up to 48 clients (802.1x) per port are supported, including the authentication of the users domain, in order
to facilitate convergent deployments. For instance when IP phones connect PCs on their bridge, IP phones
and PCs can authenticate on the same switch port but under different VLAN assignment policies (Voice
VLAN versus other Production VLANs)

802.1x MAC Address Authentication Bypass (MAB) is a supplemental authentication mechanism that lets non-802.1x devices bypass the traditional 802.1x process altogether, letting them authenticate to the network using their client MAC address as an identifier

- A list of authorized MAC addresses of client NICs is maintained on the RADIUS server for MAB purpose
- MAB can be configured on a per-port basis on the switch
- MAB initiates after unsuccessful dot1x authentication process (configurable time out), when clients don't respond to any of EAPOL packets
- When 802.1X unaware clients try to connect, the switch sends the MAC address of each client to the authentication server
- The RADIUS server checks the MAC address of the client NIC against the list of authorized addresses
- $\bullet\,$ The RADIUS server returns the access policy and VLAN assignment to the switch for each client

//// AV Line

Datasheet | M4250 series

AV Line Managed Switches

With Successive Tiering, the Authentication Manager allows for authentication methods per port for a Tiered Authentication based on configured time-outs

- By default, configuration authentication methods are tried in this order: Dot1x, then MAB, then Captive Portal (web authentication)
- With BYOD, such Tiered Authentication is powerful and simple to implement with strict policies
 - For instance, when a client is connecting, M4300 tries to authenticate the user/client using the three
 methods above, the one after the other
- The admin can restrict the configuration such that no other method is allowed to follow the captive portal method, for instance

Double VLANs (DVLAN) pass traffic from one customer domain to another through the "metro core" in a multi-tenancy environment: customer VLAN IDs are preserved and a service provider VLAN ID is added to the traffic can pass the metro core in a simple, secure manner

Private VLANs (with Primary VLAN, Isolated VLAN, Community VLAN, Promiscuous port, Host port, Trunks) provide Layer 2 isolation between ports that share the same broadcast domain, allowing a VLAN broadcast domain to be partitioned into smaller point-to-multipoint subdomains accross switches in the same Layer 2 network

- Private VLANs are useful in DMZ when servers are not supposed to communicate with each other but need to communicate with a router
- They remove the need for more complex port-based VLANs with respective IP interface/subnets and associated L3 routing
- Another Private VLANs typical application are carrier-class deployments when users shouldn't see, snoop or attack other users' traffic

SSL version 3 and TLS version 2 ensure Web GUI sessions are secured

Secure Shell (SSH version 2) and SNMPv3 (with or without MD5 or SHA authentication) ensure SNMP and Telnet sessions are secured

2048-bit RSA key pairs, SHA2-256 and SHA2-512 cryptographic hash functions for SSLv3 and SSHv2 are supported on all M4300 models

TACACS+ and RADIUS enhanced administrator management provides strict "Login" and "Enable" authentication enforcement for the switch configuration, based on latest industry standards: exec authorization using TACACS+ or RADIUS; command authorization using TACACS+ and RADIUS Server; user exec accounting for HTTP and HTTPS using TACACS+ or RADIUS; and authentication based on user domain in addition to user ID and password

Superior quality of service

Advanced classifier-based hardware implementation for Layer 2 (MAC), Layer 3 (IP) and Layer 4 (UDP/TCP transport ports) prioritization

8 queues (7 in a stack) for priorities and various QoS policies based on 802.1p (CoS) and DiffServ can be applied to interfaces and VLANs

Advanced rate limiting down to 1 Kbps granularity and mininum-guaranteed bandwidth can be associated with ACLs for best granularity

Single Rate Policing feature enables support for Single Rate Policer as defined by RFC 2697

- Committed Information Rate (average allowable rate for the class)
- Committed Burst Size (maximum amount of contiguous packets for the class)
- Excessive Burst Size (additional burst size for the class with credits refill at a slower rate than committed burst size)
- DiffServ feature applied to class maps

Automatic Voice over IP prioritization with protocol-based (SIP, H323 and SCCP) or OUI-based Auto-VoIP up to 144 simultaneous voice calls

Flow Control

802.3x Flow Control implementation per IEEE 802.3 Annex 31B specifications with Symmetric flow control, Asymmetric flow control or No flow control

- Asymmetric flow control allows the switch to respond to received PAUSE frames, but the ports cannot generate PAUSE frames
- Symmetric flow control allows the switch to both respond to, and generate MAC control PAUSE frames

Allows traffic from one device to be throttled for a specified period of time: a device that wishes to inhibit transmission of data frames from another device on the LAN transmits a PAUSE frame

• A device that wishes to inhibit transmission of data frames from another device on the LAN transmits a PAUSE frame

UDLD Support


UDLD implementation detects unidirectional links physical ports (UDLD must be enabled on both sides of the link in order to detect an unidirectional link)

- UDLD protocol operates by exchanging packets containing information about neighboring devices
- The purpose is to detect and avoid unidirectional link forwarding anomalies in a Layer 2 communication channel

Both "normal-mode" and "aggressive-mode" are supported for perfect compatibility with other vendors implementations, including port "D-Disable" triggering cases in both modes

//// AV Line

Target Application

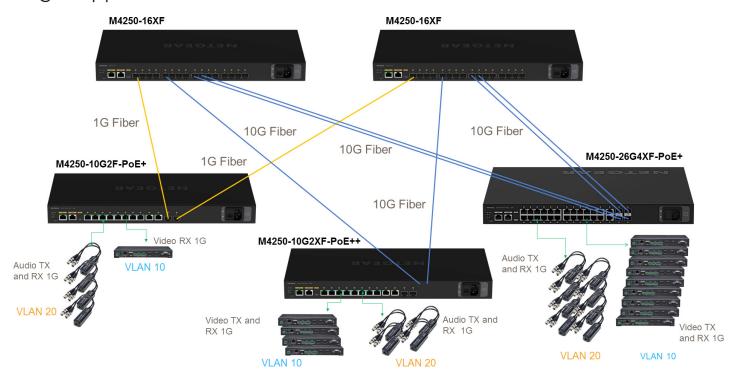

A new AV Line of M4250 switches with out-of-the-box functionality and an industry-first: a concurrent second user interface solely designed with the AV Pro in mind.

NETGEAR has enhanced the experience for AV professionals by including a new user interface designed from the ground up. Pro AV customers don't have to settle for an IT-centric interface with settings and IT-specific functionality they will never need. The new M4250 AV interface presents the common AV controls right up front with user-selectable profiles for common AV platforms making it a snap to ensure the settings are correct for a specific audio or video application.


When each M4250 is simply configured with AV profiles on certain ports, the AV Line offers automatic and dynamic configuration of multiple M4250 switches connected together. This automatic configuration, known as Auto-LAG and Auto-Trunk, combined with as NETGEAR IGMP Plus™, make setting up a complicated AV over IP network easier and quicker than ever before.



//// AV Line

Components and Modules

M4250 AV Licenses

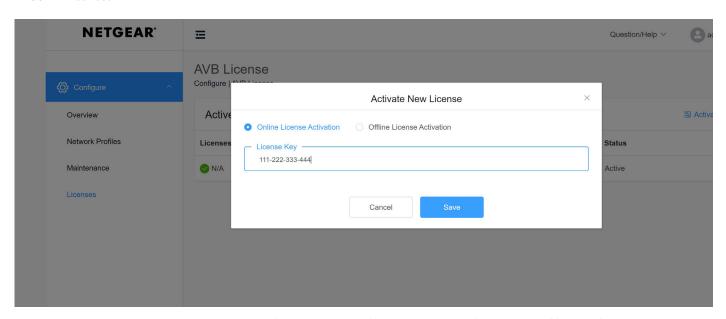

M4250 AVB Licenses are electronic SKUs. A license registration key is received by email and can be copied and pasted directly in the AV UI when the switch is online.









//// AV Line

Components and Modules

M4250-10G2F-PoE+ **AV Line Managed Switch**

- Americas: GSM4212P-100NAS
- Europe: GSM4212P-100EUS
- Asia Pacific: GSM4212P-100AJS
- China: GSM4212P-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4212P-10000S (sold separatel

- 8-port 10/100/1000BASE-T (RJ45) PoE+ with 125W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 2-port 1000BASE-X (SFP)
- 24 Gbps non-blocking fabric across 12 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 200 x 43.2 mm
- Weight: 2.85Kg (6.28lb)



//// AV Line

Components and Modules

M4250-10G2XF-PoE+ **AV Line Managed Switch**

- Americas: GSM4212PX-100NAS
- Europe: GSM4212PX-100EUS
- Asia Pacific: GSM4212PX-100AJS
- China: GSM4212PX-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4212PX-10000S (sold separately)

- 8-port 10/100/1000BASE-T (RJ45) PoE+ with 240W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 2-port 1000/10GBASE-X (SFP+)
- 60 Gbps non-blocking fabric across 12 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 200 x 43.2 mm
- Weight: 2.9Kg (6.39lb)



//// AV Line

Components and Modules

M4250-10G2XF-PoE++ **AV Line Managed Switch**

- Americas: GSM4212UX-100NAS
- Europe: GSM4212UX-100EUS
- Asia Pacific: GSM4212UX-100AJS
- China: GSM4212UX-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4212UX-10000S (sold separately)

- 8-port 10/100/1000BASE-T (RJ45) Ultra90 PoE++ with 720W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 2-port 1000/10GBASE-X (SFP+)
- Compatible 802.3af (15.4W), 802.3at (30W), 802.3bt (60, 75 and 90W)
- 60 Gbps non-blocking fabric across 12 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 257 x 43.2 mm
- Weight: 3.83Kg (8.44lb)



//// AV Line

Components and Modules

M4250-12M2XF

AV Line Managed Switch

- Americas: MSM4214X-100NAS
- Europe: MSM4214X-100EUS
- Asia Pacific: MSM4214X-100AJS
- China: MSM4214X-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4214X-10000S (sold separately)

- 12-port 100/1000/2.5GBASE-T (RJ45)
- 2-port 1000/10GBASE-X (SFP+)
- 100 Gbps non-blocking fabric across 14 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 100 x 43.2 mm
- Weight: 1.74Kg (3.85lb)



//// AV Line

Components and Modules

M4250-16XF

AV Line Managed Switch

- Americas: XSM4216F-100NAS
- Europe: XSM4216F-100EUS
- Asia Pacific: XSM4216F-100AJS
- China: XSM4216F-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4216F-10000S (sold separately)

- 16-port 10GBASE-X (SFP+)
- The first 12 ports support 1000BASE-X (1G) SFP modules
- 320 Gbps non-blocking fabric across 16 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 200 x 43.2 mm
- Weight: 1.74Kg (3.85lb)



//// AV Line

Components and Modules

M4250-26G4F-PoE+ **AV Line Managed Switch**

- Americas: GSM4230P-100NAS
- Europe: GSM4230P-100EUS
- Asia Pacific: GSM4230P-100AJS
- China: GSM4230P-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4230P-10000S (sold separately)

- 24-port 10/100/1000BASE-T (RJ45) PoE+ with 300W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 4-port 1000BASE-X (SFP)
- 60 Gbps non-blocking fabric across 30 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 43.2 x 257 mm
- Weight: 4.30Kg (9.47lb)



//// AV Line

Components and Modules

M4250-26G4F-PoE++ AV Line Managed Switch

- Americas: GSM4230UP-100NAS
- Europe: GSM4230UP-100EUS
- Asia Pacific: GSM4230UP-100AJS
- China: GSM4230UP-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4230UP-10000S (sold separately)

- 24-port 10/100/1000BASE-T (RJ45) Ultra90 PoE++ with 1,440W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 4-port 1000BASE-X (SFP)
- Compatible 802.3af (15.4W), 802.3at (30W), 802.3bt (60, 75 and 90W)
- 2 internal, fixed PSUs (C14 inlets) with embedded RPS/EPS function
- When one PSU is used, PoE budget is 720W
- When two PSU are used, PoE budget is 1,440W
- 60 Gbps non-blocking fabric across 30 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for quiet or cool operation
- Dimensions (WxDxH): 440 x 43.2 x 400 mm
- Weight: 6.75Kg (14.87lb)



//// AV Line

Components and Modules

M4250-26G4XF-PoE+ **AV Line Managed Switch**

- Americas: GSM4230PX-100NAS
- Europe: GSM4230PX-100EUS
- Asia Pacific: GSM4230PX-100AJS
- China: GSM4230PX-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4230PX-10000S (sold separately)

- 24-port 10/100/1000BASE-T (RJ45) PoE+ with 480W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 4-port 1000/10GBASE-X (SFP+)
- 132 Gbps non-blocking fabric across 30 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 43.2 x 400 mm
- Weight: 5.45Kg (12.02lb)



AV Line

Components and Modules

M4250-40G8F-PoE+ **AV Line Managed Switch**

- Americas: GSM4248P-100NAS
- Europe: GSM4248P-100EUS
- Asia Pacific: GSM4248P-100AJS
- China: GSM4248P-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4248P-10000S (sold separately)

- 40-port 10/100/1000BASE-T (RJ45) PoE+ with 480W PoE budget
- 8-port 1000BASE-X (SFP)
- 96 Gbps non-blocking fabric across 48 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 43.2 x 400 mm
- Weight: 5.85Kg (12.90lb)



AV Line

Components and Modules

M4250-40G8XF-PoE+ **AV Line Managed Switch**

- Americas: GSM4248PX-100NAS
- Europe: GSM4248PX-100EUS
- Asia Pacific: GSM4248PX-100AJS
- China: GSM4248PX-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4248PX-10000S (sold separately)

- 40-port 10/100/1000BASE-T (RJ45) PoE+ with 960W PoE budget
- 8-port 1000/10GBASE-X (SFP+)
- 240 Gbps non-blocking fabric across 48 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for quiet or cool operation
- Dimensions (WxDxH): 440 x 43.2 x 400 mm
- Weight: 6.31Kg (13.91lb)



//// AV Line

Components and Modules

M4250-40G8XF-PoE++ **AV Line Managed Switch**

- Americas: GSM4248UX-100NAS
- Europe: GSM4248UX-100EUS
- Asia Pacific: GSM4248UX-100AJS
- China: GSM4248UX-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4248UX-10000S (sold separately)

- 40-port 10/100/1000BASE-T (RJ45) Ultra90 PoE++ with 2,880W PoE budget
- 8-port 1000/10GBASE-X (SFP+)
- Compatible 802.3af (15.4W), 802.3at (30W), 802.3bt (60, 75 and 90W)
- 3 internal, fixed PSUs (C14 inlets) with embedded RPS/EPS function
- When one PSU is used, PoE budget is 720W
- When two PSU are used, PoE budget is 1,650W
- When three PSU are used, PoE budget is 2,880W
- 240 Gbps non-blocking fabric across 48 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for quiet or cool operation
- Dimensions (WxDxH): 440 x 86.4 x 350 mm (2U)



//// AV Line

GBIC SFP and SFP+ Optics for M4250 series

Ordering information · Worldwide: see table below	Multimo (MI	Single mode Fiber (SMF)	
Warranty: 5 years	OM1 or OM2 62.5/125µm	OM3 or OM4 50/125µm	9/125µm
10 Gigabit SFP+	AXM763	AXM763	AXM762
	10GBase-LRM long reach multimode 802.3aq - LC duplex connector	10GBase-LRM long reach multimode 802.3aq - LC duplex connector	10GBase-LR long reach single mode LC duplex connector
	up to 100m (328 ft)	up to 165m (541 ft)	up to 10km (6.2 miles)
	AXM763-10000S (1 unit)	AXM763-10000S (1 unit)	AXM762-10000S (1 unit) AXM762P10-10000S (pack of 10 units)
• Fits into M4250 SFP+		AXM761	AXM764
interfaces		10GBase-SR short reach multimode LC duplex connector	10GBase-LR LITE single mode LC duplex connector
		up to 300m (984 ft)	up to 2km (1.2 mile)
		AXM761-10000S (1 unit) AXM761P10-10000S (pack of 10 units)	AXM764-10000S (1 unit)
• Fits into M4250 SFP+ and SFP interfaces • M4250-16XF (XSM4216F) supports 1G modules on ports 1-12 only	AGM731F 1000Base-SX short range multimode LC duplex connector up to 275m (902 ft) AGM731F (1 unit)	AGM731F 1000Base-SX short range multimode LC duplex connector OM3: up to 550m (1,804 ft) OM4: up to 1,000m (3,280 ft) AGM731F (1 unit)	AGM732F 1000Base-LX long range single mode LC duplex connector up to 10km (6.2 miles) AGM732F (1 unit)

AGM734 1000BASE-T RJ45 SFP (Gigabit)

Ordering information

• Worldwide: AGM734-10000S

• Warranty: 5 years



- Fits into M4250 SFP+ and SFP interfaces
- 1 port Gigabit RJ45
- Supports only 1000Mbps full-duplex mode
- Up to 100m (328 ft) with Cat5 RJ45 or better
- Conveniently adds 1G copper connectivity to M4250 fiber interfaces
- M4250-16XF (XSM4216F) supports AGM734 on its ports 1 to 12 only

AXM765 10GBASE-T RJ45 SFP+ (10 Gigabit)

- Worldwide: AXM765-20000S
- Warranty: 5 years



- Fits into M4250 SFP+ interfaces
- 1 port 10GBASE-T RJ45
- Copper connectivity up to 80m (262 ft) distance
- CAT6a or better wiring required for 10GBASE-T up to 80 meters
- Conveniently adds 10G copper connectivity to M4250 fiber interfaces

AV Line

Direct Attach Cables for M4250 series

Ordering information		SFP+ to SFP+	
Worldwide: see table belowWarranty: 5 years	1 meter (3.3 ft)	3 meters (9.8 ft)	5 meters (16.4 ft)
10 Gigabit DAC	AXC761 10GSFP+ Cu (passive) SFP+ connectors	AXC763 10GSFP+ Cu (passive) SFP+ connectors	AXC765 10GSFP+ Cu (active) SFP+ connectors
	AXC761-10000S (1 unit)	AXC763-10000S (1 unit)	AXC765-10000S (1 unit)
	7 meters (23.0 ft)	10 meters (32.8 ft)	15 meters (49.2 ft)
	AXC767 10GSFP+ Cu (active) SFP+ connectors	AXC7610 10GSFP+ Cu (active) SFP+ connectors	AXC7615 10GSFP+ (duplex fiber optic) SFP+ connectors
	AXC767-10000S (1 unit)	AXC7610-10000S (1 unit)	AXC7615-10000S (1 unit)
	20 meters (65.6 ft)		
	AXC7620 10GSFP+ (duplex fiber optic) SFP+ connectors AXC7620-10000S (1 unit)		
• Fits into M4250 SFP+ interfaces			

AV Line

Technical Specifications

Requirements based on 13.0.2 software release



Model Name	Description	Model number
M4250-10G2F-PoE+	AV Line 8x1G PoE+ 125W 2x1G and 2xSFP Managed Switch	GSM4212P
M4250-10G2XF-PoE+	AV Line 8x1G PoE+ 240W 2x1G and 2xSFP+ Managed Switch	GSM4212PX
M4250-10G2XF-PoE++	AV Line 8x1G Ultra90 PoE++ 720W 2x1G and 2xSFP+ Managed Switch	GSM4212UX
M4250-26G4F-PoE+	AV Line 24x1G PoE+ 300W 2x1G and 4xSFP Managed Switch	GSM4230P
M4250-26G4F-PoE++	AV Line 24x1G Ultra90 PoE++ 1,440W 2x1G and 4xSFP Managed Switch	GSM4230UP
M4250-26G4XF-PoE+	AV Line 24x1G PoE+ 480W 2x1G and 4xSFP+ Managed Switch	GSM4230PX
M4250-40G8F-PoE+	AV Line 40x1G PoE+ 480W and 8xSFP Managed Switch	GSM4248P
M4250-40G8XF-PoE+	AV Line 40x1G PoE+ 960W and 8xSFP+ Managed Switch	GSM4248PX
M4250-40G8XF-PoE++	AV Line 40x1G Ultra90 PoE++ 2,880W and 8xSFP+ Managed Switch	GSM4248UX
M4250-12M2XF	AV Line 12x2.5G and 2xSFP+ Managed Switch	MSM4214X
M4250-16XF	AV Line 12x1G/10G SFP+ and 4x10G SFP+ Managed Switch	XSM4216F

Physical Interfaces					
Gigabit and 10 Gigabit Ethernet Ports	Auto-sensing RJ45 PoE 10/100/1000BASE-T	Auto-sensing RJ45 10/100/1000BASE-T	Auto-sensing RJ45 100/1000/2.5GBASE-T	Auto-sensing SFP 1000BASE-X	Auto-sensing SFP+ 1000/10GBASE-X
M4250-10G2F-PoE+	8 ports PoE+ (125W)	2	=	2	-
M4250-10G2XF-PoE+	8 ports PoE+ (240W)	2	-	-	2
M4250-10G2XF-PoE++	8 ports Ultra90 PoE++ (720W)	2	-	-	2
M4250-26G4F-PoE+	24 ports PoE+ (300W)	2	-	4	-
M4250-26G4F-PoE++	24 ports Ultra90 PoE++ (1,440W)	2	-	4	=
M4250-26G4XF-PoE+	24 ports PoE+ (480W)	2	=	=	4
M4250-40G8F-PoE+	40 ports PoE+ (480W)	-	-	8	=
M4250-40G8XF-PoE+	40 ports PoE+ (960W)	-	-	-	8
M4250-40G8XF-PoE++	40 ports Ultra90 PoE++ (2,880W)	-	-	-	8
M4250-12M2XF	-	-	12	-	2
M4250-16XF	-	-	-	-	16 (only Ports 1-12 support 1G)

Total Usable Port Count	1G Ports	2.5G Ports	10G Ports
M4250-10G2F-PoE+	12	-	-
M4250-10G2XF-PoE+	10	-	2
M4250-10G2XF-PoE++	10	-	2
M4250-26G4F-PoE+	30	-	-
M4250-26G4F-PoE++	30	=	=
M4250-26G4XF-PoE+	26	-	4
M4250-40G8F-PoE+	48	=	=
M4250-40G8XF-PoE+	40	-	8
M4250-40G8XF-PoE++	40	-	8
M4250-12M2XF	=	12	2
M4250-16XF	-	=	16

/// AV Line

Management Ports	Console ports		Service port (Out-of-band	Ethernet)	Storage port
All models	Serial RS232 RJ45 (rear); USB-C (re	ar)	1 x RJ45 10/100/1000BASI	E-T (rear)	1 x USB-A (front)
Fixed Power Supplies					
M4250-26G4F-PoE++	2 internal PSU (C14 inlets) with 1 or	n/off switch			
M4250-40G8XF-PoE++	3 internal PSU (C14 inlets) with 1 or	n/off switch			
All other models	1 internal PSU (C14 inlet) with 1 on	off switch			
Fixed fans					
All models	Side-to-side airflow				
Power over Ethernet					
PSE Capacity	PoE+ Ports (802.3at)	Ultra90 PoE+-	+ Ports (802.3bt)		
M4250-10G2F-PoE+	8		-	Ultra90 PoE++ 802.3bt i	
M4250-10G2XF-PoE+	8		-	802.3af PoE (15.4W), 80 and 802.3bt (60W, 75W	
M4250-10G2XF-PoE++	-		8	and 602.5bt (6000, 7500	and 70vv).
M4250-26G4F-PoE+	24		-		
M4250-26G4F-PoE++	-		24		
M4250-26G4XF-PoE+	24		-		
M4250-40G8F-PoE+	40		-		
M4250-40G8XF-PoE+	40		-		
M4250-40G8XF-PoE++	-		40		
PoE Budget	PoE B	udget @ 110V AC	in		
M4250-10G2F-PoE+		125 Watts			
M4250-10G2XF-PoE+		240 Watts			
M4250-10G2XF-PoE++		720 Watts			
M4250-26G4F-PoE+		300 Watts			
M4250-26G4F-PoE++	1 I DCII. 720)		1. 1. 4.40 \\/		
	1 used F30. 720	Watts / 2 used PSU	J. 1,440 Walls		
M4250-26G4XF-PoE+		480 Watts			
M4250-40G8F-PoE+		480 Watts			
M4250-40G8XF-PoE+		960 Watts			
M4250-40G8XF-PoE++	1 used PSU: 720Watts / 2 used		s / 3 used PSU: 2,880 Watts		
Features Support	M4250-10G2F-PoE+/M4250 M4250-26G4F-PoE+/M4250 M4250-40G8F-PoE+/M4250-4)-26G4XF-PoE+	M4250-10G2XF-PoE++/ M4250-40G8		
IEEE 802.3af (up to 15.4W per port)	Yes		Yes		
IEEE 802.3at (up to 30W per port)	Yes		Yes		
IEEE 802.3bt (up to 90W per port)	No		Yes	3	
IEEE 802.3at Layer 2 (LLDP) method	Yes		Yes	3	
IEEE 802.3at 2-event classification	Yes		Yes		
IEEE 802.3bt Layer 2 (LLDP) method	No		Yes		
•					
IEEE 802.3bt auto-classification metho			Yes		
Pre-802.3bt standard method	No		Yes		
PoE timer / schedule (week, days, hou	urs) Yes		Yes	3	
Processor/Memory					
CPU					
M4250-26G4F-PoE+, M4250-26G4F- 26G4XF-PoE+, M4250-40G8F-PoE+, PoE+, M4250-40G8XF-PoE++		Quad-Core Cortex	x-A57 ARMv8 1.8Ghz CPU (6	4-bit)	
	Integrated	ΔRM Δ9 1 25Ghz (CPU in switching silicon (32-b	it)	
All other models	integrated /	11(11) (7 1.200112 0			
All other models System memory (RAM) - all models	2 GB	1111717 1.25 6112 6			

AV Line Managed Switches

/// AV Line

Packet Buffer Memory		
M4250-40G8F-PoE+, M4250-40G8XF-PoE+, M4250- 40G8XF-PoE++	32 Mb	Dynamically shared across only used ports
All other models	16 Mb	
Performance Summary		
Switching fabric		
M4250-10G2F-PoE+	24 Gbps	
M4250-10G2XF-PoE+, M4250-10G2XF-PoE++	60 Gbps	
M4250-26G4F-PoE+, M4250-26G4F-PoE++	60 Gbps	
M4250-40G8F-PoE+	96 Gbps	lian anta /a an lala alian a falasia)
M4250-12M2XF	100 Gbps	Line-rate (non blocking fabric)
M4250-26G4XF-PoE+	132 Gbps	
M4250-40G8XF-PoE+, M4250-40G8XF-PoE++	240 Gbps	
M4250-16XF	320 Gbps	
Throughput (64-byte frames)		
M4250-10G2F-PoE+	17.86 Mpps	
M4250-10G2XF-PoE+, M4250-10G2XF-PoE++	44.64 Mpps	
M4250-26G4F-PoE+, M4250-26G4F-PoE++	44.64 Mpps	
M4250-40G8F-PoE+	71.42 Mpps	
M4250-12M2XF	74.40 Mpps	
M4250-26G4XF-PoE+	98.21 Mpps	
M4250-40G8XF-PoE+, M4250-40G8XF-PoE++	178.56 Mpps	
M4250-16XF	238.08 Mpps	

Latency - 10G Fiber	64-byte frames	512-byte frames	1024-byte frames	1518-byte frames
M4250-10G2F-PoE+	-	-	-	-
M4250-10G2XF-PoE+	0.838µs	0.821µs	0.820µs	0.819µs
M4250-10G2XF-PoE++	0.807µs	0.791µs	0.790µs	0.789µs
M4250-26G4F-PoE+	-	-	-	-
M4250-26G4F-PoE++	-	-	-	-
M4250-26G4XF-PoE+	0.834µs	0.818µs	0.817µs	0.816µs
M4250-40G8F-PoE+	-	-	-	=
M4250-40G8XF-PoE+	0.709µs	0.717µs	0.730µs	0.714µs
M4250-40G8XF-PoE++	0.708µs	0.716µs	0.728µs	0.713µs
M4250-12M2XF	0.807µs	0.791µs	0.790µs	0.789µs
M4250-16XF	0.811µs	0.834µs	0.860µs	0.831µs

Energy Efficient Ethernet (EEE)

Datasheet | M4250 series AV Line Managed Switches

AV Line

Latency - 1G Fiber	64-byte frames	512-byte frames	1024-byte frames	1518-byte frames
M4250-10G2F-PoE+	2.271µs	2.257µs	2.267µs	2.266µs
M4250-10G2XF-PoE+	1.169µs	1.174µs	1.159µs	1.154µs
M4250-10G2XF-PoE++	1.148µs	1.141µs	1.137µs	1.156µs
M4250-26G4F-PoE+	1.164µs	1.129µs	1.124µs	1.146µs
M4250-26G4F-PoE++	1.141µs	1.126µs	1.119µs	1.140µs
M4250-26G4XF-PoE+	1.130µs	1.123µs	1.119µs	1.120µs
M4250-40G8F-PoE+	1.074µs	1.109µs	1.106µs	1.102µs
M4250-40G8XF-PoE+	1.106µs	1.120µs	1.107µs	1.128µs
M4250-40G8XF-PoE++	1.084µs	1.103µs	1.098µs	1.115µs
M4250-12M2XF	1.186µs	1.178µs	1.156µs	1.173µs
M4250-16XF	1.274µs	1.292µs	1.291µs	1.297µs
Latency - 1G Copper	64-byte frames	512-byte frames	1024-byte frames	1518-byte frames
M4250-10G2F-PoE+	2.133µs	2.136µs	2.131µs	2.142µs
M4250-10G2XF-PoE+	2.140µs	2.140µs	2.137µs	2.144µs
M4250-10G2XF-PoE++	1.837µs	1.829µs	1.828µs	1.826µs
M4250-26G4F-PoE+	2.146µs	2.148µs	2.140µs	2.150µs
M4250-26G4F-PoE++	2.139µs	2.140µs	2.133µs	2.146µs
M4250-26G4XF-PoE+	2.280µs	2.282µs	2.270µs	2.288µs
M4250-40G8F-PoE+	2.027µs	2.343µs	2.462µs	2.358µs
M4250-40G8XF-PoE+	2.220µs	2.595µs	2.744µs	2.613µs
M4250-40G8XF-PoE++	2.251µs	2.625μs	2.775µs	2.641µs
M4250-12M2XF	2.843µs	2.836μs	2.834µs	2.836µs
M4250-16XF	-	-	-	-
Latency - 2.5G Copper	64-byte frames	512-byte frames	1024-byte frames	1518-byte frames
M4250-10G2F-PoE+	-	-	-	-
M4250-10G2XF-PoE+	-	-	-	-
M4250-10G2XF-PoE++	-	-	-	-
M4250-26G4F-PoE+	-	-	-	-
M4250-26G4F-PoE++	-	-	-	-
M4250-26G4XF-PoE+	-	-	-	-
M4250-40G8F-PoE+	-	-	-	-
M4250-40G8XF-PoE+	-	-	-	-
M4250-40G8XF-PoE++	-	-	-	-
M4250-12M2XF	6.013µs	6.014µs	6.012µs	6.016µs
M4250-16XF	-	-	-	-
Green Ethernet				

Compliant with IEEE 802.3az Energy Efficient Ethernet Task Force

Deactivated by default

AV Line Managed Switches

/// AV Line

Other Metrics					
Forwarding mode	Ç	Store-and-forward			
Addressing	2	48-bit MAC address			
Address database size	1	16K MAC addresses			
Number of VLANs	2	4,093 VLANs (802.1Q) simultan	eously		
Number of multicast groups filtered (IGMP)		4K total (2,048 IPv4 and 2,048 IF	Pv6)		
Number of Link Aggregation Groups	s (LAGs)	8 LAGs with up to 8 ports per gr	roup 802.3ad / 802	2.1AX-2008	
Number of hardware queues for Qo	oS 8	8 queues			
Number of routes IPv4 IPv6		894 IPv4 Unicast Routes in Default I 126 IPv6 Unicast Routes in Default I	'	SDM (System Data Mar database) templates all resources distribution of IPv6 applications	ow for granular systen
Number of static routes IPv4 IPv6		64 64			
RIP application route scaling IPv4	5	32 in Default IPv4 Basic SDM Te	emplate		
Number of IP interfaces (port or VLA	AN) 1	128			
Jumbo frame support	l	up to 12KB packet size			
Acoustic noise	@	@ 25°C ambient (77°F)			
Testing method		Following the ISO-7779 standard		ber Temp 25°C during tes	sting unless noted
SPL (Sound Pressure Level)		dBA values are SPL (Sound Pressure Level) values, testing following the ISO-7779 standard			
Fan management		hree modes are configurable u node	using the AV GUI or the CL	l: Fan Off mode, Quiet mo	ode (default), and Coc
Fan Off mode @ 25° C ambient (77° F) Maximum Conditions:	PoE Power Load	Internal Sensors	Case Temperature (Top)	Fan Duty	A CONTRACT
M4250-10G2F-PoE+	80W (all ports can be				Acoustic Noise
	used)	<= 42°C	41.8°C	0	OdBA
M4250-10G2XF-PoE+	used) 90W(all ports can be used)	<= 42°C <= 44°C	41.8°C 39.6°C	0	
M4250-10G2XF-PoE+ M4250-10G2XF-PoE++	90W (all ports can be				0dBA
	90W(all ports can be used) 45W(all ports can be	<= 44°C	39.6°C	0	0dBA 0dBA
M4250-10G2XF-PoE++	90W (all ports can be used) 45W (all ports can be used)	<= 44°C <= 67°C	39.6°C 44.6°C	0	OdBA OdBA
M4250-10G2XF-PoE++ M4250-26G4F-PoE+	90W(all ports can be used) 45W(all ports can be used) 45W (no SFP)	<= 44°C <= 67°C S1<= 43°C S2<= 47°C	39.6°C 44.6°C 40.5°C	0 0	OdBA OdBA OdBA
M4250-10G2XF-PoE++ M4250-26G4F-PoE++	90W (all ports can be used) 45W (all ports can be used) 45W (no SFP) Not Supported 45W(8 ports PoE+, no	<= 44°C <= 67°C S1<= 43°C S2<= 47°C Not Supported	39.6°C 44.6°C 40.5°C Not Supported	0 0 0 Not Supported	0dBA 0dBA 0dBA 0dBA Not Supported
M4250-10G2XF-PoE++ M4250-26G4F-PoE+ M4250-26G4F-PoE++ M4250-26G4XF-PoE+	90W(all ports can be used) 45W(all ports can be used) 45W (no SFP) Not Supported 45W(8 ports PoE+, no SFP+) 30W(8 ports PoE+, no	<= 44°C <= 67°C S1<= 43°C S2<= 47°C Not Supported S1<= 41°C S2<= 46°C	39.6°C 44.6°C 40.5°C Not Supported 43.4°C	0 0 0 Not Supported 0	0dBA 0dBA 0dBA 0dBA Not Supported 0dBA
M4250-10G2XF-PoE++ M4250-26G4F-PoE+ M4250-26G4F-PoE++ M4250-26G4XF-PoE+ M4250-40G8F-PoE+	90W(all ports can be used) 45W(all ports can be used) 45W (no SFP) Not Supported 45W(8 ports PoE+, no SFP+) 30W(8 ports PoE+, no SFP)	<= 44°C <= 67°C S1<= 43°C S2<= 47°C Not Supported S1<= 41°C S2<= 46°C S1<= 37°C S2<= 50°C	39.6°C 44.6°C 40.5°C Not Supported 43.4°C 45.2°C	0 0 0 Not Supported 0	OdBA OdBA OdBA OdBA Not Supported OdBA OdBA
M4250-10G2XF-PoE++ M4250-26G4F-PoE+ M4250-26G4F-PoE++ M4250-26G4XF-PoE+ M4250-40G8F-PoE+	90W(all ports can be used) 45W(all ports can be used) 45W (no SFP) Not Supported 45W(8 ports PoE+, no SFP+) 30W(8 ports PoE+, no SFP) Not Supported	<= 44°C <= 67°C S1<= 43°C S2<= 47°C Not Supported S1<= 41°C S2<= 46°C S1<= 37°C S2<= 50°C Not Supported Not Supported	39.6°C 44.6°C 40.5°C Not Supported 43.4°C 45.2°C Not Supported	0 0 0 Not Supported 0 0 Not Supported	0dBA 0dBA 0dBA 0dBA Not Supported 0dBA 0dBA Not Supported

AV Line Managed Switches

//// AV Line

Quiet mode @ 25° C ambient Conditions: (77° F)	PoE Power Load	Internal Sensors	Case Temperature (Top)	Fan Duty	Acoustic Noise
M4250-10G2F-PoE+	0-125W	<= 36°C	35.9°C	25	27.38dBA
M4250-10G2XF-PoE+	0-240W	<= 37°C	40.6°C	25	27.4dBA
M4250-10G2XF-PoE++	0-250W	<= 49°C	42.9°C	25	34.57dBA
	250-380W	<= 49°C	43.3°C	30	40dBA
	380-500W	<= 49°C	44.9°C	35	44.22dBA
	500-720W	<= 49°C	52.1°C	40	47.19dBA
M4250-26G4F-PoE+	0-200W	S1<= 43°C S2<=47°C	43.5°C	25	28dBA
	200W-300W	S1<= 44°C S2<=48°C	51.3°C	30	34dBA
M4250-26G4F-PoE++	0-280W	S1<= 37°C S2<=39°C	52.9°C	20	28dBA
	280W-360W	S1<= 38°C S2<=40°C	57.4°C	25	36dBA
	360W-420W	S1<= 39°C S2<=41°C	54.4°C	30	41dBA
	420W-480W	S1<= 40°C S2<=42°C	53.3°C	35	47dBA
	480W-540W	S1<= 41°C S2<=43°C	52.3°C	40	50dBA
	540W-600W	S1<= 42°C S2<=44°C	54.4°C	45	54dBA
	600W-660W	S1<= 43°C S2<=45°C	53.6°C	50	57dBA
	660W-1,440W	S1<= 44°C S2<=46°C	55.7°C	55	60dBA
M4250-26G4XF-PoE+	0-350W	S1<= 41°C S2<=46°C	39.3°C	20	25dBA
	350W-480W	S1<= 42°C S2<=47°C	36.8°C	30	42dBA
M4250-40G8F-PoE+	0-150W	S1<= 37°C S2<=50°C	43.1°C	20	30dBA
	150W-200W	S1<= 38°C	42.1°C	25	36dBA
	200W-340W	S1<= 39°C S2<=51°C	44°C	30	40dBA
	340W-480W	S1<= 40°C	47.6°C	35	47dBA
M4250-40G8XF-PoE+	0-400W	S1<= 33°C S2<=46°C	54.2°C	20	29dBA
	400W-480W	S1<= 34°C S2<=47°C	42.8°C	25	35dBA
	480W-560W	S1<= 35°C S2<=48°C	41.9°C	30	41dBA
	560W-640W	S1<= 36°C S2<=49°C	42.1°C	35	48dBA
	640W-720W	S1<= 37°C S2<=50°C	40.9°C	40	51dBA
	720W-800W	S1<= 38°C S2<=51°C	40.7°C	45	54dBA
	800W-880W	S1<= 39°C S2<=52°C	40.4°C	50	57dBA
	880W-960W	S1<= 40°C S2<=53°C	40.5°C	55	59dBA
M4250-40G8XF-PoE++	0-160W	S1<= 37°C S2<=49°C	41.3°C	20	30dBA
	160W-240W	S1<= 38°C	38.8°C	25	36dBA
	240W-320W	S1<= 39°C S2<=50°C	36.4°C	30	42dBA
	320W-400W	S1<= 40°C	35.3℃	35	49dBA
	400W-480W	S1<= 41°C S2<=51°C	34.4°C	40	51dBA
	480W-560W	S1<= 42°C	34.3°C	45	55dBA
	560W-640W	S1<= 43°C S2<=52°C	35.1℃	50	57dBA
	660W-2,880W	S1<= 44°C	36.5°C	55	60dBA
M4250-12M2XF	-	<= 58°C	53.5°C	25	28.5dBA
M4250-16XF		<= 67°C	41.6°C	25	27.44dBA

/// AV Line

Datasheet | M4250 series

Cool mode @				
25 °C ambient (77 °F)	Case Temperature (Top)		n Duty	Acoustic Noise
M4250-10G2F-PoE+	27.2°C		100	55dBA
M4250-10G2XF-PoE+	30.9°C		100	56dBA
M4250-10G2XF-PoE++ M4250-26G4F-PoE+	41.8°C 36.7°C		100	66.23dBA 57dBA
M4250-26G4F-PoE++	(720W PoE) 36.7°C (1,440W PoE)		100	69dBA
M4250-26G4XF-PoE+	32.3°C		100	67dBA
M4250-40G8F-PoE+	35.4°C		100 66	
M4250-40G8XF-PoE+	36.1°C		100	69dBA
M4250-40G8XF-PoE++	(720W PoE) 31.4°C (1,650W PoE) (2,880W PoE) 35.4°C	33.5℃	100	71dBA
M4250-12M2XF	33.2°C		100	55dBA
M4250-16XF	30.3°C		100	57dBA
Heat Dissipation (BTU)	Without PoE, all ports	With Max PoE, all ports	Standby without ar	y port connection
M4250-10G2F-PoE+	17.32W - 59.13 BTU/hr	163.9W - 559.55 BTU/hr 8.53W - 29.13		.12BTU/hr
M4250-10G2XF-PoE+	25W - 85.35 BTU/hr	25W - 85.35 BTU/hr 306.4W - 1046.05 BTU/hr 12.96W - 44.2		1.24BTU/hr
M4250-10G2XF-PoE++	26.3W - 89.79 BTU/hr	837.7W - 2859.91 BTU/hr	18W - 61.	45BTU/hr
M4250-26G4F-PoE+	35.8W - 122.22 BTU/hr	401W - 1369.01 BTU/hr	23.4W - 79	89 BTU/hr
M4250-26G4F-PoE++	48.8W - 166.6 BTU/hr	1 PSU: 889W - 3035.05 BTU/hr	nr 36.9W - 125.98 BTU/hr	
		2 PSU: 1734W - 5919.88 BTU/hr		
M4250-26G4XF-PoE+	46.8W - 159.78 BTU/hr	614W - 2096.2 BTU/hr	33.9W - 115	.73 BTU/hr
M4250-40G8F-PoE+	59.5W - 203.13 BTU/hr 624.8W - 2133.07 BTU/hr 46.4W -		46.4W - 158	.41 BTU/hr
M4250-40G8XF-PoE+	89.2W - 304.53 BTU/hr 1197W - 4086.56 BTU/hr		74.5W - 254	.34 BTU/hr
M4250-40G8XF-PoE++	82.6W - 282 BTU/hr	1 PSU: 912W - 3113.57 BTU/hr	68.5W - 233	.86 BTU/hr
		2 PSU: 1998W - 6821.17 BTU/hr		
		3 PSU: 3523W - 12027.52 BTU/hr		
M4250-12M2XF	37.9W - 129.39 BTU/hr	-	14.1W - 48	.14BTU/hr
M4250-16XF	47.84W - 163.33 BTU/hr	-	19.27W - 65	5.78BTU/hr
Mean Time Between Failures (MTBF)	@ 25 °C ambient (77 °F)	@ 45 °C ambient (113 °F)	@ 50 °C amb	ient (122 °F)
M4250-10G2F-PoE+	778,769 hours (~88.9 years)	530,659 hours (~60.6 years)	-	
M4250-10G2XF-PoE+	576,889 hours (~65.9 years)	562,708 hours (~64.2 years)	-	
M4250-10G2XF-PoE++	947,871 hours (~108.2 years)	493,860 hours (~56.4 years)	-	
M4250-26G4F-PoE+	E44.0E41	342,368 hours (~39.1 years)		
	511,054 hours (~58.3 years)	342,300 Hours (~37.1 years)		
M4250-26G4F-PoE++	491,282 hours (~56.1 years)	262,204 hours (~29.9 years)	-	
		·	-	
M4250-26G4F-PoE++ M4250-26G4XF-PoE+ M4250-40G8F-PoE+	491,282 hours (~56.1 years)	262,204 hours (~29.9 years)	- - -	
M4250-26G4XF-PoE+	491,282 hours (~56.1 years) 509,057 hours (~58.1 years)	262,204 hours (~29.9 years) 285,719 hours (~32.6 years)	- - -	
M4250-26G4XF-PoE+ M4250-40G8F-PoE+	491,282 hours (~56.1 years) 509,057 hours (~58.1 years) 341,680 hours (~39 years)	262,204 hours (~29.9 years) 285,719 hours (~32.6 years) 342,368 hours (~39.1 years)	- - - -	
M4250-26G4XF-PoE+ M4250-40G8F-PoE+ M4250-40G8XF-PoE+	491,282 hours (~56.1 years) 509,057 hours (~58.1 years) 341,680 hours (~39 years) 487,900 hours (~55.7 years)	262,204 hours (~29.9 years) 285,719 hours (~32.6 years) 342,368 hours (~39.1 years) 285,719 hours (~32.6 years)	- - - - 416,021 hours	(~47.5 years)

Agenda Item 9.(e) Approval of Quote Awards to multiple vendors for the I... NETGEAR®

AV Line

Datasheet | M4250 series

2 Services - VLANs		
IEEE 802.1Q VLAN Tagging	Yes	802.1Q-1998 Up to 4,093 VLANs - 802.1Q Tagging
Auto-Trunk	Yes	Dynamic VLAN trunking as soon as a M4250 switch gets connected to anothe M4250 switch
Protocol Based VLANs	Yes	
IP subnet	Yes	
ARP	Yes	
IPX	Yes	
Subnet based VLANs	Yes	
MAC based VLANs	Yes	
Voice VLAN	Yes	Based on phones OUI bytes (internal database, or user-maintained) or protocols (SIP, H323 and SCCP)
Private Edge VLAN	Yes	
Private VLAN	Yes	
IEEE 802.1x	Yes	802.1x-2004
Guest VLAN	Yes	
RADIUS based VLAN assignment via .1x	Yes	IP phones and PCs can authenticate on the same port but under different
RADIUS based Filter ID assignment via .1x	Yes	VLAN assignment policies
MAC-based .1x	Yes	
Unauthenticated VLAN	Yes	
Double VLAN Tagging	Yes	
Enabling dvlan-tunnel makes interface	Yes	
Global ethertype (TPID)	Yes	
Interface ethertype (TPID) Customer ID using PVID	Yes Yes	
•		A control of the late
GARP with GVRP/GMRP	Yes	Automatic registration for membership in VLANs or in multicast groups
Multiple Registration Protocol (MRP)	Yes	Can replace GARP functionality
Multicast VLAN Registration Protocol (MVRP)	Yes	Can replace GARP functionality
MVR (Multicast VLAN registration)	Yes	
2 Services - Availability		
IEEE 802.3ad - LAGs	Yes	Up to 8 LAGs and up to 8 ports per group
LACP	Yes	
LACP automatically reverts to and from Static LAG	Yes	
Static LAGs	Yes	
LAG Hashing	Yes	
LAG Member Port Flaps Tracking	Yes	
Auto-LAG	Yes	If more than one link between two M4250 switches, a Link Aggregation Group is created, dynamically
Storm Control	Yes	
IEEE 802.3x (Full Duplex and flow control) Per port Flow Control	Yes Yes	Asymmetric and Symmetric Flow Control
UDLD Support (Unidirectional Link Detection)	Yes	
Normal-Mode	Yes	
Aggressive-Mode	Yes	
Link Dependency	Yes	Allow the link status of specified ports to be dependent on the link status of other ports
IEEE 802.1D Spanning Tree Protocol	Yes	
IEEE 802.1w Rapid Spanning Tree	Yes	
IEEE 802.1s Multiple Spanning Tree	Yes	
Per VLAN STP (PVSTP) with FastUplink and	Yes	PVST+ interoperability

/// AV Line

Per VLAN Rapid STP (PVRSTP)	Yes	RPVST+ interoperability
STP Loop Guard	Yes	
STP Root Guard	Yes	
STP BPDU Guard	Yes	
STP BPDU Filtering	Yes	
STP BPDU Flooding	Yes	
L2 Services - Multicast Filtering		
IGMPv2 Snooping Support	Yes	
IGMPv3 Snooping Support	Yes	
NETGEAR IGMP Plus™ Enhanced Implementation	Yes	For automatic multicast across M4250 / M4300 / M4500 (Spine and Leaf) at Layer 2, removing the need for L3 PIM routing
MLDv1 Snooping Support	Yes	
MLDv2 Snooping Support	Yes	
Expedited Leave function	Yes	
Static L2 Multicast Filtering	Yes	
Enable IGMP / MLD Snooping per VLAN	Yes	
IGMPv1/v2 Snooping Querier, compatible v3 queries	Yes	
MLDv1 Snooping Querier	Yes	
MGMD Snooping Control Packet Flooding Flooding to mRouter Ports Remove Flood-All-Unregistered Option	Yes Yes Yes	
Multicast VLAN registration (MVR)	Yes	
L3 Services - Multicast Routing		
IGMP Proxy	Yes	
MLD Proxy	Yes	
Any Source Multicast (ASM)	Yes	
Source Specific Multicast (SSM)	Yes	
Multicast streams routing between subnets, VLANs	Yes	
Multicast static routes (IPv4, IPv6)	Yes	
Neighbor discovery	Yes	
PIM-DM (Multicast Routing - dense mode)	Yes	
PIM-DM (IPv6)	Yes	
PIM-SM (Multicast Routing - sparse mode)	Yes	
PIM-SM (IPv6)	Yes	
PIM multi-hop RP support	Yes	
PIM Timer Accuracy	Yes	
PIM-SM Unhandled Events	Yes	
IPMC replication (hardware support)	Yes	
L3 Services - DHCP		
DHCP IPv4 / DHCP IPv6 Client	Yes	
DHCP IPv4 / DHCP IPv6 Server (Stateless, Stateful)	Yes	
DHCP Snooping IPv4 / IPv6	Yes	
BootP Relay IPv4 / IPv6	Yes	
DHCP Relay IPv4 / IPv6	Yes	

AV Line Managed Switches

AV Line

DHCP Relay Option 82 circuit-id and remote-id for VLANs	Yes	
Multiple Helper IPs	Yes	
Auto Install (DHCP options 66, 67, 150 and 55, 125)	Yes	
L3 Services - Routing		
Static Routing / ECMP Static Routing Multiple next hops to a given destination Load sharing, Redundancy Default routes Static Reject routes	IPv4/IPv6 Yes Yes Yes Yes	
Port Based Routing	Yes	
VLAN Routing 802.3ad (LAG) for router ports	Yes Yes	
Loopback Interfaces	Yes	
RIP	IPv4	
RIPv1/RIPv2 IP Multinetting	Yes Yes	
ICMP throttling	Yes	
Router Discovery Protocol	Yes	
DNS Client	IPv4/IPv6	
IP Helper	Yes	
Max IP Helper entries	512	
IP Event Dampening	IPv4/IPv6	
Proxy ARP	IPv4/IPv6	
ICMP	IPv4/IPv6	
ICMP redirect detection in hardware	Yes	
Policy Based Routing (PBR) Based on the size of the packet	IPv4/IPv6 Yes	
Based on the Protocol of the payload (Protocol ID field)	Yes	
Based on Source MAC address Based on Source or Destination IP address	Yes Yes	
Based on VLAN tag	Yes	
Based on Priority(802.1P priority)	Yes	
Network Monitoring and Discovery Services		
ISDP (Industry Standard Discovery Protocol)	Yes	Can interoperate with devices running CDP
802.1ab LLDP	Yes	
802.1ab LLDP - MED	Yes	
SNMP	V1, V2, V3	
RMON 1,2,3,9	Yes	
sFlow	Yes (IPv4 and IPv6 headers)	
Security		
Network Storm Protection, DoS		
Broadcast, Unicast, Multicast DoS Protection Denial of Service Protection (control plane) Denial of Service Protection (data plane)	Yes Yes Yes	Switch CPU protection Switch Traffic protection

AV Line

DoS Attacks Protection		SIPDIP SMACDMAC FIRSTFRAG TCPFRAG TCPFLAG TCPPORT	UDPPORT TCPFLAGSEQ TCPOFFSET TCPSYN TCPSYNFIN TCPFINURGPSH	L4PORT ICMP ICMPV4 ICMPV6 ICMPFRAG PINGFLOOD	SYNACK
CPU Rate Limiting	Yes		and IPv6 multicast packets with u		en IP routing/
ICMP throttling	Yes	Restrict ICMP, PI	NG traffic for ICMP-based DoS at	tacks	
Management					
Management ACL (MACAL) Max Rules	Yes 64	Protects manage	ement CPU access through the LA	N	
Out of band Management	Yes	In-band manage	ement can be shut down entirely v	when out-of-band manage	ement network
Radius accounting	Yes	RFC 2565 and RI	FC 2866		
TACACS+	Yes				
Malicious Code Detection	Yes	Software image	files and Configuration files with	digital signatures	
Network Traffic					
Access Control Lists (ACLs)	L2 / L3	R / I 4 ΜΔ	AC, IPv4, IPv6, TCP, UDP		
Time-based ACLs	Yes	77 - 1917	(C, 11 V+, 11 VO, 1C1, OD1		
Protocol-based ACLs	Yes				
ACL over VLANs	Yes				
Dynamic ACLs	Yes		(000.4.)		6.1
IEEE 802.1x Radius Port Access Authentication	Yes	Up to 48 clients ((802.1x) per port are supported,	ncluding the authenticati	on of the users domair
802.1x MAC Address Authentication Bypass (MAB)	Yes	Supplemental au	uthentication mechanism for non-8	302.1x devices, based on t	heir MAC address only
Network Authentication Successive Tiering	Yes	Dot1x-> MAP ->	Captive Portal successive authen	tication methods based c	n configured time-out
Port Security	Yes				
IP Source Guard	Yes			IPv4 / IPv6	
DHCP Snooping	Yes			IPv4 / IPv6	
Dynamic ARP Inspection	Yes			IPv4 / IPv6	
IPv6 RA Guard Stateless Mode	Yes				
MAC Filtering	Yes				
Port MAC Locking	Yes				
Private Edge VLAN	Yes	A protected port protected port -	t doesn't forward any traffic (unica same switch	ast, multicast, or broadcas	t) to any other
Private VLANs	Yes	Scales Private Ec Layer 2 network	dge VLANs by providing Layer 2 is	solation between ports ac	ross switches in same
Quality of Service (QoS) - Summary					
Access Lists	Yes				
L2 MAC, L3 IP and L4 Port ACLs	Yes				
Ingress	Yes				
Egress	Yes				
Time-based	Yes				
802.3ad (LAG) for ACL assignment	Yes				
Binding ACLs to VLANs	Yes Yes				
ACL Logging	YAC				
Support for IPv6 fields	Yes				

AV Line Managed Switches

AV Line

DiffServ QoS Edge Node applicability Interior Node applicability 802.3ad (LAG) for service interface Support for IPv6 fields Ingress/Egress	Yes Yes Yes Yes Yes Yes Yes
IEEE 802.1p COS 802.3ad (LAG) for COS configuration WRED (Weighted Deficit Round Robin) Strict Priority queue technology	Yes Yes Yes Yes
Single Rate Policing Committed Information Rate Committed Burst Size Excessive Burst Size DiffServ feature applied to class maps	Yes (CLI only) Yes Yes Yes Yes Yes
Auto-VoIP	Yes, based on protocols (SIP, H323 and SCCP) or on OUI bytes (default database and user-based OUIs) in the phone source MAC address
QoS - ACL Feature Support	
ACL Support (general, includes IP ACLs) MAC ACL Support IP Rule Match Fields: Destination IP Destination IPv6 IP Destination L4 Port Every Packet IP DSCP IP Precedence IP TOS	Yes Yes Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound
Protocol Source IP (for Mask support see below) Source IPv6 IP L3 IPv6 Flow Label Source L4 Port TCP Flag (ack, est, fin) Supports Masking	Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound
MAC Rule Match Fields COS Destination MAC Destination MAC Mask Ethertype Source MAC Source MAC Mask VLAN ID	Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound
Rules attributes Assign Queue Logging deny rules Mirror (to supported interface types only) Redirect (to supported interface types only) Rate Limiting permit rules	Inbound Inbound/Outbound Inbound Inbound Inbound Inbound

AV Line Managed Switches

/// AV Line

Interface	
Inbound direction	Yes
Outbound direction	Yes
Supports LAG interfaces	Yes
Supports Control-plane interface	Yes
Multiple ACLs per interface, dir	Yes
Mixed-type ACLs per interface, dir	Yes
Mixed L2/IPv4 ACLs per interface, inbound	Yes
Mixed IPv4/IPv6 ACLs per interface, inbound	Yes
Mixed IPv4/IPv6 ACLs per interface, outbound	Yes
QoS - DiffServ Feature Support	
DiffServ Supported	Yes
Class Type	
All	Yes
Class Match Criteria	165
COS	Inbound/Outbound
	Inbound
COS2 (Secondary COS) Destination IP (for Mask support see below)	Inbound Inbound/Outbound
Destination IP (for mask support see below) Destination IPv6 IP	Inbound/Outbound
Destination L4 Port	Inbound/Outbound
Destination L4 Fort Destination MAC (for Mask support see below)	Inbound/Outbound
Ethertype	Inbound/Outbound
Every Packet	Inbound/Outbound
IP DSCP	Inbound/Outbound
IP Precedence	Inbound/Outbound
IP TOS (for Mask support see below)	Inbound/Outbound
Protocol	Inbound/Outbound
Reference Class	Inbound/Outbound
	Inbound/Outbound
Source IP (for Mask support see below) Source IPv6 IP	Inbound/Outbound
L3 IPv6 Flow Label	Inbound
Source L4 Port	Inbound/Outbound
	Inbound/Outbound
Source MAC (for Mask support see below)	Inbound/Outbound
VLAN ID (Source VID)	Inbound/Outbound
VLAN ID2 (Secondary VLAN) (Source VID) Supports Masking	Inbound/Outbound
Policy	inbound/Outbound
Out Class Unrestricted	Yes
Policy Attributes Inbound	
Assign Queue	Yes
Drop	Yes
Mark COS	Yes
Mark COS-AS-COS2	Yes
Mark COS2 (Secondary COS)	Yes
Mark IP DSCP	Yes
Mark IP Precedence	Yes
Mirror (to supported interface types only)	Yes
Police Simple	Yes
Police Single-Rate	Yes
Police Two-Rate	Yes
Police Color Aware Mode	Yes
Redirect (to supported interface types only)	Yes

AV Line Managed Switches

/// AV Line

Policy Attributes Outbound	Yes
Drop	Yes
Mark COS	Yes
Mark IP Proceedings	Yes
Mark IP Precedence	Yes Yes
Mirror (to supported interface types only) Police Simple	Yes
Police Simple Police Single-Rate	Yes
Police Two-Rate	Yes
Police Color Aware Mode	Yes
Redirect (to supported interface types only)	Yes
Service Interface	
Inbound Slot.Port configurable	Yes
Inbound 'All' Ports configurable	Yes
Outbound Slot.Port configurable	Yes
Outbound 'All' Ports configurable	Yes
Supports LAG interfaces	Yes
Mixed L2/IPv4 match criteria, inbound	Yes
Mixed IPv4/IPv6 match criteria, inbound	Yes
Mixed IPv4/IPv6 match criteria, outbound	Yes
PHB Support EF	Yes
AF4x	res Yes
AF3x	Yes
AF2x	Yes
AF1x	Yes
CS	Yes
Statistics Policy Instance	
Offered	packets
Discarded	packets
QoS - COS Feature Support	
COS Support	Yes
Supports LAG interfaces	Yes
COS Mapping Config	
Configurable per-interface	Yes
IP DSCP Mapping	Yes
COS Queue Config	
Queue Parms configurable per-interface	Yes
Drop Parms configurable per-interface	Yes
Interface Traffic Shaping (for whole egress interface)	Yes
Minimum Bandwidth	Yes
Weighted Deficit Round Robin (WDRR) Support	Yes
Maximum Queue Weight	127
WRED Support	Yes
PTP - PTPv2 Feature Support	
PTPv2	
IEEE 1588 PTPv2 Section 10 and 11.5	Yes
Implementation	Transparent Clock (TC) End-to-End implementation considering the residence time of PTPv2 packets from ingress to egress
Limitations	PTPv1 packets are forwarded but not processed (no PTPv1 support).
Method	Residence time of the PPTPv2 packet at the egress port level
PTPv2 packet fields that are updated	The "Sync & Delay_Req" field of passing/egressing out PTPv2 packets is updated with the residence time in the switch
PTPv2 packet fields that are NOT updated	Other fields in PTPv2 packets ("Announce", "Delay_Resp", "Pdelay_Req" and "Pdelay_Resp") are not updated

AV Line Managed Switches

AV Line

TSN - Time Sensitive Networking AVB Feature Support		
AVB		
IEEE 802.1BA-2011 Audio Video Bridging (AVB)	Yes, when an AVB license is properly installed in the tion at the end of the Tech Spec section)	e switch (license sold separately, see Ordering Informa-
IEEE 802.1AS-2011 gPTP	Yes, with an AVB license	
IEEE 802.1Qav-2009 FQTSS	Yes, with an AVB license	
IEEE 802.1Qat-2010 MSRP	Yes, with an AVB license	
IEEE 802.1ak MMRP	Yes, with an AVB license	
IEEE 802.1ak MVRP	Yes, with an AVB license	
Max number of AVB streams	256 streams per switch	
Limitations	AVB isn't supported on a LAG (link aggregation gr	oup, or port channel)
Functional Summary - IETF RFC Standards and IEEE Netw	rork Protocols	
Core Management		
RFC 854 – Telnet	RFC 3414 – User-Based Security Model	
RFC 855 – Telnet option specifications	RFC 3415 – View-based Access Control Model	
RFC 1155 – SMI v1	RFC 3416 – Version 2 of SNMP Protocol Operations	
RFC 1157 – SNMP	RFC 3417 – Transport Mappings	
RFC 1212 – Concise MIB definitions	RFC 3418 – Management Information Base (MIB) for the Simple Network Management Protocol (SNMF	
RFC 1867 – HTML/2.0 forms with file upload extensions	Configurable Management VLAN	
RFC 1901 – Community-based SNMP v2		SSL 3.0 and TLS 1.2
RFC 1908 – Coexistence between SNMP v1 and SNMP v2	2	- RFC 2246 – The TLS protocol, version 1.0
RFC 2068 – HTTP/1.1 protocol as updated by draft-ietf-http-v11-spec-rev-03		- RFC 2346 – AES cipher suites for Transport layer security
RFC 2271 – SNMP framework MIB		- RFC 2818 – HTTP over TLS SSH 2.0
RFC 2295 – Transparent content negotiation		SSH 2.0
RFC 2296 – Remote variant selection; RSVA/1.0 state ma	nagement cookies – draft-ietf-http-state-mgmt-05	- RFC 4253 – SSH transport layer protocol
RFC 2576 – Coexistence between SNMP v1, v2, and v3		- RFC 4252 – SSH authentication protocol
RFC 2578 – SMI v2		- RFC 4254 – SSH connection protocol
RFC 2579 – Textual conventions for SMI v2		- RFC 4251 – SSH protocol architecture
RFC 2580 – Conformance statements for SMI v2		- RFC 4716 – SECSH public key file format
RFC 3410 – Introduction and Applicability Statements for Internet Standard Management Framework		- RFC 4419 – Diffie-Hellman group exchange for the SSH transport layer protocol
RFC 3411 – An Architecture for Describing SNMP Management Frameworks		HTML 4.0 specification, December 1997
RFC 3412 – Message Processing & Dispatching		
RFC 3413 – SNMP Applications		Java Script™ 1.3
A.I I.M		

Advanced Management

Industry-standard CLI with the following features:

Optional user password encryption - Scripting capability - Command completion Multisession Telnet server - Context-sensitive help Auto Image Upgrade

/// AV Line

Datasheet | M4250 series

AV Line Managed Switches

Core Switching	
IEEE 802.1AB – Link level discovery protocol	IEEE 802.1BA-2011, 802.1AS-2011 gPTP, 802.1Qav-2009 FQTSS, 802.1Qat-2010 MSRP, 802.1ak MMRP, MVRP with AVB license
IEEE 802.1D – Spanning tree	IEEE 802.3ac – VLAN tagging
IEEE 802.1p – Ethernet priority with user provisioning and mapping	IEEE 802.3ad – Link aggregation
IEEE 802.1Q – Virtual LANs w/ port-based VLANs	IEEE 802.3ae – 10 GbE
IEEE 802.1S – Multiple spanning tree compatibility	IEEE 802.3af – Power over Ethernet
IEEE 802.1v – Protocol-based VLANs	IEEE 802.3at – Power over Ethernet Plus
IEEE 802.1W – Rapid spanning tree	IEEE 802.3x – Flow control
iEEE 802.1AB – LLDP	ANSI/TIA-1057 – LLDP-MED
IEEE 802.1X – Port-based authentication	GARP – Generic Attribute Registration Protocol: clause 12, 802.1D-2004
IEEE 802.3 – 10Base-T	GMRP – Dynamic L2 multicast registration: clause 10, 802.1D-2004
IEEE 802.3u – 100Base-T	GVRP – Dynamic VLAN registration: clause 11.2, 802.1Q-2003
IEEE 802.3ab – 1000Base-T	RFC 4541 – IGMP snooping and MLD snooping
IEEE 802.3bz-2016 – 2.5GBASE-T	RFC 5171 – UniDirectional Link Detection (UDLD) Protocol
Additional Layer 2 Functionality	
Broadcast storm recovery	IGMP and MLD snooping querier
Double VLAN/VMAN tagging	Port MAC locking
DHCP Snooping	MAC-based VLANs
Dynamic ARP inspection	IP source guard
Independent VLAN Learning (IVL) support	IP subnet-based VLANs
IPv6 classification APIs	Voice VLANs
Jumbo Ethernet frames	Protected ports
Port mirroring	IGMP snooping
Static MAC filtering	Green Ethernet power savings mode
System Facilities	
Event and error logging facility	RFC 2030 – Simple Network Time Protocol (SNTP) V4 for IPv4, IPv6, and OSI
Runtime and configuration download capability	RFC 2131 – DHCP Client/Server
PING utility	RFC 2132 – DHCP options and BOOTP vendor extensions
XMODEM	RFC 2865 – RADIUS client
RFC 768 – UDP	RFC 2866 – RADIUS accounting
RFC 783 – TFTP	RFC 2868 – RADIUS attributes for tunnel protocol support
RFC 791 – IP	RFC 2869 – RADIUS extensions
RFC 792 – ICMP	RFC 28869bis – RADIUS support for Extensible Authentication Protocol (EAP)
RFC 793 – TCP	RFC 5176 – RADIUS Change of Auth

RFC 826 - ARP

Core Multicast

RFC 2236 – IGMP v2

RFC 2710 - MLDv1

RFC 1112 – Host extensions for IP multicasting

Datasheet | M4250 series **AV Line Managed Switches**

//// AV Line

RFC 020 - ARF	RFC 3164 – The BSD systog protocol with RFC 3424 update
RFC 951 – BOOTP	RFC 3580 – 802.1X RADIUS usage guidelines
RFC 1321 – Message digest algorithm	Power Source Equipment (PSE) IEEE 802.af Powered Ethernet (DTE Power via MDI) standard
RFC 1534 – Interoperability between BOOTP and DHCP	Tower Source Equipment (13E) IEEE 602.art owered Ethernet (DTE Fower via MDI) standard
Core Routing	
RFC 826 – Ethernet ARP	RFC 1812 – Requirements for IPv4 routers
RFC 894 – Transmission of IP datagrams over Ethernet networks	RFC 2082 – RIP-2 MD5 authentication
RFC 896 – Congestion control in IP/TCP networks	RFC 2131 – DHCP relay
RFC 1027 – Using ARP to implement transparent subnet gateways (Proxy ARP)	RFC 2385–Protection of BGP Sessions via the TCP MD5 Signature Option
RFC 1256 – ICMP router discovery messages	RFC 2453 – RIP v2
RFC 1321 – Message digest algorithm	RFC 3021 – Using 31-Bit Prefixes on Point-to-Point Links
RFC 1519 – CIDR	RFC 3046 – DHCP/BOOTP relay
Quality of Service - DiffServ	
RFC 2474 – Definition of the differentiated services field (DS Field) in IPv4/IPv6 headers	RFC 2697 – A Single Rate Three Color Marker
RFC 2475 – An architecture for differentiated services	RFC 3246 – An expedited forwarding PHB (Per-Hop Behavior)
RFC 2597 – Assured forwarding PHB group	RFC 3260 – New terminology and clarifications for DiffServ
Quality of Service - Access Control Lists (ACLs)	
Permit/deny actions for inbound or outbound IP traffic classification based on:	Permit/deny actions for inbound or outbound Layer 2 traffic classification based on:
 Type of service (ToS) or differentiated services (DS) DSCP field Source IP address Destination IP address TCP/UDP source port TCP/UDP destination port IPv6 flow label IP protocol number 	 Source MAC address Destination MAC address EtherType VLAN identifier value or range (outer and/or inner VLAN tag) 802.1p user priority (outer and/or inner VLAN tag) Optional rule attributes: Assign matching traffic flow to a specific queue Redirect or mirror (flow-based mirroring) matching traffic flow to a specific port
Quality of Service - Class of Service (CoS)	- Generate trap log entries containing rule hit counts
Direct user configuration of the following: - IP DSCP to traffic class mapping - IP precedence to traffic class mapping - Interface trust mode: 802.1p, IP Precedence, IP DSCP, or untrusted - Interface traffic shaping rate - Minimum and maximum bandwidth per queue - Strict priority versus weighted (WRR/WDRR/WFQ) scheduling per queue - Tail drop versus Weighted Random Early Detection (WRED) queue depth management	Auto VoIP

RFC3973 - PIM-DM

RFC4601 - PIM-SM

Draft-ietf-magma-igmp-proxy-06.txt – IGMP/MLD-based multicast forwarding (IGMP/MLD proxying)

RFC 3164 – The BSD syslog protocol with RFC 5424 update

AV Line Managed Switches

/// AV Line

RFC 2365 – Administratively scoped boundaries	Draft-ietf-magma-igmpv3-and-routing-05.txt – IGMPv3 and multicast routing protocol interaction
RFC 3376 – IGMPv3	Static RP configuration
RFC3810 – MLDv2	Static RP configuration
Core IPv6 Routing	
RFC 1981 – Path MTU for IPv6	RFC 3493 – Basic socket interface for IPv6
RFC 2373 – IPv6 addressing	RFC 3513 – Addressing architecture for IPv6
RFC 2460 – IPv6 protocol specification	RFC 3542 – Advanced sockets API for IPv6
RFC 2461 – Neighbor discovery	RFC 3587 – IPv6 global unicast address format
RFC 2462 – Stateless autoconfiguration	RFC 3736 – Stateless DHCPv6
RFC 2464 – IPv6 over Ethernet	RFC 4213 – Basic transition mechanisms for IPv6
RFC 2711 – IPv6 router alert	RFC 4291 – Addressing architecture for IPv6
RFC 3056–Connection of IPv6 Domains via IPv4 Clouds	•
RFC 3315 – Dynamic Host Configuration Protocol for	RFC 4443 – Internet Control Message Protocol (ICMPv6) for the IPv6 Specification
IPv6 (DHCPv6)	RFC 6164 – Using 127-Bit IPv6 Prefixes on Inter-Router Links
RFC 3484 – Default address selection for IPv6	RFC 6583 – Operational Neighbor Discovery Problems
Supported MIBs	
Base Package MIBs	
ANSI/TIA-1057 – LLDP-EXT-MED-MIB	RFC 2674 – Q-BRIDGE-MIB
DIFFSERV DSCP TC (Draft – no RFC)	RFC 2677 – IANA Address Family Numbers MIB
DNS-RESOLVER-MIB (IETF DNS Working Group)	RFC 2819 – RMON MIB
DNS-SERVER-MIB (IETF DNS Working Group)	RFC 2925 – DISMAN-PING-MIB and DISMAN-TRACEROUTE-MIB
GreenEthernet Private MIB	RFC 3273 – RMON MIB for High Capacity Networks
IANA-ADDRESS-FAMILY-NUMBERS-MIB (IANA (3/2002)	RFC 3411 – SNMP Management Frameworks MIB
IEEE 802.1AB-2004 – LLDP MIB	RFC 3411 – SNMP-FRAMEWORK-MIB
IEEE 802.1AB-2005 – LLDP-EXT-DOT3-MIB	RFC 3412 – SNMP-MPD-MIB
POWER ETHERNET MIB (Draft – no RFC)	RFC 3413 – SNMP-NOTIFICATION-MIB
RFC 1155 – SMI-MIB	RFC 3413 – SNMP-PROXY-MIB (initial revision published as RFC 2273)
RFC 1450 – SNMPV2-MIB	RFC 3413 – SNMP-TARGET-MIB (initial revision published as RFC 2273)
RFC 2273 – SNMP Notification MIB, SNMP Target MIB	RFC 3414 – User-based Security Model for SNMPv3 MIB
RFC 2392 – IANA RTPROTO-MIB	RFC 3415 – View-based Access Control Model for SNMP MIB
RFC 2572 – SNMP Message Processing and Dispatching MIB	RFC 3417 – SNMPV2-TM
RFC 2574 – User-based Security Model for SNMPv3 MIB	RFC 3418 – SNMPv2 MIB
RFC 2575 – View-based Access Control Model for SNMP MIB	RFC 3434 – RMON MIB Extensions for High Capacity Alarms
RFC 2576 – SNMP Community MIB	RFC 3584 – SNMP Community MIB
RFC 2578 – SNMPV2-SMI	RFC 3621 – POWER-ETHERNET-MIB

AV Line

AV Line Managed Switches

RFC 2579 – SNMPV2-TC	SNMP-RESEARCH-MIB— SNMP research MIB definitions
RFC 2580– SNMPV2-CONF	SR-AGENT-INFO-MIB— SNMP research MIB definitions
RFC 2613 – SMON-MIB	USM-TARGET-TAG-MIB – SNMP research MIB definitions
Switching Package MIBs	
RFC 1213 – MIB-II	RFC 2011 – SNMPv2 Management Information Base
ANSI/TIA 1057 – LLDP-MED MIB	RFC 2213 – Integrated Services MIB
FASTPATH Enterprise MIBs supporting switching features	RFC 2233 – IF-MIB
FASTPATH-MMRP-MIB – MMRP private MIB for IEEE 802.1Q devices	RFC 2233 – The Interfaces Group MIB using SMI v2
FASTPATH-MSRP-MIB – MSRP private MIB for IEEE 802.1Q devices	RFC 2674 – VLAN and Ethernet Priority MIB (P-Bridge MIB)
FASTPATH-MVRP-MIB – MVRP private MIB for IEEE 802.1Q devices	RFC 2737 – Entity MIB (Version 2)
IANAifType-MIB – IANAifType Textual Convention	RFC 2819 – RMON Groups 1,2,3, & 9
IEEE 802.1AB – LLDP MIB	RFC 2863 – Interfaces Group MIB
IEEE 802.3AD MIB (IEEE8021-AD-MIB)	RFC 3291 – INET Address MIB
IEEE Draft P802.1AS/D7.0 (IEEE8021-AS-MIB)	RFC 3291 – Textual Conventions for Internet Network Addresses
IEEE LAG-MIB – Link Aggregation module for managing IEEE 802.3ad	RFC 3621 – Power Ethernet MIB
LLDP-EXT-DOT3-MIB (part of IEEE Std 802.1AB)	RFC 3635 – Etherlike MIB
LLDP-MIB (part of IEEE Std 802.1AB)	RFC 3636 – IEEE 802.3 Medium Attachment Units (MAUs) MIB
Private MIB for 802.1Qat, 802.1Qav Configuration	RFC 4022 – Management Information Base for the Transmission Control Protocol (TCP)
RFC 1493 – Bridge MIB	RFC 4113 – Management Information Base for the User Datagram Protocol (UDP)
RFC 1643 – Definitions of managed objects for the Ethernet-like interface types	RFC 4444 – IS-IS MIB
Routing Package MIBs	
FASTPATH Enterprise MIBs supporting routing features	RFC 2096 – IP Forwarding Table MIB
IANA-Address-Family-Numbers-MIB	RFC 2668 – IEEE 802.3 Medium Attachment Units (MAUs) MIB
IPv6 Management MIBs	
RFC 3419 – TRANSPORT-ADDRESS-MIB	IPv6-MIB (draft)
IPv6-ICMP-MIB (draft)	ii vo iiib (didil)
IPv6 Routing MIBs	
RFC 2465 – IPv6 MIB	RFC 2466 – ICMPv6 MIB
QoS Package MIB	
RFC 3289 – DIFFSERV-MIB & DIFFSERV-DCSP-TC MIBs	Private MIBs for full configuration of DiffServ, ACL, and CoS functionality
Security MIB	
RFC 2618 – RADIUS Authentication Client MIB	IEEE8021-PAE-MIB — The Port Access Entity module for managing IEEE 802.1X
RFC 2620 – RADIUS Accounting MIB	IEEE 802.1X MIB (IEEE 8021-PAE-MIB 2004 Revision)

AV Line Managed Switches

AV Line

Multicast Package MIBs			
RFC 2932 – IPv4 Multicast Routing MIB for PIMDMv4	draft-ietf-magma-mgmd-mib-05.txt –Multicast Group Membership Discovery MIB (both IGMP and MLD)		
RFC 5060 – PIM-SM and PIM-DM MIB for IPv4 and IPv6	FASTPATH Enterprise MIBs supporting multicast features		
RFC 5240 – BSR Protocol MIB	FASTPATH Enterprise MIBs supporting multicast features		
NETGEAR-BOXSERVICES-PRIVATE-MIB for SFP/SFP+ MIB	Support		
boxServicesFiberPortsOpticsTable	boxServicesFiberPortOpticsPowerOut		
BoxServicesFiberPortsOpticsEntry	boxServicesFiberPortOpticsPowerIn		
boxServicesFiberPortIndex	box Services Fiber Port Optics Tx Fault		
boxServicesFiberPortOpticsTemperature	boxServicesFiberPortOpticsLos		
boxServicesFiberPortOpticsVoltage	boxServicesFiberPortOpticsFaultStatus		
boxServicesFiberPortOpticsCurrent	boxservices i iberi ortopiicsi autistatus		
Management			
Password management	Yes		
Configurable Management VLAN	Yes		
Out-of-band Management	Yes	In-band management can be shut down using Management ACLs when separate management network	
Auto Install (BOOTP and DHCP options 66, 67, 150 and 55, 125)	Yes	Scalable deployment process (firmware, config)	
Admin access control via Radius and TACACS+	Yes	Policies, Enable	
Industry standard CLI (IS-CLI)	Yes	Command Line interface	
CLI commands logged to a Syslog server	Yes		
Web-based graphical user interface (GUI)	Yes	Fully functional GUI (exceptions are noted below:)	
Features without Web GUI support Authorization List Control Plane ACL UDLD Policy Based Routing LLPF QoS Policy for Single Rate DHCPv6 Snooping IPv6 DHCP Relay eMail Alerting MMRP	CLI only CLI only CLI only CLI only CLI only CLI only CLI only CLI only CLI only CLI only CLI only CLI only CLI only CLI only		
Telnet	Yes		
IPv6 management	Yes		
Dual Software (firmware) image	Yes	Allows non disruptive firmware upgrade process	
Editable Configuration file	Yes	Text-based (CLI commands) configuration file	
Non disruptive Config Management	Yes	With new startup configuration file, the switch gracefully resolves any differences with the running config	
IS-CLI Scripting	Yes		
Port descriptions	Yes		

AV Line Managed Switches

/// AV Line

SNTP client over UDP port 123	Yes	Provides synchronized network timestamp either in broadcast or unicast mode
XMODEM	Yes	
SNMP v1/v2	Yes	
SNMP v3 with multiple IP addresses	Yes	
RMON 1,2,3,9 Max Ether Stats entries Max History entries Max buckets per History entry Max Alarm entries Max Event entries Max Log entries per Event entry	Yes 34 102 10 102 102	
Port Mirroring Number of monitor sessions Tx/Rx Many to One Port Mirroring LAG supported as source ports Max source ports in a session Remote Port Mirroring (RSPAN)	Yes 1 (multiple sessions are configurable) Yes Yes Yes Total switch port count Yes When a particular session is enabled, any traffic encopied (mirrored) onto a Remote Switched Port Ar	ntering or leaving the source ports of that session is nalyzer (RSPAN) VLAN
Flow based mirroring	Yes	
Cable Test utility	Yes	CLI, Web GUI
Outbound Telnet	Yes	
SSHv2 SSH Session Configuration	Yes Yes	Secure Shell version 2 (OpenSSH 7.5p1)
SSL v3 and TLS v1.2 for HTTPS web-based access	Yes	Open SSL 1.0.2o)
2048-bit RSA key pairs	Yes For SSLv3 and SSHv2	
SHA2-256 and SHA2-512 cryptographic hash functions	Yes For SSLv3 and SSHv2	
File transfers (uploads, downloads)	TFTP / HTTP	
Secured protocols for file transfers	SCP / SFTP / HTTPS	
HTTP Max Sessions	16	
SSL/HTTPS Max Sessions	16	
HTTP Download (firmware)	Yes	
Email Alerting	Yes (CLI only)	
Syslog (RFC 3164) (RFC 5424)	Yes, forwarding messages via UDP using the Syslo	g protocol to one or more collectors or relays
Persistent log supported	Yes	
User Admin Management		
User ID configuration Max number of configured users Support multiple READWRITE Users Max number of IAS users (internal user database)	Yes 6 Yes 100	
Authentication login lists	Yes	
Authentication Enable lists	Yes	

AV Line Managed Switches

/// AV Line

Authentication HTTP lists	Yes
Authentication HTTPS lists	Yes
Authentication Dot1x lists	Yes
Accounting Exec lists	Yes
Accounting Commands lists	Yes
Login History	50
M4250 series - Platform Constants	
Maximum number of remote Telnet connections	5
Maximum number of remote SSH connections	5
Number of MAC Addresses	16K
Number of VLANs	4,093 VLANs (802.1Q) simultaneously
VLAN ID Range	1 - 4093
Number of 802.1p Traffic Classes	8 classes
IEEE 802.1x Number of .1x clients per port	48
Number of LAGs	8 LAGs with up to 8 ports per group
Maximum multiple spanning tree instances (MSTP)	16
Maximum per VLAN spanning tree instances (PVST)	32
MAC based VLANS Number supported	Yes 256
Number of network buffers	182
Number of log messages buffered	200
Static filter entries Unicast MAC and source port Multicast MAC and source port Multicast MAC and destination port (only)	20 20 1024
Subnet based VLANs Number supported	Yes 128
Protocol Based VLANs Max number of groups Max protocols	Yes 128 16
Maximum Multicast MAC Addresses entries	1K
Jumbo Frame Support Max Size Supported	Yes 12k
Number of IP Source Guard stations	379
Number of DHCP snooping bindings	32K
Number of DHCPv6 snooping bindings	32K
Number of DHCP snooping static entries	1024
LLDP-MED number of remote nodes LLDP Remote Management address buffers LLDP Unknown TLV address buffers LLDP Organisationally Defined Large TLV buffers LLDP Organisationally Defined Small TLV buffers	32 32 100 16 100

/// AV Line

AV Line Managed Switches

Port MAC Locking Dynamic addresses per port Static addresses per port	Yes 600 20	
sFlow Number of samplers Number of pollers Number of receivers	16 16 8	
Radius Max Authentication servers Max Accounting servers	32 32	
Number of Routes (v4/v6) IPv4 Unicast Routes in Default IPv4 Basic SDM Template IPv6 Unicast Routes in Default IPv4 Basic SDM	894 SDM (Syste	em Data Management, or switch database)
Template RIP application route scaling (IPv4 only)	32	
Number of routing interfaces (including port/vlan)	128	
Number of static routes (v4/v6)	64/64	
DHCP Server Max number of pools Total max leases	256 2K	
DNS Client Concurrent requests Name server entries Seach list entries Static host entries Cache entries Domain search list entries	16 8 6 64 128 32	
DHCPv6 Server Max number of pools DNS domain names within a pool DNS server addresses within a pool Delegated prefix definitions within a pool	16 5 8 10	
Number of Host Entries (ARP/NDP) IPv4 only SDM build IPv4/IPv6 SDM build (v4/v6) Static v4 ARP Entries	4K SDM (Syste 512 128	em Data Management, or switch database)
Number of ECMP Next Hops per Route	16	
Number of ECMP groups	128	
Total ECMP nexthops in Hardware	2048	
Maximum MFDB entries	1K	
IGMPv3 / MLDv2 Snooping Limits IGMPv3/MLDv2 HW entries when IP Multicast present	128/64	
IP Multicast IGMP Group Memberships per system Multicast Routes PIM-DM Neighbors PIM-SM Neighbors PIM-SM Static RP Entries PIM-SM Candidate RP Group Range Entries PIM-SM SSM Range Entries IGMP Sources processed per group per message	2K (IPv4) and 2K (IPv6) 512 (IPv4) and 128 (IPv 256 55 20 5	

AV Line

Datasheet | M4250 series

AV Line Managed Switches

ACL Limits Maximum Number of ACLs (any type) Maximum Number Configurable Rules per List Maximum ACL Rules per Interface and Direction Maximum ACL Rules per Interface and Direction (IPv6) Maximum ACL Rules (system-wide) Maximum ACL Logging Rules (system-wide) Maximum ACL per VLAN (system-wide)	100 1,023 1,023 ingress / 511 ingress 893 ingress / 253 egress 16K 128
COS Device Characteristics Configurable Queues per Port Configurable Drop Precedence Levels	8 queues (standalone) 7 queues (stack) 3
DiffServ Device Limits Number of Queues Requires TLV to contain all policy instances combined Max Rules per Class Max Instances per Policy Max Attributes per Instance Max Service Interfaces Max Table Entries Class Table Class Rule Table Policy Table Policy Instance Table Policy Attribute Table Max Nested Class Chain Rule Count	8 queues (standalone) 7 queues (stack) Yes 13 28 3 116 32 192 64 768 2304 26
AutoVoIP number of voice calls	16
Voice VLAN number of devices	16
LEDs	
Per port	Speed, Link, Activity, PoE - Available both in front and in the rear
Per device	Power, Fan - Available both in front and in the rear
Physical Specifications	
Dimensions M4250-10G2F-PoE+ M4250-10G2XF-PoE+ M4250-10G2XF-PoE+ M4250-26G4F-PoE+ M4250-26G4F-PoE+ M4250-26G4XF-PoE+ M4250-26G4XF-PoE+ M4250-40G8XF-PoE+ M4250-40G8XF-PoE+ M4250-40G8XF-PoE+ M4250-12M2XF M4250-12M2XF	Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 7.87 inches (200 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 7.87 inches (200 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 10.12 inches (257 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 10.12 inches (257 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 15.75 inches (400 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 15.75 inches (400 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 15.75 inches (400 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 15.75 inches (400 mm) Width: 17.32 inches (440 mm); Height: 2U - 3.40 inches (86.4 mm); Depth: 13.78 inches (350 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 3.94 inches (100 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 3.94 inches (200 mm)
Weight M4250-10G2F-PoE+ M4250-10G2XF-PoE+ M4250-10G2XF-PoE+ M4250-26G4F-PoE+ M4250-26G4F-PoE+ M4250-26G4XF-PoE+ M4250-40G8F-PoE+ M4250-40G8XF-PoE+ M4250-40G8XF-PoE+ M4250-12M2XF M4250-12M2XF	6.28 lb (2.850 kg) 6.39 lb (2.900 kg) 8.44 lb (3.830 kg) 9.47 lb (4.300 kg) 14.87 lb (6.746 kg) 12.02 lb (5.453 kg) 12.90 lb (5.852 kg) 13.91 lb (6.312 kg) 22.72 lb (10.280 kg) 3.85 lb (1.745 kg) 6.17 lb (2.800 kg)

NETGEAR®

//// AV Line

Datasheet | M4250 series

AV Line Managed Switches

	_	
Power	Consum	ntion

All ports used, max PoE load, line-rate traffic, maximum

 M4250-10G2F-PoE+
 163.9W - 559.55 BTU/hr

 M4250-10G2XF-PoE+
 306.4W - 1046.05 BTU/hr

 M4250-10G2XF-PoE++
 837.7W - 2859.91 BTU/hr

 M4250-26G4F-PoE+
 401W - 1369.01 BTU/hr

M4250-26G4F-PoE++ 1 PSU: 889W - 3035.05 BTU/hr 2 PSU: 1734W - 5919.88 BTU/hr

 M4250-26G4XF-PoE+
 614W - 2096.2 BTU/hr

 M4250-40G8F-PoE+
 624.8W - 2133.07 BTU/hr

 M4250-40G8XF-PoE+
 1197W - 4086.56 BTU/hr

M4250-40G8XF-PoE++ 1 PSU: 912W - 3113.57 BTU/hr 2 PSU: 1998W - 6821.17 BTU/hr 3 PSU: 3523W - 12027.52 BTU/hr

M4250-12M2XF - M4250-16XF - -

All ports used, no PoE, line-rate traffic, maximum

 M4250-10G2F-PoE+
 17.32W - 59.13 BTU/hr

 M4250-10G2XF-PoE+
 25W - 85.35 BTU/hr

 M4250-10G2XF-PoE++
 26.3W - 89.79 BTU/hr

 M4250-26G4F-PoE+
 35.8W - 122.22 BTU/hr

 M4250-26G4F-PoE++
 48.8W - 166.6 BTU/hr

 M4250-26G4XF-PoE+
 46.8W - 159.78 BTU/hr

 M4250-40G8F-PoE+
 59.5W - 203.13 BTU/hr

 M4250-40G8XF-PoE++
 82.6W - 282 BTU/hr

 M4250-12M2XF
 37.9W - 129.39 BTU/hr

 M4250-16XF
 47.84W - 163.33 BTU/hr

Standby, no connection on any port

M4250-40G8XF-PoE+

M4250-10G2F-PoE+ 8 53W - 29 12BTU/hr M4250-10G2XF-PoE+ 12.96W - 44.24BTU/hr M4250-10G2XF-PoE++ 18W - 61.45BTU/hr 23.4W - 79.89 BTU/hr M4250-26G4F-PoE+ M4250-26G4F-PoE++ 36.9W - 125.98 BTU/hr M4250-26G4XF-PoE+ 33.9W - 115.73 BTU/hr M4250-40G8F-PoE+ 46.4W - 158.41 BTU/hr M4250-40G8XF-PoE+ 74.5W - 254.34 BTU/hr M4250-40G8XF-PoE++ 68.5W - 233.86 BTU/hr M4250-12M2XF 14.1W - 48.14BTU/hr M4250-16XF 19.27W - 65.78BTU/hr

Environmental Specifications

Operating:

Temperature (non-PoE models: M4250-12M2XF, M4250-16XF)

32° to 122°F (0° to 50°C) 32° to 113°F (0° to 45°C)

89.2W - 304.53 BTU/hr

Temperature (all other models) Humidity

90% maximum relative humidity, non-condensing

Altitude 10,000 ft (3,000 m) maximum

Storage:

Temperature -4° to 158° F (-20° to 70° C)

Humidity 95% maximum relative humidity, non-condensing

Altitude 10,000 ft (3,000 m) maximum

Electromagnetic Emissions and Immunity

Certifications FCC: 47 CFR FCC Part 15, Class A; ANSI C63.4:2014

ISED: ICES-003:2016 Issue 7, Class A

CE: EN 55032:2015, Class A; EN61000-3-2:2014, Class A; EN 61000-3-3-:2013; EN 55024:2010; EN

55035:2017

RCM: AS/NZS CISPR 32:2015, Class A

CCC (China Compulsory Certificate): GB/T9254-2008, Class A

VCCI: VCCI-CISPR 32:2016, Class A

KC: KN32; KN 35, Class A

EAC: GOST IEC 62311-2013; GOST30804.3.2-2013; GOST30804.3.3-2013; GOST 30805.22-2013;

GOST CISPR 24-2013 BSMI: CNS 13438, Class A

AV Line

Datasheet | M4250 series

AV Line Managed Switches

Safety	
Certifications	CB report/Certificate: IEC 62368-1 Ed.2; IEC 60950-1 Ed.2 Am2 CSA: UL/ANSI 62368-1 ed.2; CAN/CSA C22.2 No. 62368-1-14 CE: EN 62368-1:2014 RCM: AZ/NZS 62368.1:2018 CCC (China Compulsory Certificate): GB4943.1-2011 KC: K 60950-1 (2011-12) EAC: GOST IEC 62368-1-2014 BSMI: CNS 14336-1
Package Content	
All models	Switch Power cord(s) RJ45 straight-through wiring serial console cable to DB9 USB Type-C to USB-A 2.0 console cable Rubber caps for the SFP/SFP+ sockets Rubber footpads for tabletop installation Installation guide Two regular (short) brackets and screws for two-post rack mount (for front posts) allowing for mounting with ports on the back, or ports on the front of the rack Two longer brackets for two-post rack mount (for front posts) recessing the switch by 2 inches in order to
	make room for the cabling
ProSAFE Warranty and Support	
ProSAFE Limited Lifetime Hardware Warranty**	Included
90 days of Technical Support via phone and email*	Included, 90 days after purchase
Lifetime Technical Support through online chat	Included, lifetime
Lifetime Next Business Day hardware replacement	Included, lifetime
ProSupport Service Packs	
Installation contracts for:	All models
PSB0304-10000S	Remote Installation Setup and Configuration Service Contract (2-hour planned appointment)
Supplemental support contracts for:	M4250-10G2F-PoE+, M4250-10G2XF-PoE+, M4250-10G2XF-PoE++, M4250-12M2XF, M4250-16XF, M4250-26G4F-PoE+
PMB0312-10000S	OnCall 24x7 1-year Category 2
PMB0332-10000S	OnCall 24x7 3-year Category 2
PMB0352-10000S	OnCall 24x7 5-year Category 2
Supplemental support contracts for:	M4250-26G4F-PoE++, M4250-26G4XF-PoE+, M4250-40G8F-PoE+, M4250-40G8XF-PoE+, M4250-40G8XF-PoE+
PMB0313-10000S	OnCall 24x7 1-year Category 3
PMB0333-10000S	OnCall 24x7 3-year Category 3
PMB0353-10000S	OnCall 24x7 5-year Category 3

/// AV Line

AV Line Managed Switches

Ordering Information

Optional Modules and Acc	cessories			
AGM731F	1000BASE-SX SFP LC Transceiver (multimode	AGM731F		
AGM732F	1000BASE-LX SFP LC Transceiver (single mod	AGM732F		
AGM734	1000BASE-T SFP RJ45 Transceiver	AGM734-10000S		
AXC761	10G Direct Attach SFP+ to SFP+ 1 Meter Pass	ive DAC Cable		AXC761-10000S
AXC763	10G Direct Attach SFP+ to SFP+ 3 Meter Pass	ive DAC Cable		AXC763 -10000S
AXC765	10G Direct Attach SFP+ to SFP+ 5 Meter Activ	ve DAC Cable		AXC765-10000S
AXC767	10G Direct Attach SFP+ to SFP+ 7 Meter Activ	ve DAC Cable		AXC767 -10000S
AXC7610	10G Direct Attach SFP+ to SFP+ 10 Meter Act	ive DAC Cable		AXC7610-10000S
AXC7615	10G Direct Attach SFP+ to SFP+ 15 Meter Fib	er DAC Cable		AXC7615 -10000S
AXC7620	10G Direct Attach SFP+ to SFP+ 20 Meter Fib	er DAC Cable		AXC7620 -10000S
AXM761	10GBASE-SR SFP+ LC Transceiver (multimode	e, 300m OM4/OM3 50/125µm, 33m	OM2/OM1 62.5/125μm)	AXM761-10000S
AXM761 (pack of 10)	Pack of 10 AXM761 Transceivers (multimode,	300m OM4/OM3 50/125μm, 33m O	M2/OM1 62.5/125µm)	AXM761P10-10000S
AXM762	10GBASE-LR SFP+ LC Transceiver (single mod	de, 10km 9/125µm)		AXM762-10000S
AXM762 (pack of 10)	Pack of 10 AXM762 Transceivers (single mode	e, 10km 9/125µm)		AXM762P10-10000S
AXM763	10GBASE-LRM SFP+ LC Transceiver (multimod	le, 165m OM4/OM3 50/125µm, 100m	n OM2/OM1 62.5/125µm)	AXM763-10000S
AXM764	10GBASE-LR LITE SFP+ LC Transceiver (single	·		AXM764-10000S
AXM765	10GBASE-T SFP+ RJ45 Transceiver (80m)			AXM765-20000S
NETGEAR AV Line M4250	0-10G2F-PoE+ 8x1G PoE+ 125W 2x1G and 2xSFF	P Managed Switch (GSM4212P)		
Americas	GSM4212P-100NAS			
Europe	GSM4212P-100EUS	Optional AVB License	AVB4212P-10000S	
Asia Pacific	GSM4212P-100AJS	o paronary tro Electrice	7.12.12.1.100000	
China	GSM4212P-100PRS			
NETGEAR AV Line M425	0-10G2XF-PoE+ 8x1G PoE+ 240W 2x1G and 2xSI	FP+ Managed Switch (GSM4212PX)		
Americas	GSM4212PX-100NAS			
Europe	GSM4212PX-100EUS	Onting of AV/D Linear	AV/D 4212DV 10000C	
Asia Pacific	GSM4212PX-100AJS	Optional AVB License	AVB4212PX-10000S	
China	GSM4212PX-100PRS			
NETGEAR AV Line M425	0-10G2XF-PoE++ 8x1G Utra90 PoE++ 802.3bt 72	0W 2x1G and 2xSFP+ Managed Swi	itch (GSM4212UX)	
Americas	GSM4212UX-100NAS			
Europe	GSM4212UX-100EUS			
Asia Pacific	GSM4212UX-100AJS	Optional AVB License	AVB4212UX-10000S	
China	GSM4212UX-100PRS			
NETGEAR AV Line M425	0-26G4F-PoE+ 24x1G PoE+ 300W 2x1G and 4xSF	FP Managed Switch (GSM4230P)		
Americas	GSM4230P-100NAS			
Europe	GSM4230P-100EUS	Optional AVB License	AVB4230P-10000S	
Asia Pacific	GSM4230P-100AJS			
China	GSM4230P-100PRS			
NETGEAR AV Line M425	0-26G4F-PoE++ 24x1G Ultra90 PoE++ 802.3bt 1,	440W 2x1G and 4xSFP Managed Sw	vitch (GSM4230UP)	
Americas	GSM4230UP-100NAS			
Europe	GSM4230UP-100EUS	Optional AVB License	AVB4230UP-10000S	
Asia Pacific	GSM4230UP-100AJS	Optional AVD LICENSE	AVD=23001-100003	
China	GSM4230UP-100PRS			

AV Line Managed Switches

Datasheet | M4250 series

AV Line

Ordering Information

Ai	CCM4220DV 100NIAC	-	
Americas Europe	GSM4230PX-100NAS GSM4230PX-100EUS		
Asia Pacific	GSM4230PX-100EUS GSM4230PX-100AJS	Optional AVB License	AVB4230PX-10000S
China	GSM4230PX-100PGS		
	OG8F-PoE+ 40x1G PoE+ 480W and 8xSFP Mana	aged Switch (GSM/2/18P)	
		aged Switch (OSW+2+OF)	
Americas	GSM4248P-100NAS		
Europe	GSM4248P-100EUS	Optional AVB License	AVB4248P-10000S
Asia Pacific	GSM4248P-100AJS		
China	GSM4248P-100PRS		
NETGEAR AV Line M4250-4	0G8XF-PoE+ 40x1G PoE+ 960W and 8xSFP+ M	lanaged Switch (GSM4248PX)	
Americas	GSM4248PX-100NAS		
Europe	GSM4248PX-100EUS	Optional AVB License	AV/D4240DV 10000C
Asia Pacific	GSM4248PX-100AJS	Optional AVB License	AVB4248PX-10000S
China	GSM4248PX-100PRS		
NETGEAR AV Line M4250-4	0G8XF-PoE++ 40x1G Ultra90 PoE++ 802.3bt 2,	880W and 8xSFP+ Managed Swit	tch (GSM4248UX)
Americas	GSM4248UX-100NAS		
Europe	GSM4248UX-100EUS	0 : 10/01:	AV/D4040LIV/40000C
Asia Pacific	GSM4248UX-100AJS	Optional AVB License	AVB4248UX-10000S
China	GSM4248UX-100PRS		
NETGEAR AV Line M4250-1	2M2XF 12x2.5G and 2xSFP+ Managed Switch (MSM4214X)	
Americas	MSM4214X-100NAS		
Europe	MSM4214X-100EUS		
Asia Pacific	MSM4214X-100AJS	Optional AVB License	AVB4214X-10000S
China	MSM4214X-100PRS		
NETGEAR AV Line M4250-1	6XF 16xSFP+ Managed Switch (XSM4216F)		
Americas	XSM4216F-100NAS		
Europe	XSM4216F-100EUS	0 1 1 1 1 1 1	N /5 404 / 5 400000
Asia Pacific	XSM4216F-100AJS	Optional AVB License	AVB4216F-10000S
China	XSM4216F-100PRS		

NETGEAR, the NETGEAR Logo and ProSAFE are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. © 2022 NETGEAR, Inc. All rights reserved.

^{**} This product comes with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and covers unmodified hardware, fans and internal power supplies - not software or external power supplies, and requires product registration at https://www.netgear.com/business/registration within 90 days of purchase; see https://www.netgear.com/about/warranty for details. Intended for indoor use only.

HD-DA8-4KZ-E

1:8 HDMI® Distribution Amplifier w/4K60 4:4:4 & HDR Support

- > Splits one HDMI® source to eight outputs
- > Handles 4K60 4:4:4 and HDR video signals [1]
- > Fully compatible with HD 1080p, UHD 4K, and DCI 4K sources and displays
- > Handles 3D video and Deep Color
- > Handles Dolby® TrueHD, Dolby Atmos®, DTS HD®, DTS:X®, and uncompressed 7.1 linear PCM audio
- > Selectable handling of HDCP 2.2 or HDCP 1.4
- > EDID management options
- > Input and output video presence indication
- > No programming or control system required
- > Thin profile less than one inch deep
- > Surface, shelf, or single rack rail mountable
- > External 100-240V universal power pack included

The Crestron® HD-DA8-4KZ-E is a simple to use, high-performance 4K AV distribution amplifier designed to split a single HDMI® signal to feed up to eight separate displays, switchers, and/or other devices. It provides full support for UHD and DCI 4K60 4:4:4 and HDR video, HDCP 1.4 or 2.2 copy protection, and high-bitrate 7.1 audio, to ensure optimal performance and compatibility for any HD or 4K video application. No programming or control system is required for operation. [1]

For smaller applications, refer to models HD-DA2-4KZ-E and HD-DA4-4KZ-E.

SPECIFICATIONS

Video

Input Signal Type: HDMI w/HDR10, Deep Color, 3D, & 4K60 4:4:4 support [1] (DVI & Dual-Mode DisplayPort compatible [2])

Output Signal Type: HDMI w/HDR10, Deep Color, 3D, & 4K60 4:4:4

support [1] (DVI compatible [2])

Copy Protection: Selectable for HDCP 2.2, HDCP 1.4, or HDCP disabled

Maximum Resolutions:

Scan Type	Resolution	Frame Rate	Color Sampling	Color Depth
		24 Hz	4:4:4	36 bit
Progressive	4096x2160 DCI 4K & 3840x2160 4K UHD	30 Hz	4:4:4	36 bit
		60 Hz	4:2:2	36 bit
	OO TOXE TOO THE OTTE	60 Hz	4:4:4	24 bit
	2560x1600 WQXGA	60 Hz	4:4:4	36 bit
	1920x1080 HD1080p	60 Hz	4:4:4	36 bit
Interlaced	1920x1080 HD1080i	30 Hz	4:4:4	36 bit

NOTE: Common resolutions are shown; other resolutions are supported at pixel clock rates up to 600 MHz



Audio

Input Signal Type: HDMI (Dual-Mode DisplayPort compatible [2])

Output Signal Type: HDMI

Formats: Dolby Digital®, Dolby Digital EX, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos, DTS®, DTS-ES, DTS 96/24, DTS HD High Res, DTS HD Master

Audio, DTS:X, LPCM up to 8 channels

Communications

USB: USB 2.0 host; supports firmware update and custom EDID upload

via a USB flash drive

HDMI: HDCP & EDID (does not pass CEC)

HDCP Version: Selectable for HDCP 2.2, 1.4, or OFF;

HDCP encrypted content is blanked in OFF mode

EDID Mode: Selectable for DEFAULT or COPY 1ST;

- The factory default EDID is 4K60 4:4:4 non-HDR video with 2-channel LPCM audio;
- The factory default EDID can be replaced with a custom EDID via USB;
- Sliding the switch from DEFAULT to COPY 1ST copies and stores the EDID from the device at OUTPUT 1 and passes it to the INPUT source device:
- Sliding the switch from COPY 1ST to DEFAULT erases the stored EDID and uses the factory default or custom EDID;

Note: Changing the device at OUTPUT 1 will not update the stored EDID until the switch is moved to DEFAULT and back to COPY 1ST

Connectors

INPUT: (1) HDMI Type A connector, female;

HDMI digital video/audio input [1];

(DVI & Dual-Mode DisplayPort compatible [2])

OUTPUT 1 – 8: (8) HDMI Type A connectors, female;

HDMI digital video/audio outputs [1];

(DVI compatible [2])

SERVICE: (1) USB Type A connector, female;

USB 2.0 host port;

For firmware update and custom EDID upload via a USB flash drive



HD-DA8-4KZ-E 1:8 HDMI® Distribution Amplifier w/4K60 4:4:4 & HDR Support





HD-DA8-4KZ-E - Rear View

24VDC 0.75A: (1) 2.1 x 5.5 mm DC power connector;

24 Volt DC power input;

PW-2407WU power pack included

Controls & Indicators

PWR: (1) Bi-color LED, indicates operating power is supplied via the power pack; illuminates amber while booting, green when operating SETUP: (1) Pushbutton and (1) red LED, restores factory settings

RESET: (1) Recessed pushbutton for hardware reset

INPUT: (1) Green LED, indicates video signal presence at the HDMI input 0UTPUT 1-8: (8) Green LEDs, each indicates video signal transmission

at the corresponding HDMI output HDCP: (1) 3-position slide switch, selects the HDCP version (OFF, 1.4,

or 2.2)

EDID: (1) 2-position slide switch, selects the EDID mode (DEFAULT or COPY

Power

Power Pack (included): Input: 100-240 Volts AC, 50/60 Hz;

Output: 0.75 Amps @ 24 Volts DC;

Model: PW-2407WU

Power Consumption: 11.5 W (typical)

Environmental

Temperature: 32° to 104° F (0° to 40° C) Humidity: 10% to 90% RH (non-condensing)

Enclosure

Chassis: Metal, black finish, with (2) integral mounting flanges

Mounting: Freestanding, surface mount, or attach to a single rack rail

Dimensions

Height: 0.87 in (22 mm) Width: 12.82 in (326 mm) Depth: 4.67 in (119 mm)

Compliance

CE, IC, FCC part 15 Class B digital device

MODELS & ACCESSORIES

Available Models

HD-DA8-4KZ-E: 1:8 HDMI® Distribution Amplifier w/4K60 4:4:4 & HDR Support

Included Accessories

PW-2407WU: Wall Mount Power Pack, 24VDC, 0.75A, 2.1mm, Universal (Qty. 1 included)

Available Accessories

CBL-HD Series: High-Speed HDMI® Cables

Notes:

- 1. 4K60 4:4:4 and HDR support requires the use of HDMI cables and couplers with a minimum TMDS bandwidth of 18 Gbps. If 4K60 4:2:0 or 4K30 4:4:4 performance is acceptable, cables and couplers with a minimum bandwidth of 10.2 Gbps may be used. Please be aware that bandwidth loss is cumulative, so performance may be reduced when inserting multiple cables and couplers inline.
- HDMI requires an appropriate adapter or interface cable to accommodate a DVI or Dual-Mode DisplayPort signal. CBL-HD-DVI interface cables are available separately.


This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at https://www.crestron.com/How-To-Buy/Find-a-Representative or by calling 855-263-8754.

The specific patents that cover this and other Crestron products are listed online at https://www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, visit https://www.crestron.com/opensource.

Crestron and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Dolby, Dolby Atmos, and Dolby Digital are either trademarks or registered trademarks of Dolby Laboratories in the United States and/or other countries. DTS, DTS HD, and DTS:X are either trademarks or registered trademarks of DTS, Inc. in the United States and/or other countries. HDMI and the HDMI Logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice.

Agenda Item 9.(e) Approval of Quote Awards to multiple vendors for the I... **HD-DA8-4KZ-E** 1:8 HDMI® Distribution Amplifier w/4K60 4:4:4 & HDR Support

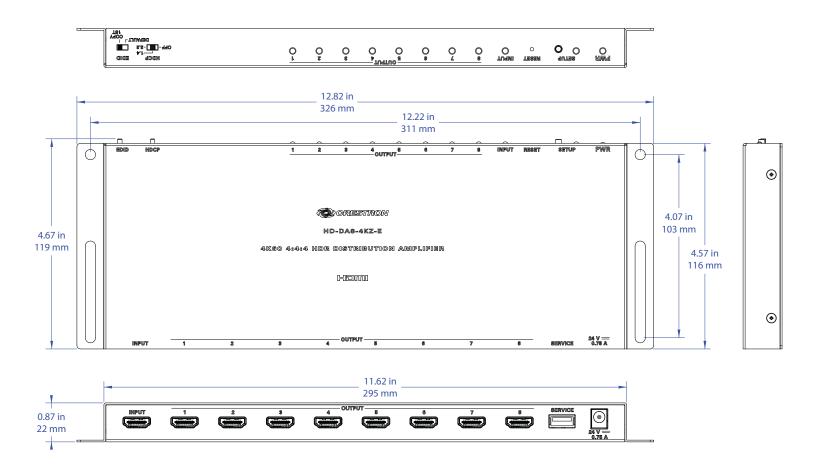



Q-SYS NV-21-HU

KEY FEATURES

- Single cable solution for video distribution, AV bridging¹, and device charging².
- Native HDMI video and audio distribution for Q-SYS
- Q-SYS Shift™ adaptive video compression
- · Software configurable as an encoder or decoder
- · HDMI and USB-C Mode selection



Q-SYS NV-21-HU

Native Network Video Endpoint for Q-SYS

The Q-SYS NV Series NV-21-HU enables native video distribution on the Q-SYS Platform. The NV-21-HU is a software configurable endpoint offering a comprehensive single-cable solution for video distribution, AV bridging, and device charging via USB-C. The NV-21-HU's compact size and reduced I/O make it ideal for supporting meeting rooms, learning spaces, hospitality and entertainment installations. The NV-21-HU can be used alongside other Q-SYS NV Series video endpoints, providing system design flexibility. Like all Q-SYS products, the NV-21-HU offers native integration and control, simplifying configuration and operation.

SINGLE CABLE SOLUTION

The Q-SYS NV-21-HU simplifies the user experience and intuitively supports a wide range of devices. A single USB-C connection to the NV-21-HU enables a user's device to distribute video formats up to 4K60 4:4.4 via Q-SYS ShiftTM video codec, integrates Q-SYS video camera and audio feeds into a supported collaboration application¹ and charges their device simultaneously².

MAXIMIZE FLEXIBILITY IN DESIGN & SPECIFICATION

The NV-21-HU is software-configurable as an encoder or decoder in Q-SYS Designer Software and offers the ability to operate in either HDMI or USB-C mode, supporting a broader range of user devices without adapters or converters. In addition, the NV-21-HU supports the AV Bridging feature license to function as an AV bridging endpoint when needed.

- HDMI Mode: In HDMI mode, the NV-21-HU
 enables video distribution from the HDMI input
 and uses the USB-C connection to offer AV
 bridging and device charging.
- USB-C Mode: In USB-C mode, the NV-21-HU enables video distribution, AV bridging and device charging via the USB-C connection.

RIGHT-SIZED

The NV-21-HU provides designers with a more compact endpoint within the NV Series. The smaller design and reduced I/O (compared to the Q-SYS NV-32-H) enable simple and scalable designs across various applications, including meeting rooms, learning spaces, hospitality, and entertainment installations.

DESIGNED FOR Q-SYS

Q-SYS NV Series network video endpoints are native to Q-SYS, which is powered by the Q-SYS OS; this software foundation manages NV Series endpoints and all other Q-SYS Products from a single application. The Q-SYS Platform's modern IT architecture and development tools enable an entire ecosystem of third-party integrations developed by approved Q-SYS Partners and a worldwide community of developers using the available tools found in Q-SYS Open.

- 1. Optional AV Bridging feature license is required to activate AV Bridging on the NV-21-HU.
- 2. An external power supply is required for any device charging over the USB-C connection. NV-21-PSU available separately.

Q-SYS NV-21-HU

CONTROL

 RS-232: Three Pin Euro terminal connection to control third-party devices with Q-SYS Control, user-configurable.

USB

- USB HID control: Control host PCs with a USB connection using USB HID components in Q-SYS Designer Software.
- Q-SYS AV Bridging: The Q-SYS AV Bridging feature license expands the functionality of the NV-21-HU, allowing users to connect their devices via USB-C directly to the network video endpoint to integrate Q-SYS audio and camera feeds for remote meetings easily. The NV-21-HU emulates a webcam (for video streams from Q-SYS network cameras), a speakerphone, and a multichannel soundcard over a single driverless USB connection.

AUDIO

- HDMI Audio Input: Receive up to 8 channels of PCM audio from your video source, which are routable within Q-SYS Designer Software.
- USB-C Audio Input: Receive up to 8 channels of PCM Audio from your video source, which are routable within Q-SYS Designer. Additional 1x1 Speakerphone and 2x2 Soundcard options are available with the Q-SYS AV Bridging feature license.
- HDMI Audio Output: Embed up to 8 channels of PCM audio from Q-SYS to
 the HDMI output of the NV-21-HU to utilize the built-in speakers of a display
 as a Q-SYS audio destination for source audio content or any other audio,
 including paging, background music, etc.

SECURITY AND AUTHENTICATION

- AES-128: NV Series supports AES-128 encryption for audio and video signals from encoders to decoders
- Content Protection: HDCP 1.4 & HDCP 2.3 complaint
- 802.1x: 802.1x authentication is available and configurable through Q-SYS Peripheral Manager

Q-SYS SHIFT™ ADAPTIVE BITRATE CODEC

The NV-21-HU uses Q-SYS ShiftTM video compression to provide high-quality, low-latency video streaming supporting video formats up to 4K60 4:4:4 over a standard gigabit network. Q-SYS ShiftTM leverages DCT and temporal compression technologies, much like those found in H.264 and H.265 video compression codecs. Q-SYS optimized ShiftTM to provide flawless image quality from the most demanding content sources. Further, ShiftTM intelligently manages and optimizes the resulting network bitrate by only refreshing changes within each frame, allowing for significantly reduced bandwidth usage as compared to other compression codecs.

Modes: Multicast and Unicast

Bitrates: 10 Mbps - 800 Mbps

Streaming Protocol: RTP

SUPPORTED VIDEO FORMAT

Resolution	Frame rate (Hz)	Chroma sampling level	Bit Depth
3840 x 2160 (4K UHD)	60, 59.94, 50, 30, 29.97, 25, 24	4:4:4	8 bit
3440 x 1400	60	4:4:4	8 bit
2560 x 1600	60	4:4:4	8 bit
2560 x 1440	60	4:4:4	8 bit
2560 x 1080	60, 59.94, 50, 30, 29.97, 25, 24	4:4:4	8 bit
1920 x 1200	60	4:4:4	8 bit
1920 x 1080 (1080 p)	60, 59.94, 50, 30, 29.97, 25, 24	4:4:4	8 bit
1920 x 720 (720 p)	60, 59.94, 50, 30, 29.97, 25, 24	4:4:4	8 bit
640 x 480	60	4:4:4	8 bit

^{*} All video formats are progressive
4:2:0 Chroma subsampling and HDR not supported

SCALER

The NV-21-HU features a robust 4K60 4:4:4 scaler that can accommodate the most challenging resolution and frame rate conversions from network streams or local HDMI and USB-C sources. The scaler is capable of operating in three modes (configurable within Q-SYS Designer Software):

- Stretch-to-fit
- Maintain aspect ratio
- 1:1 pixel mapping

Q-SYS NV-21-HU

CONNECTORS

- Power In: Two-pin euroblock terminal connection for an external 12 V DC, 9
 A power supply (not included, NV-21-PSU available separately). An external power supply connection is required for any device charging over the USB-C connection.
- POE/LAN: Connection to Q-LAN network; includes PoE Type 3, Class 5
 capability via a network switch or midspan injector. When powered via PoE,
 the NV-21-HU cannot charge devices over the USB connection.
- USB-A: Reserved for future use
- RS-232: Three-pin euroblock terminal connection for extension of the Q-SYS Control Engine to third-party devices.
- USB-C: USB-C connection capable of receiving alt-mode DisplayPort video formats up to 4K60 4:4:4, Q-SYS Audio and Video Bridging and device charging up to 65 W. An external power supply is required for any device charging over the USB-C connection.
- HDMI IN: HDMI connection capable of receiving video formats up to 4K60 4:4:4, up to 8 channels PCM Audio from a connected source.
- **HDMI OUT:** HDMI connection capable of transmitting video formats up to 4K60 4:4:4, up to 8 channels PCM Audio to a connected output.
- Simple Mounting: Optional surface mounting brackets (included) provide installers with multiple options to optimize airflow in various installation scenarios. Mounting options and installation instructions are available in the hardware user guide.



Q-SYS NV-21-HU Video I/O HDMI 2.0 input 1x HDMI 2.0, capable of receiving input video formats up to 4K60 4:4:4 USB 3.2 Gen 1x1 (5Gbps) Type-C Device Port - supporting DisplayPort Alt-Mode (DP 1.4 Sink) USB-C input - USB Power Delivery up to 65W 1x HDMI capable of scaling and outputting video formats up to 4K60 4:4:4 HDMI 2.0 output HDMI output features a robust 4K60 4:4:4 scaler that can accomodate the most challenging resolution and frame rate Scaler conversions. Audio I/O 8-channel PCM audio, Q-SYS routable HDMI inputs USB Type C input 8-channel PCM audio, 1x1 speakerphone¹, 2x2 soundcard¹, Q-SYS routable HDMI output 8-channel PCM audio, Q-SYS routable Other connectors AV Bridging: Route Q-SYS network camera and audio feeds to a host via USB connection¹. Device Charging: Supports charging up to 65 Watts³ USB Type C input - 3A: 5V, 9V, 12V, 15V - 3.25A: 20V Reserved for future use USB Type A input - 5V, 900 mA 1000BASE-T, 2.5GBASE-T compliant LAN Power Over Ethernet PoE Type 3, Class 5 (40W at PD, 45W at PSE)² **Auxiliary Power Supply** 12 V DC 9 A Power Supply. NV-21-PSU sold separately³ General Dimensions $7.3 \times 5.2 \times 1.2$ in (185 x 131.5 x 30.5 mm) 1.75 lbs (794 g) Weight Flexible surface mounting hardware included Mounting options **Environmental** Ambient operating temperature range 0° to 40° C 5 to 90 RH % non-condensing Humidity -20 to 70° C Storage temperature **Expected Product lifecycle** 10 years NV-21-HU video endpoint Euro Terminal connector for RS-232 What's in the box? Surface mounting accessories Safety and warranty statements 1. Requires Q-SYS AV Bridging feature license.

^{2.} When powered via PoE, the NV-21-HU cannot charge devices over the USB-C connection.

^{3.} An external power supply is required for any device charging over the USB-C connection.

Detailed Specification & Technical Data





254346A

4 Pair 23AWG UTP Cat6A 10G CMP - Small OD

Suitable Applications: Premise Horizontal Cable, Ethernet 10GBASE-T, Wi-Fi 6, Wi-Fi 5, In-Building Wireless, In-Building Small Cells, Mobile RAN, PoE++, PoE

Construction & Dimensions

CONDUCTOR PARAMETERS	
Number Of Pairs	4
AWG Size	23
Conductor Stranding	Solid
Conductor Type	Bare Copper
Nominal DCR	21 Ohm/1000ft
INSULATION PARAMETERS	
Insulation Type	Flouropolymer - FEP
Insulation Color Code	White & Blue, White & Orange, White & Green, White & Brown
SHIELDING PARAMETERS	
Shield Type	Unshielded Twisted Pair (UTP)
ELECTRICAL CHARACTERISTICS	
Nominal Impedance	100 Ohm
Nominal Capacitance Between Conductors	13 pF/ft

Overall Construction

OVERALL CONSTRUCTION PARAMETERS	-
Total Number of Conductors	8
Jacket Type	Flexible Plenum
Nominal Cable O.D.	.250in
Plenum	Yes
NEC UL Rating	CMP, CMP-LP
RoHS Compliant	Yes
ANSI/TIA Category	ANSI/TIA-568.2-D Category 6A
TIA Test	Category 6A
Pull Tension	25 lbs
Bend Radius	1.25 in
Cable Weight	37 lbs

Overall Electrical & Optical Characteristics

OVERALL ELECTRICAL/OPTICAL CHARACTERISTICS	-
Nominal Velocity of Propagation (VP)	69 %
Delay Skew	45 ns/100m
UL Flammability	NFPA 262 Plenum
CSA Flammability	FT6
Operating Range	-20 to 75 Deg C
UL Voltage Rating	300

Agenda Item 9.(e) Approval of Quote Awards to multiple vendors for the I Detailed Specification & Technical Data





254346A

Electrical Performance

Frequency (Mhz)	Max. Insertion Loss	Min. NEXT	Min. PSNEXT	Min. PSACR	Min. ACR	Min. PSACRF (PSELF- EXT)	Min. ACRF (ELF- EXT)	Min. PSAACRF	Min. RL (Return Loss)	Min. TCL	Min. ELTCTL	Max/Min Input Imp. Unfit	Max/Min Fitted Imp.
1 MHz	2.1 db/100m	75.3 dB	73.3 dB	71.2 dB	65 dB	68.8 dB	68 dB	67 dB	20 dB	40 dB	35 dB	100 ± 15 Ohm	100 ± 15 Ohm
4 MHz	3.8 db/100m	66.3 dB	64.3 dB	60.5 dB	53 dB	56.8 dB	56 dB	67 dB	23 dB	40 dB	23 dB	100 ± 15 Ohm	100 ± 15 Ohm
8 MHz	5.3 db/100m	60.8 dB	59.6 dB	54.4 dB	46.7 dB	50.7 dB	49.7 dB	61.1 dB	24.5 dB	40 dB	17 dB	100 ± 15 Ohm	100 ± 15 Ohm
10 MHz	5.9 db/100m	60.3 dB	58.3 dB	52.4 dB	45 dB	48.8 dB	48 dB	59.2 dB	25 dB	40 dB	15 dB	100 ± 15 Ohm	100 ± 15 Ohm
16 MHz	7.5 db/100m	57.2 dB	55.2 dB	47.8 dB	41 dB	44.7 dB	43.9 dB	55.1 dB	25 dB	40 dB	10.9 dB	100 ± 15 Ohm	100 ± 15 Ohm
20 MHz	8.4 db/100m	54.8 dB	53.8 dB	45.4 dB	38.8 dB	42.8 dB	41.8 dB	53.2 dB	25 dB	38 dB	9 dB	100 ± 15 Ohm	100 ± 15 Ohm
25 MHz	9.4 db/100m	53.3 dB	52.3 dB	43 dB	36.8 dB	40.8 dB	39.8 dB	51.2 dB	24.3 dB	38 dB	7.1 dB	100 ± 15 Ohm	100 ± 15 Ohm
31.25 MHz	10.5 db/100m	52.9 dB	50.9 dB	40.4 dB	35.1 dB	38.9 dB	38.1 dB	49.3 dB	23.6 dB	35.1 dB	5.1 dB	100 ± 15 Ohm	100 ± 15 Ohm
62.5 MHz	15 db/100m	48.4 dB	46.4 dB	31.4 dB	29.1 dB	32.9 dB	32.1 dB	43.3 dB	21.5 dB	32 dB		100 ± 15 Ohm	100 ± 15 Ohm
100 MHz	19.1 db/100m	45.3 dB	43.3 dB	24.2 dB	25 dB	28.8 dB	28 dB	39.2 dB	20.1 dB	30 dB		100 ± 15 Ohm	100 ± 15 Ohm
155 MHz	24.1 db/100m	41.4 dB	39.4 dB	18.9 dB	22.1 dB	27.1 dB	25.6 dB	37.1 dB	19.2 dB	29 dB		100 ± 15 Ohm	100 ± 15 Ohm
200 MHz	27.6 db/100m	40.8 dB	38.8 dB	11.2 dB	19 dB	22.8 dB	22 dB	33.2 dB	18 dB	27 dB		100 ± 15 Ohm	100 ± 15 Ohm
250 MHz	31.1 db/100m	39.3 dB	37.3 dB	6.3 dB	17 dB	20.8 dB	20 dB	31.2 dB	17.3 dB	26 dB		100 ± 15 Ohm	100 ± 15 Ohm
300 MHz	34.3 db/100m	38.1 dB	36.1 dB	1.9 dB	15.5 dB	19.3 dB	18.5 dB	29.7 dB	16.8 dB	25.2 dB		100 ± 15 Ohm	100 ± 15 Ohm
350 MHz	37.2 db/100m	36.1 dB	35.1 dB		13.9 dB	17.9 dB	16.9 dB	28.3 dB	16.3 dB	24.6 dB		100 ± 15 Ohm	100 ± 15 Ohm
400 MHz	40.1 db/100m	35.3 dB	34.3 dB		12.8 dB	16.8 dB	15.8 dB	27.2 dB	15.9 dB	24 dB		100 ± 15 Ohm	100 ± 15 Ohm
450 MHz	43.3 db/100m	34.8 dB	35.5 dB		12.1 dB	15.7 dB	14.8 dB	26.1 dB	15.5 dB	23.5 dB		100 ± 15 Ohm	100 ± 15 Ohm
500 MHz	45.3 db/100m	34.8 dB	32.8 dB		11 dB	14.8 dB	14 dB	25.2 dB	15.2 dB	23 dB		100 ± 15 Ohm	100 ± 15 Ohm
550 MHz	48.2 db/100m	34.1 dB	32.2 dB		10.5 dB	14 dB	13.2 dB	24.45 dB	14.9 dB			100 ± 15 Ohm	100 ± 15 Ohm

Related Products

RELATED PRODUCTS	-
Non Plenum Item	4346A
Jack	KJ458MT-C6AC-xx
Modular Plug	CN-CAPFMUL-S1
Modular Plug 2	32-EZEx48 - Use Tool: TL-EXOCRIMP

Channel Reach -PoE

POE	10BaseT	100BaseT	1000BaseT	2.5G/5GBaseT	10GBaseT
15W PoE (Type 1)	140m (459 ft)	140m (459 ft)	100m (328 ft)	100m (328 ft)	100m (328 ft)
30W PoE (Type 2)	130m (426 ft)	130m (426 ft)	100m (328 ft)	100m (328 ft)	100m (328 ft)
60W PoE (Type 3)	130m (426 ft)	130m (426 ft)	100m (328 ft)	100m (328 ft)	100m (328 ft)
100W PoE (Type 4)	120m (394 ft)	120m (394 ft)	100m (328 ft)	100m (328 ft)	100m (328 ft)

Page 168 of 206





DATA SHEET

C2G Performance Series Ultra Flexible High Speed HDMI® Cable - 4K 60Hz In-Wall, CMG (FT4) Rated

Extend HDMI signals over a high performance HDMI cable and support HDMI audio and video features including 4K Ultra HD

OVERVIEW

The C2G Performance Series Ultra Flexible High Speed HDMI Cable is perfect for connecting a wide variety of devices from computers to projectors and monitors, AV presentation furniture, or in-wall applications requiring high speed HDMI features and video resolutions up to 4k (4096 x 2160) at 60Hz — perfect for conference rooms, classrooms, churches, and other commercial installations.

This Ultra Flexible High Speed HDMI Cable was designed for installations in tight spaces and offers commercial grade connectors that feature compact overmolding for high density environments, integrated finger grips on the top, bottom, and sides, for easy insertion and removal, and the gripping connector shell has 2x greater port retention to keep your devices connected. The gold plated connectors on the cable allow for better shielding, increased electrical conductivity, and durability.

This Ultra Flexible High Speed HDMI Cable supports the updated library of Consumer Electronic Control (CEC) commands, allowing communication between devices connected through the HDMI ports. Lastly, this fully-functional, high bandwidth cable has been tested to perform at industry standards and is backed by a lifetime warranty.

FEATURES

- Supports all HDMI 2.0 features including resolutions up to 4K (4096 x 2160) at 60hz, which means higher quality video for viewing your screen content
- In-wall (CMG/FT4) rated jacket, so you can safely run the cable inside of a wall and have a clutter free, clean look
- Integrated finger grips on the connectors for easy insertion and removal
- Gripping connector shell for 2x greater port retention
- Gold plated connectors for increased electrical conductivity and enhanced durability
- Directional cable with source connector labeled and tagged to easily differentiate from the labeled display connector
- Supports CEC extensions for control of consumer electronics devices through a single control point
- Backed by a Lifetime Warranty for peace of mind

ITEM DESCRIPTION

1ft (0.3m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
18in (0.5m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
2ft (0.6m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
2ft (0.9m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
3ft (0.9m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
6ft (1.8m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
10ft (3m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated


DATA SHEET

SIGNAL SPECIFICATIONS

- Supports HDMI Resolutions up to 4K 60Hz, 4:4:4, 18 Gbps
- Supports Full HD Blu-ray Disc and HD DVD Video
- Supports 3D Video
- Perceptual Quantizer (PQ HDR OETF (SMPTE ST 2084)
- Hybrid Log-Gamma (HLG) HDR OETF
- Static HDR Metadata (SMPTE ST 2086)
- DVD Audio, Super Audio CD (DSD)
- Dolby® True HD, DTS-HD Master Audio Bitstream Capable
- 4 Audio Streams
- Ethernet Channel: 100 Mbit/s
- Consumer Electronic Control (CEC), with Updated List of CEC Commands

ELECTRICAL SPECIFICATIONS

- Voltage Rating: 30V
- Temp: Connector: Temp Rating: 220°C
- Cable: Temp Rating: 75°CConductor Resistance: 5Ω
- Insulation Resistance: 10MΩ
- Differential Data Input Voltage: 4.8V to 5.3VDifferential Data Output Voltage: 4.7V to 5.3V




PHYSICAL SPECIFICATIONS

- Operating Temperature: -20°C to +75°C; 85% RH (Non-Condensing)
- Storage Temperature: -10°C to +55°C; 85% RH (Non-Condensing)
- Tensile Strength: 100N
- Minimum Bend Radius: 48
- Cable Jacket Ratings: CMG FT4
- Connector Gripping Force: HDMI Withdrawl Force: 3.12 to 3.28kgf (9.8N/1.0kgf Min; 39.2N/4.0kgf Max)
- Connector Gripping Force: HDMI Insertion Force: 2.54 to 2.61kgf (44.1N/4.5kgf Max)

PHYSICAL CHARACTERISTICS

- Material: Housing: PVC Molding
- SR-Mold: PVC, Color: Black
- Jacket Color: Black
- Connector Insulator: Blue; Front of the Housing: Blue; "C2G"
- Jacket OD: 6.00±0.20mm; Jacket Material: PVC; Jacket Thickness: 0.56mm (REF)
- Shield Drain: 7/0.10T (30AWG); Shield AL/Mylar: AL Face Inside; Shield Mylar; Transparent Mylar Tape
- Shield Filler: Filler; Shield Paper: Paper: Paper; Shield Consitution N/mm: 16/9/0.08; Shield Material: Tinned Copper; Shield Coverage %: 65%
- Connector: HDMI Type A Male Connector, Metal Shell Gold Plated, Electrical Contact Copper; Alloy Gold Plated 5u, Insulator Color: Blue
- Cable UL/CUL/CSA Rating: Type: (7/0.10T*1P+D+AL+MY)
 *5C+7/0.10T*3C+7/0.127T*1C+F+Paper+B16/9/0.08T OD:
 6.00mm;
- Cable UL/CUL/CSA Rating: Print: High Speed HDMI Cable With Ethernet E468040 (UL) CL2 75°C 30AWG
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2



C2G

A brand of 📮 legrand®

c2g.com | legrandav.com USA 800.CABL.911

trg@c2g.com

©2021 Legrand AV Inc. 200991 US 02/21 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

COMMERCIAL AV BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold



ATEM 1 M/E Production Studio 4K



The advanced ATEM 1 M/E Production Studio 4K model switches between SD, HD or Ultra HD video standards so you can connect a wide range of video sources such as cameras, disk recorders and computers. Featuring 10 inputs, chroma keys, transitions, media pool, 4 upstream keyers, downstream keyers, audio mixer, multi view, full motion DVE, stinger transitions, large media pool with full motion clips and 3 auxiliary outputs!

\$2,705

Connections

Total Video Inputs

11 with 10 active.

Total Video Outputs

10

Total Aux Outputs

3

SDI Rates

270Mb, 1.5G, 3G, 6G

Total Audio Inputs

2 x XLR. 2 x RCA.

Total Audio Outputs

2 x XLR Program.

Timecode Connections

None

Reference Input

Tri-Sync or Black Burst.

Video Input Re-Sync

On all 10 inputs.

SDI Video Inputs

10 x 10-bit SD/HD/Ultra HD 4K switchable. 2 channel embedded audio.

HDMI Video Input

1 x HDMI type A. 10-bit SD/HD/Ultra HD 4K switchable. 2 channel embedded audio.

Analog Audio Outputs

2 x XLR.

SDI Audio Outputs

2 Ch embedded into SDI output on all outputs.

SDI Program Outputs

2 x 10-bit SD/HD/Ultra HD 4K switchable.

HDMI Program Outputs

1 x HDMI type A, 10-bit SD/HD/Ultra HD 4K switchable.

Down Converted SDI

Program Output

1 x 10-bit (Ultra HD 4K to HD)

SDI Preview Output

1 x 10-bit SD/HD/Ultra HD 4K switchable.

Total Multi Views

1

SDI Multi View Outputs

1

HDMI Multi View Outputs

1

Control Panel Connection


Ethernet supports 10/100/1000 BaseT. Allows direct connection between panel and chassis, or via network.

Tally Output

Added via ethernet connection to Blackmagic Design GPI and Tally Interface product. (Not included.)

Computer Interface

1 x USB 2.0 port.

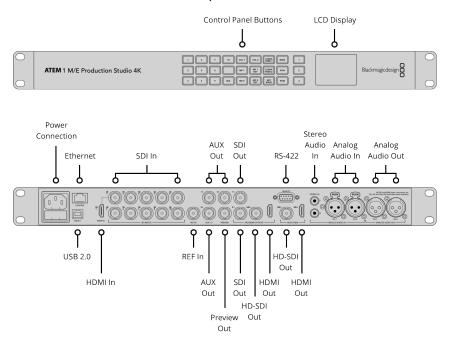

Standards

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p50, 1080p59.94 1080i50, 1080i59.94

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25, 2160p29.97

SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE 424M.

Video Sampling

4:2:2.

Color Precision

10-bit

Color Space

REC 601, REC 709, REC 2020.

HDMI Input Resolutions

for Computers

720 x 480i 59.94Hz, 720 x 576i 50Hz, 1280 x 720 59.94Hz, 1280 x 720 50Hz, 1920 x 1080 50Hz, 1920 x 1080 59.94Hz, 3840 x 2160 23.98Hz, 3840 x 2160 24Hz, 3840 x 2160 25Hz,

3840 x 2160 29.97Hz.

Product Specifics

Upstream Keyers

4 with Chroma/Linear/Luma key.

Downstream Keyers

2

Talkback Support

None

Mix Minus Support

None

Chroma Keyers

4

Linear/Luma Keyers

7

Transition Keyer (Stinger/DVE)

1 Stinger, 1 DVE.

Total Number of Layers

8

Pattern Generators

7

Color Generators

2

DVE with 3D Borders &

Drop Shadow

1

Control Panel Compatibility

ATEM 1 M/E Broadcast Panel preferred. Compatible with

ATEM 1 M/E Advanced Panel,

ATEM 2 M/E Advanced Panel and

ATEM 4 M/E Advanced Panel. Includes

ATEM Software Control Panel.

Media Player

Media Players

2

Channels

Channels

Media Pool Still Image Capacity

32 with fill and key.

Media Pool Clip Capacity

2 with fill and key.

Media Player Clip Length in 720 HD

1600 frames.

Media Player Clip Length in 1080 HD

720 frames.

Media Player Clip Length in

Ultra HD

180 frames.

Maximum Clip Length in NTSC/PAL

3600 frames.

Media Pool Still Image Format

PNG, TGA, BMP, GIF, JPEG and TIFF.

Media Pool Video File Format

TGA Sequence.

Media Pool Audio File Format

WAV, MP3 and AIFF.

Multi View Monitoring

Multi View Monitoring

1 x 10 views.

Routable Windows

8

Tally

Red for program and green for

preview indication.

Windows Source Labels

Yes

Multi View Video Standard

HD

Display

Interface

Minimum monitor resolution of

1366 x 768.

Front Panel

Built in LCD monitor for video

and 42 LED buttons for

Aux switching.

Processing

Colorspace Conversion

Hardware based real time.

Processing Delay

< 2 Lines.

Audio Mixer

12 input x 2 channel mixer. Selectable On/Off/Audio-Follow-

Video.

Level and Peak metering. Master gain control.

Analog outputs may be used for

separate monitoring.

4K to HD Down Conversion

Yes, program x 1.

Software

Control Panel Included

ATEM Software Control Panel included free for Mac 10.12 Sierra, Mac 10.13 High Sierra or later and Windows 8.1 64-bit or Windows 10 64-bit.

Software Updates

Using USB 2.0 connection directly connected to Mac OS or Windows computers. Includes ATEM Setup Utility

Configuration

Set via ATEM Software Control Panel, excluding
ATEM chassis IP address which is set via the ATEM Setup Utility connected via USB to chassis.

Operating Systems



Mac 10.14 Mojave, Mac 10.15 Catalina or later.




Windows 8.1 and 10.

Power Requirements

Power Supply

1 x Internal 100 - 240V AC.

Physical Specifications



Physical Installation

Physical Installation

1 Rack Unit Size.

Environmental Specifications

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

0% to 90% non-condensing

Agenda	Item 9.(e) Approval of Quote Awards to multiple vendors for the I
	What's Included
	ATEM 1 M/E Production Studio 4K Welcome wallet with QR code for software download
	Warranty
	12 month Limited Manufacturer's Warranty.
	All items on this website are copyright Blackmagic Design Pty. Ltd. 2024, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. Privacy Policy
	Blackmagic Design Authorized Reseller



Q-SYS NC-110 Q-SYS NC-12x80 Q-SYS NC-20x60

KEY FEATURES

- NC-110: fixed-lens, electronic pan, tilt, zoom (ePTZ) with 110° horizontal field of view
- NC-12x80: 12x optical zoom, 80° horizontal field of view
- NC-20x60: 20x optical zoom, 60° horizontal field of view
- Professional quality video conferencing for the Q-SYS AV-to-USB bridging solution
- Distribute video via the Q-LAN network anywhere it is needed
- Add as many network-based NC Series cameras to a design as needed to enable multi-camera functionality when integrating web conferencing platforms
- Distribute video via the Q-LAN network anywhere it is needed
- Simultaneously stream IP feeds and HDMI or SDI (PTZ models only)
- User-configurable resolution and quality for IP streams (up to 1080p), providing greater flexibility for a wide variety of use cases
- Comprehensive management via Q-SYS Designer Software and Q-SYS Reflect Enterprise Manager
- Complete camera imaging controls, including white balance, focus and exposure
- Image Rotation control inverts the video when the camera is mounted upside down. For PTZ cameras, the optional ceiling mount accessory is the PTZ-CMB1
- · Power over Ethernet
- Local 12 V connection for PTZ models (power supply not included)
- PTZ models include PTZ-WMB1 wall mount bracket for simple installation; ePTZ model has built-in mounting hardware
- Includes lens cover for privacy (NC-110 only)



Q-SYS NC Series Cameras

Network cameras for collaboration

The Q-SYS NC Series conference cameras deliver high-quality video feeds natively to the Q-SYS Platform. With three models to choose from, these network cameras offer a simple and scalable video solution for any size meeting space.

Driven by the Q-SYS OS, the NC Series integrate seamlessly into any Q-SYS system, allowing for easy camera feed routing anywhere on the network without the need for complicated programming or video matrix hardware. These camera video feeds are delivered to any modern video conferencing applications such as Microsoft Teams, Zoom, Google Meet, and Cisco Webex via any Q-SYS AV bridging peripheral

BENEFITS

Rightsized camera options: Choose the right camera for your room. The Q-SYS NC-110 EPTZ camera drives the Q-SYS AV bridging solution into smaller, wider or more value-engineered room types and applications, while the Q-SYS NC-12x80 and Q-SYS NC-20x60 deliver professional PTZ functionality and presets, enabling larger and/or reconfigurable room layouts.

Network transport, USB delivery: NC Series solves the cable length limitations of traditional cameras solutions by enlisting a single network cable for video, power and control data transport into Q-SYS, and then employs USB technology to deliver the video to its intended PC/compute device. This greatly simplifies system design and deployment by eliminating the need for costly, unreliable USB cabling. Furthermore, NC Series goes beyond the traditional 1-to-1 limitation found in most USB cameras by allowing for a "many-to-any" scenario that allows users to integrate as many NC Series cameras as needed in their Q-SYS system design

and take advantage of network-based realtime camera switchina

Multiple camera support for UC platforms: Q-SYS uses the power of the network (rather than dedicated switching hardware) to allow you to add as many NC Series cameras to your system as you desire and do live switching between the cameras, all while delivering a singular UYC/UAC stream to your application of choice

Universal Compatibility: The feeds from NC Series cameras, along with Q-SYS room audio, can be delivered to the conferencing application of your choice. With this functionality, Q-SYS can scale the meeting experience for Zoom, Microsoft Teams, Google Meet, Cisco Webex and more into rooms of any size or configuration to ensure a great experience parity for both in-room and remote meeting participants.

Designed for Q-SYS: NC Series collaboration cameras are native to Q-SYS, a cloud-manageable audio, video and control platform, built to deliver scalable, flexible AV solutions into the future. At its foundation, the Q-SYS OS serves as the software foundation that manages your NC Series cameras along with a multitude of other native Q-SYS Products in the platform. Additionally, its modern IT architecture and development tools of the Q-SYS Platform enables an entire Ecosystem of third-party devices developed by approved Q-SYS Partners, as well as a worldwide community of Q-SYS developers.

	NC-12x80	NC-20x60	NC-110	
System Details				
Description	Network PTZ con	ference camera	Network EPTZ conference camera	
Image sensor	1/2.8" low-noise CMOS	1/1.8" low-noise CMOS	1/2.8" low-noise CMOS	
Lens characteristics (wide to tele)	12x optical zoom f=3.47 to 41.65 mm F1.84 to F3.72	20x optical zoom f=6.25 to 125 mm F1.58 to F3.95	Fixed focus Lens 8x max zoom, 2x lossless f=1.86 mm Supports EPTZ	
System scanning mode	Progressive			
Signal-to-noise ratio		≥ 55 dB		
Horizontal rotation range	± 17	0°	Supports EPTZ	
Vertical rotation range	-30° to	+90°	Supports EPTZ	
Pan speed range	1.7° to 1	1.7° to 100°/s		
Tilt speed range	1.7° to 6	99.9°/s		
Horizontal and vertical flip		Supported (enables ceiling-r	nounted installations)	
Camera Imaging				
Minimum illumination	0.5 Lux @ (F1.8, AGC ON)			
Shutter	1/30s to 1/1000s			
White balance	Auto, indoor, outdoor, one push, manual, specified color temperature			
Digital noise reduction	3D digital noise reduction			
Supported Video Formats				
Supported bridging formats	Core Nano, Core 8 Flex, NV-32-H (Core Capable), I/O-USB Bridge: MJPEG & YUY2			
	Core 110f: YUY2 (360p max resolution on USB 2.0, 1080p30 max resolution on USB 3.0			
Supported bridging resolutions	1080p: 30, 15 fps 720p: 30, 15 fps 360p: 30, 15 fps 180p: 30, 15 fps			
IP stream resolutions (preview window)	H.264 @ 360p, 270p or 180p			
HDMI output (RGB 4:4:4 8 bit)	2160p @ 25, 2 1080p @ 25, 29.97, 3 1080i @ 50, 5 720p @ 30, 50,	0, 50, 59.94, 60 fps 59.94, 60 fps	No HDMI output	
3G-SDI output	1080p @ 25, 29.97, 3 1080i @ 50, 5 720p @ 50, 5	9.94, 60 fps	No SDI output	
Power				
DC power input	12 V (±20%), 12 W, JEITA connector		N/A	
Power over Ethernet (PoE)	PoE Type 1, Class 3		PoE Type 1, Class 2	
Power consumption	12.95 W max 6.4 W max		6.4 W max	
General Specifications				
Network interface	1000BaseT (IEEE 802.3ab) Ethernet interface			
Operating temperature	0°C - 40°C			
Storage temperature	-40°C - 60°C			
Size	6.7 x 7.95 x 5.6 in (17	70 x 201 x 142 mm)	$7.6\times2.2\times3.8$ in (194.5 \times 54.7 \times 95.7 mm), with brack	
		1.6 kg)	0.9 lbs (0.4 kg), with bracket	

Q-SYS NC Series Cameras









NC-12x80





NC-20x60





MXA920

Specifications

Specifications for Shure MXA920-S and MXA920-R ceiling array microphones.

Version: 0.1 (2022-D)

Table of Contents

MXA920 Specifications

MXA920 Frequency Response	4
Dimensions	5

MXA920 Specifications

General

Coverage Type

Automatic or steerable

Power Requirements

Power over Ethernet (PoE), Class 0

Power Consumption

10.1 W maximum

Control Software

Designer or web application

Plenum Rating

MXA920-S	UL2043 (Suitable for Air Handling Spaces)
MXA920-R	Not rated

Dust Protection

IEC 60529 IP5X Dust Protected

Operating Temperature Range

-6.7°C (20°F) to 40°C (104°F)

Storage Temperature Range

-29°C (-20°F) to 74°C (165°F)

Networking

Cable Requirements

Cat5e or higher (shielded cable recommended)

Connector Type

RJ45

Audio

AES67 or Dante Digital Output

Channel Count

	Automatic coverage off	10 total channels (8 independent transmit channels, 1 automix output, 1 AEC reference in channel)
Sampling	Rate	48 kHz
Bit Depth		24

Sensitivity

at 1 kHz

-1.74 dBFS/Pa

Maximum SPL

Relative to 0 dBFS overload

95.74 dBSPL

Signal-to-Noise Ratio

Ref. 94 dBSPL at 1 kHz

75.76 dB A-weighted

Latency

Does not include Dante latency

Direct outputs (Automatic coverage off)	15.9 ms
Automix output (Includes IntelliMix processing)	26.6 ms

Self Noise

18.24 dB SPL-A

Dynamic Range

77.5 dB

Digital Signal Processing

Automatic mixing, acoustic echo cancellation (AEC), noise reduction, automatic gain control, compressor, delay, equalizer (4-band parametric), mute, gain (140 dB range)

Acoustic Echo Cancellation Tail Length


Up to 250 ms

Frequency Response

125 Hz to 20,000 Hz

MXA920 Frequency Response

Frequency response measured directly on-axis from a distance of 6 feet (1.83 m).

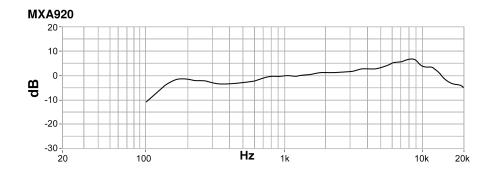

Dimensions

Weight

MXA920-S: 11.8 lbs (5.4 kg)MXA920-R: 12.7 lbs (5.8 kg)

MXA920-S



- A (Microphone flange): 0.41 in. (10.5 mm)
- B (Edge to edge): 23.77 in. (603.8 mm)
- C (Height): 2.15 in. (54.69 mm)

MXA920-S-60CM



- A (Edge to edge): 23.38 in. (593.8 mm)
- B (Height): 2.15 in. (54.69 mm)

MXA920-R



- A (Height to top of eyelets): 2.4 in. (61.3 mm)
- B (Outer diameter): 25 in. (635.4 mm)





Core 1000 | Core 3000 | Core 4000 | I/O Frame



Q-Sys™ is a complete integrated system that encompasses everything from the audio input to the output of the loudspeakers; it provides all the routing, processing, control and monitoring, while maintaining the audio quality and reliability QSC has come to be known for.

The Core and I/O Frame are the fundamental elements of a Q-Sys system. The Core is the brain of the system; it performs all the audio routing and processing and handles all control functions. The I/O Frames are the local inputs and outputs of a system; each Frame can house four I/O cards enabling up to 16 channels of input and/or output in a single unit. Combining QSC DataPort amplifiers with the DataPort output card enables complete end-to-end monitoring and control. Adding QSC loudspeakers to the mix provides greater control, heightened acoustic performance, and increased reliability by enabling functions such as automatic deployment of advanced processing and speaker fault detection.

One of the primary development goals was to create a platform that had nearly unlimited resources; Q-Sys truly lives up to that goal with unrivaled processing breadth and depth. The design interface was created specifically to harness its unmatched power while remaining intuitive and easy to use. The processing tools are extensive and simple to apply. Once the system is designed, you will find that Q-Sys also offers a useful suite of trouble shooting and measurement tools.


Q-Sys provides extensive levels of system control which can be as simple or sophisticated as the application requires. Advanced control functions are easily created by simply connecting Control Functions in the Q-Sys Designer environment. Controls include an extensive selection of Functions and Scripts that may be used to define automated or user-initiated actions. These actions may be set to control internal Q-Sys parameters as well as external devices via (for example) GPIO. Snapshots of any or all controls can be created and recalled, or when a richer user interface is needed, custom control panels are easily created and published by the Core to any network device that supports browsers. Finally, IP-based external control protocol can be used in conjunction with 3rd party controllers for truly limitless control capabilities.

Q-Sys is a powerful and reliable unified system that features rock-solid performance backed by the unrivaled service and support QSC has built its reputation on. For more information please visit www.qscaudio.com/products/network/QSys.

Features

- Centralized processing architecture simplifies signal routing.
- Cores are available in three sizes based on channel capacity.
- Premium 24-bit AD and DA conversion used throughout.
- Abundant DSP capacity for the largest and most demanding installations.
- Intuitive and easy to use design GUI.
- Uses standard Gigabit Ethernet hardware for audio transport and control.
- System seamlessly integrates with QSC amplifiers and loudspeakers.
- Multiple levels of system redundancy are supported ranging from network-only to complete hardware redundancy including amplifiers.
- I/O Frames may be located with the Core or remotely – whichever best suits the needs of the installation.
- I/O Frames may be equipped with a variety of audio input and output cards.
- Q-Sys technical support is available 24/7 – worldwide.

 $24/_{7}$

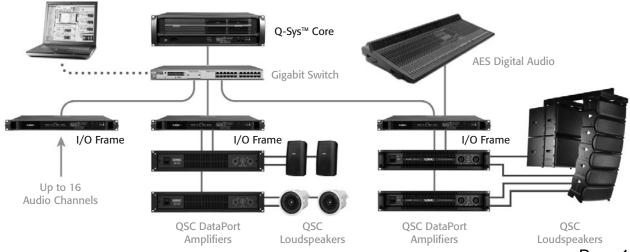



Core and I/O Frame Specifications

System Hardware	m Hardware Core 1000 Core 3000 Core 4000		I/O Frame		
Description	System processor and control engine		engine	System audio input and output device	
Front Panel Controls	LCD page forward momentary switch Unit ID button momentary switch Clear settings momentary switch		vitch	LCD page forward momentary switch Unit ID button momentary switch Clear settings momentary switch	
Front Panel Card Receptacle	SD (secure	digital) standard si	ize media	_	
Front Panel Indicators	Power On: Blue LED Device Status: Tri-color LED Audio Signal: Five tri-color LEDs 240 x 64 monochrome LCD graphics display			Power On: Blue LED Device Status: Tri-color LED Audio Signal: Five tri-color LEDs/per I/O card slot 240 x 64 monochrome LCD graphics display	
Rear Panel Connectors	RS-232: DE-9 (male 9-pin D shell connector) Video Out: HD-15 (female 15-pin D shell connector) Aux ports AUX A set: USB host x2, RJ45 10/100/1000 MBps Aux ports AUX B set: USB host x2, RJ45 10/100/1000 MBps GPIO A: DA-15 (female 15-pin D shell connector) GPIO B: DA-15 (female 15-pin D shell connector) Q-Sys Network LAN A: RJ45 1000 MBps only Q-Sys Network LAN B: RJ45 1000 MBps only		pin D shell connector) at x2, RJ45 10/100/1000 MBps at x2, RJ45 10/100/1000 MBps at D shell connector) a D shell connector) and D shell connector) and MBps only	RS-232: DE-9 (male 9-pin D shell connector) GPIO A: DA-15 (female 15-pin D shell connector) Q-Sys Network LAN A: RJ45 1000 MBps only Q-Sys Network LAN B: RJ45 1000 MBps only	
Capacity Network Audio Channels In Network Audio Channels Out Maximum Channels Out ²	64 64 1024	128 128 2048	128 – 512 ⁷ 128 – 512 ⁷ 2048	- - -	
End Node Capacity	128	256	512	-	
Processing (Channels of 32-bit audio)	128	256	512	-	
I/O Capacity	Up to 4 cha	nnels. Requires pu	urchase of I/O cards	Up to 16 channels ³ . Requires purchase of I/O cards.	
Line Voltage Requirements	100 VAC - 2	240 VAC, 50 – 60 I	Hz	100 VAC – 240 VAC, 50 – 60 Hz	
Current Draw	2.3A (120V	mains) 2.8A (120	OV mains) 2.8A (120V mains)	625mA (120V mains)	
Thermal	785 BTU/h	(typical) 950 BTL	J/h (typical) 950 BTU/h (typical)	205 BTU/h (typical)	
Dimensions (HWD)	5.25" x 19"	x 15" (133.35 mm	ı x 482.6 mm x 381 mm)	1.75" x 19" x 15" (44.45 mm x 482.6 mm x 381 mm)	
Accessories Included		/IEC line cord • Us dio I/O ship kit	ser manual • Software CD •	6 ft UL/CSA/IEC line cord • User manual • Optional audio I/O ship kit	

¹⁾ Up to 512 network audio channels when sending 8 or more channels per network audio stream.

Minimum System Requirements for Q-Sys™ Designer

Software

- Microsoft® Windows® Vista® SP1
- Microsoft® Windows® XP® Professional Version 2002 SP3
- Microsoft® .NET Framework 3.5 SP1

Hardware

Windows Vista Home Premium/Business/Ultimate

- 1 GHz 32-bit (x86) or 64-bit (x64) processor
- 1 GB of system memory
- \bullet 40 GB hard drive with at least 15 GB of available space
- Support for DirectX 9 graphics with:
- » WDDM Driver
- » 128 MB of graphics memory (minimum)
- » Pixel Shader 2.0 in hardware
- » 32 bits per pixel
- CD-ROM or DVD drive
- Keyboard and Microsoft® Mouse or compatible pointing device

Windows XP Professional

- PC with 300 megahertz or higher processor clock speed recommended; 233 MHz minimum required (single or dual processor system); Intel® Pentium®/Celeron® family, or AMD K6®/AMD Athlon®/AMD Duron® family, or compatible processor recommended.
- 128 megabytes (MB) of RAM or higher recommended (64 MB minimum supported; may limit performance and some features)
- 1.5 gigabytes (GB) of available hard disk space
- Super VGA (800 x 600) or higher-resolution video adapter and monitor
- CD-ROM or DVD drive
- Keyboard and Microsoft[®] Mouse or compatible pointing device

²⁾ Using maximum fan-out with 16-channel unidirectional I/O Frames.

³⁾ The CAES4 card (AES-3 input/output) doubles the audio channel count of any slot in which it is used.


I/O Card Specifications

I/O Cards	Mic/Line Input CIML4	High-Performance Mic/Line Input CIML4-HP	Line Output COL4	DataPort Output CODP4	AES-3 Input/Output CAES4
Description	Four channels of microphone/line-level analog audio input with 48V phantom power	Four channels of microphone / line-level analog audio input with 48V phantom power and high performance pre-amplifiers and A/D converters	Four channels of balanced, line-level analog output	Four audio output channels (2 DataPorts) for connection to DataPort equipped QSC amplifiers	Four input and four output channels of AES-3 digital audio
Performance					
Dynamic Range Unweighted	> 105 dB	> 112 dB	> 112 dB	> 114 dB	-
Dynamic Range A-weighted	> 108 dB	> 115 dB	> 115 dB	> 117 dB	_
Distortion 20 Hz – 20 kHz +4 dBu (nominal input) Distortion 20 Hz – 20 kHz 2 dB below clip (max)	< 0.009% THD+N < 0.08% THD+N	< 0.004% THD+N < 0.06% THD+N	- < 0.004% THD+N	- < 0.004% THD+N	-
Crosstalk 20 Hz – 20 kHz					
Inter-channel (max)	> 100 dB	> 110 dB	> 100 dB	> 95 dB	_
Inter-channel (typ)	> 110 dB	> 110 dB	> 110 dB	> 100 dB	_
Intra-channel (max)	> 100 dB	> 110 dB	> 100 dB	> 100 dB	_
Intra-channel (typ)	> 110 dB	> 110 dB	> 110 dB	> 110 dB	-
Frequency Response 20 Hz – 20 kHz (max)	± 0.5 dB	± 0.5 dB	± 0.5 dB	± 0.5 dB	_
Frequency Response 20 Hz – 20 kHz (typ)	± 0.2 dB	± 0.2 dB	± 0.2 dB	± 0.2 dB	± 0.2 dB
Input Impedance					
Balanced (nominal)	10 k ohms	10 k ohms	_	_	_
Unbalanced (nominal)	10 k ohms	10 k ohms	_	_	-
Common Mode Rejection 20 Hz – 20 kHz (max)	> 45 dB	> 45 dB	_	_	_
Common Mode Rejection 20 Hz – 20 kHz (typ)	> 50 dB	> 50 dB	_	_	_
Max Input Level	0.123, 2.25, 8.70, 17.35 Vrms	1.23 to 17.35 Vrms	_	_	_
iviax iriput Levei	-16, 10, 21, 27 dBu	-56 to 27 dBu	_	_	_
	-18.2, 7.04, 18.8, 24.78 dBv	-58.2 to 24.8 dBv	_	_	_
	(4 selections)	(continuously variable)			
Mute	Infinite attenuation (via digital mute)	Infinite attenuation (via digital mute)	Infinite attenuation (via electro-mechanical relays)	Infinite attenuation (via electro-mechanical relays)	Infinite attenuation (via digital mute)
Audio Converters					
Analog to Digital Conversion (ADCs)	24-bit delta-sigma at 48 or 96 kHz sample rate	24-bit delta-sigma at 48 or 96 kHz sample rate	-	-	-
Digital to Analog Conversion (DACs)	-	-	24-bit delta-sigma at 48 or 96 kHz sample rate	24-bit delta-sigma at 48 or 96 kHz sample rate	-
Group Delay	< 13 FS (≈ 271 µs) at 48 kHz	< 13 FS (≈ 271 µs) at 48 kHz	< 10 FS (\approx 196 μ s) at 48 kHz	< 13 FS (≈ 271 µs) at 48 kHz	< 37 FS (≈ 760 µs) at 48 kHz*
Connectors	Four 3-terminal Euro- style detachable ter- minal blocks	Four 3-terminal Euro-style detachable terminal blocks	Four 3-terminal Euro-style detachable terminal blocks	Two 15-pin HD15 connectors	Four 3-terminal Euro-style detachable terminal blocks
User-configurable Options (software enabled) Phantom Power	+48 V phantom power (meets IEC 1938 [1996] spec)	+48 V phantom power (meets IEC 1938 [1996] spec)	-	-	-
Output Trim					
Vrms (max)	_	-	8.7 V	_	-
dBu (max)	_	-	21 dBu	_	-
dBv (max)	_	_	18.8 dBv	_	_
Amplifier Standby	-	-	-	Set or clear amplifier in standby mode	-
Mute	_	_	-	Set or clear individual channel mutes	_
Enable Meters	-	-	-	Enable data collection of meters for each channel	-
Audio Output Levels	-	-	-	Adjust individual audio channel levels	-

^{*}Group Delay assumes that the sample rate converter is enabled.




Core 1000 | Core 3000 | Core 4000

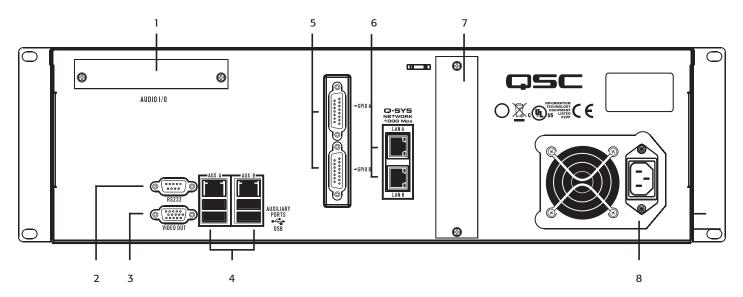

- 1. Audio I/O Bay accepts optional Q-Sys audio I/O card
- 2. RS-232 DE-9 male connector for serial communications
- Video Out HD-15 female connector accepts diagnostic VGA monitor
- 4. Auxiliary Ports
- AUX A Set USB host connector x2, RJ45 10/100/1000 Mbps Ethernet
- AUX B Set USB host connector x2, RJ45 10/100/1000 Mbps Ethernet

- 5. GPIO A and GPIO B female DA-15 connectors for Q-Sys control I/O
- 6. Q-Sys Network Port
- LAN A 1000 Mbps only, primary connection to Q-Sys gigabit network
- LAN B 1000 Mbps only, backup connection to Q-Sys gigabit network
- 7. Reserved for Future Use
- 3. AC Main Inlet IEC male connector

I/O Frame

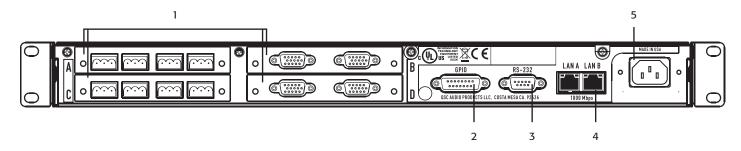

- 1. Configurable Audio I/O Bays
- 2. GPIO Interface (control I/O)
- 3. RS-232 Serial Control Interface

- 4. Dual Gigabit Network Interfaces for Q-Sys LANs
- 5. AC Main Inlet IEC male connector



©2009 QSC Audio Products, LLC. All rights reserved. QSC and the QSC logo are registered trademarks of QSC Audio Products, LLC in the U.S. Patent and Trademark office and other countries. Q-Sys is a trademark of QSC Audio Products, LLC. AMD is a trademark of Advanced Micro Devices, Inc. Apple is a trademark of Apple, Inc. Cisco is a trademark of Cisco Systems, Inc. Microsoft trademarks are owned by Microsoft Corp. in the US and other countries. MPEG Layer-3 audio coding technology licensed from Fraunhofer IIS and Thomson. Supply of this product does not convey a license nor imply any right to distribute MPEG Layer-3 compliant content created with this product. All other trademarks are the property of their respective owners. Patents pending.





C2G

DATA SHEET

Thunderbolt™ 4 USB-C® Cable (40Gbps)

Deliver 4K video, data content at 40Gbps, and power between Thunderbolt 4 devices

OVERVIEW

This Thunderbolt 4 USB-C Cable brings lightning-speed data transfers, 4K video support, and power delivery up to 100W. Get more done with less hassle by carrying one cable for the simplest, most reliable, and fastest connectivity for video, data, and power.

Deliver up to 40Gbps to or from a Thunderbolt 3 or Thunderbolt 4 enabled port. This cable is an ideal solution to transfer large amounts of information, whether uploading or downloading data. It is so fast you can transfer a 5GB file in about a second over the cable.

Stream video and audio with full DisplayPort 2.1 and 'Alt' mode functionality, displaying up to 8K video on a single display or 4K video on two displays for low-latency gaming, immersive creation, and simplified productivity with fantastic contrast and color depth to see photos, videos, and text with unbelievable detail.

Deliver up to 100W of charging power to or from the connected device, like your phone, laptop, or tablet, and other compatible USB devices to charge them quickly.

Connect to a high-speed 10 Gigabit Ethernet network or connect two computers over a peer-to-peer network, allowing for the transfer of large volumes of data from one PC to another, which is ideal when upgrading to a new system.

Connect with confidence, knowing that this Thunderbolt 4 cable has been certified and tested to ensure broad compatibility across Mac®, Windows®, and Chrome OS™ devices.

FEATURES

- Supports a top data transfer speed of 40Gbps when connected to Thunderbolt 3 or Thunderbolt 4 devices
- Supports a single 8K 60Hz display or two 4K 60Hz displays
- Supports all 'Alt' mode features outputting full DisplayPort, including multi-streaming
- Capable of charging up to 100 watts and syncing USB-C mobile devices
- Backward compatible with Thunderbolt 3, USB 3.2, 3.0, and 2.0
- Thunderbolt Networking allows 10Gb Ethernet connection or peer-to-peer networking between two computers
- Daisy-chain up to five Thunderbolt 4 devices or six Thunderbolt 3 devices for flexible configurations
- Tested for quality, meeting Intel's required certification standards

ITEM DESCRIPTION

C2G28885 1.5ft (0.5m) Thunderbolt™ 4 USB-C° Cable (40Gbps)
C2G28886 2.5ft (0.8m) Thunderbolt™ 4 USB-C° Cable (40Gbps)
C2G28887 6ft (2m) Thunderbolt™ 4 USB-C° Active Cable (40Gbps)

DATA SHEET

SIGNAL SPECIFICATIONS

- Resolutions up to 4K (4096 x 2160) at 60Hz
- Signal Bandwidth: 40Gbps Bidirectional

ELECTRICAL SPECIFICATIONS


- Voltage Rating: 30V
- Temp Rating: 80°C
- Max Conductor Resistance at 20°C (OHMS/KM): 30AWG: 387; 32AWG: 588
- Insulation Resistance at 20°C (min): DC-500V 100 KOHM/KM
- Dielectric Strength (min): AC-750V/1 Sec.

PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to 50°C; Ambient (Non-Condensing)
- Storage Temperature: 0°C to 70°C; Ambient (Non-Condensing)
- Operating Temperature (C2G28887 only): -20°C to 85°C;
 Ambient (Non-Condensing)
- Storage Temperature (C2G28887 only): 0°C to 40°C;
 Ambient (Non-Condensing)
- Minimum Bend Radius: 48mm

PHYSICAL CHARACTERISTICS

- Housing: LCP, Black
- Jacket: TPE
- Jacket OD: 4.8mm
- Shield Braid Coverage (Min): 80%
- Shield Braid Construction: 42AWG
- Connector: USB Type C Male; Contact: Special Copper; GND: Stainless Steel;
 Plug Shell: Stainless Steel; Plug EMI: Stainless Steel
- Shielding: Inner Shell Welding with Connector and Cable Braid
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2

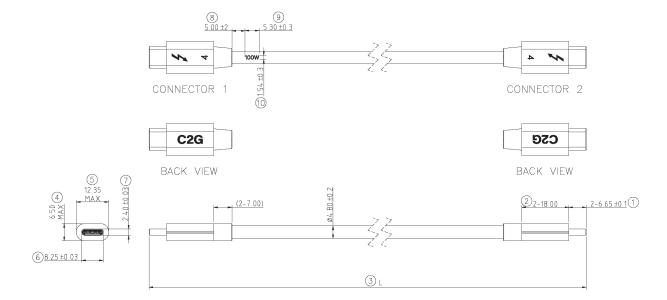



LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY

USA 800.506.9607 | c2g.com | legrandav.com | customer-service@c2g.com

EMEA +31 495 580 840 | c2g.com/uk | legrandav.com | c2g.emea@av.legrand.com

©2022 Legrand AV Inc. 220123 Rev A 3/22 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

DATA SHEET



6in USB-C® Female to USB-A Male SuperSpeed USB 5Gbps Adapter Converter

Adapt a USB-C device to a USB-A port on a laptop, desktop computer, or tablet

OVERVIEW

This USB-C Female to USB-A Male SuperSpeed USB 5Gbps Adapter Converter is the perfect solution for connecting a USB-C device to a laptop or desktop computer that does not have a USB-C port.

Simply connect the adapter converter into a USB-A port of a laptop or desktop computer and enjoy plug and play connectivity for USB-C devices. This adapter converter supports a data rate up to 5Gbps for data transfer and 900mA of power for device operation and charging. This adapter converter is compatible with earlier USB versions.

The USB-C connector has a symmetrical design which is identical on both sides, so no more worrying about whether it's upside-down or right-side-up. It will plug in the first time, every time—while preventing damage to the connector port from frequent plugging and unplugging.

FEATURES

- Small form factor for portability
- Plug and Play—no driver required
- Up to 5Gbps data transfer and 900mA of power
- Compatible with USB 3.0 specification and earlier versions
- Reversible, symmetrical USB-C connector

ITEM DESCRIPTION

6in USB-C Female to USB-A Male SuperSpeed USB 5Gbps Adapter Converter



DATA SHEET

SPECIFICATIONS:

6in USB-C Female to USB-A Male SuperSpeed USB 5Gbps Adapter Converter

ELECTRICAL SPECIFICATIONS:


- Support USB 3.0 upstream (connect USB-A host PC), USB-C downstream (connect USB-C devices for data and power transmission)
- USB-C female supports reversible plug
- No driver is required, plug and play
- Compatible with USB 3.0 specification and lower versions
- USB-C female supports max 5Gbps downstream data and 900mA downstream power for the connected USB-C device
- Support all versions of the operating system

PHYSICAL SPECIFICATIONS:

- Operating Temperature: 0°C to 45°C
- Storage Temperature: -10°C to 70°C
- Operating Humidity: 10% to 85% RH
- Storage Humidity: 5% to 90% RH

PHYSICAL CHARACTERISTICS:

- 5P PVC RoHS Black
- Low pressure mold material, transparent color, hardness: 40-48D-UL94V-0
- USB 3.1 C Type Connector with USB 3.0 AM Pinboard~PCB+Paster

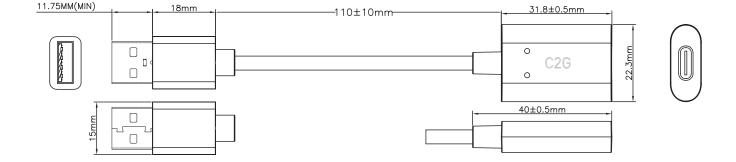



6500 Poe Ave. Dayton, OH 45414 Phone: 800.CABL.911 www.c2g.com





DATA SHEET

C2G Performance Series Ultra Flexible High Speed HDMI® Cable - 4K 60Hz In-Wall, CMG (FT4) Rated

Extend HDMI signals over a high performance HDMI cable and support HDMI audio and video features including 4K Ultra HD

OVERVIEW

The C2G Performance Series Ultra Flexible High Speed HDMI Cable is perfect for connecting a wide variety of devices from computers to projectors and monitors, AV presentation furniture, or in-wall applications requiring high speed HDMI features and video resolutions up to 4k (4096 x 2160) at 60Hz — perfect for conference rooms, classrooms, churches, and other commercial installations.

This Ultra Flexible High Speed HDMI Cable was designed for installations in tight spaces and offers commercial grade connectors that feature compact overmolding for high density environments, integrated finger grips on the top, bottom, and sides, for easy insertion and removal, and the gripping connector shell has 2x greater port retention to keep your devices connected. The gold plated connectors on the cable allow for better shielding, increased electrical conductivity, and durability.

This Ultra Flexible High Speed HDMI Cable supports the updated library of Consumer Electronic Control (CEC) commands, allowing communication between devices connected through the HDMI ports. Lastly, this fully-functional, high bandwidth cable has been tested to perform at industry standards and is backed by a lifetime warranty.

FEATURES

- Supports all HDMI 2.0 features including resolutions up to 4K (4096 x 2160) at 60hz, which means higher quality video for viewing your screen content
- In-wall (CMG/FT4) rated jacket, so you can safely run the cable inside of a wall and have a clutter free, clean look
- Integrated finger grips on the connectors for easy insertion and removal
- Gripping connector shell for 2x greater port retention
- Gold plated connectors for increased electrical conductivity and enhanced durability
- Directional cable with source connector labeled and tagged to easily differentiate from the labeled display connector
- Supports CEC extensions for control of consumer electronics devices through a single control point
- Backed by a Lifetime Warranty for peace of mind

ITEM DESCRIPTION

1ft (0.3m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
18in (0.5m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
2ft (0.6m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
2ft (0.9m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
3ft (0.9m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
6ft (1.8m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
10ft (3m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated


DATA SHEET

SIGNAL SPECIFICATIONS

- Supports HDMI Resolutions up to 4K 60Hz, 4:4:4, 18 Gbps
- Supports Full HD Blu-ray Disc and HD DVD Video
- Supports 3D Video
- Perceptual Quantizer (PQ HDR OETF (SMPTE ST 2084)
- Hybrid Log-Gamma (HLG) HDR OETF
- Static HDR Metadata (SMPTE ST 2086)
- DVD Audio, Super Audio CD (DSD)
- Dolby® True HD, DTS-HD Master Audio Bitstream Capable
- 4 Audio Streams
- Ethernet Channel: 100 Mbit/s
- Consumer Electronic Control (CEC), with Updated List of CEC Commands

ELECTRICAL SPECIFICATIONS

- Voltage Rating: 30V
- Temp: Connector: Temp Rating: 220°C
- Cable: Temp Rating: 75°C
 Conductor Resistance: 5Ω
 Insulation Resistance: 10MΩ
- Differential Data Input Voltage: 4.8V to 5.3V
- Differential Data Output Voltage: 4.7V to 5.3V




PHYSICAL SPECIFICATIONS

- Operating Temperature: -20°C to +75°C; 85% RH (Non-Condensing)
- Storage Temperature: -10°C to +55°C; 85% RH (Non-Condensing)
- Tensile Strength: 100N
- Minimum Bend Radius: 48
- Cable Jacket Ratings: CMG FT4
- Connector Gripping Force: HDMI Withdrawl Force: 3.12 to 3.28kgf (9.8N/1.0kgf Min; 39.2N/4.0kgf Max)
- Connector Gripping Force: HDMI Insertion Force: 2.54 to 2.61kgf (44.1N/4.5kgf Max)

PHYSICAL CHARACTERISTICS

- Material: Housing: PVC Molding
- SR-Mold: PVC, Color: Black
- Jacket Color: Black
- Connector Insulator: Blue; Front of the Housing: Blue; "C2G"
- Jacket OD: 6.00±0.20mm; Jacket Material: PVC; Jacket Thickness: 0.56mm (REF)
- Shield Drain: 7/0.10T (30AWG); Shield AL/Mylar: AL Face Inside; Shield Mylar; Transparent Mylar Tape
- Shield Filler: Filler; Shield Paper: Paper: Paper; Shield Consitution N/mm: 16/9/0.08; Shield Material: Tinned Copper; Shield Coverage %: 65%
- Connector: HDMI Type A Male Connector, Metal Shell Gold Plated, Electrical Contact Copper; Alloy Gold Plated 5u, Insulator Color: Blue
- Cable UL/CUL/CSA Rating: Type: (7/0.10T*1P+D+AL+MY)
 *5C+7/0.10T*3C+7/0.127T*1C+F+Paper+B16/9/0.08T OD:
 6.00mm;
- Cable UL/CUL/CSA Rating: Print: High Speed HDMI Cable With Ethernet E468040 (UL) CL2 75°C 30AWG
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2



C2G

A brand of 📮 legrand®

c2g.com | legrandav.com USA 800.CABL.911

trg@c2g.com

©2021 Legrand AV Inc. 200991 US 02/21 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

COMMERCIAL AV BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold



1801 9TH AVE.SOUTHEAST WATERTOWN SD 57201 605 886-2017

123242472 **Estimated Date Document Date** 04/01/25 05/29/24

Sales Quote

Quoted pricing good for 15 days from document date.

Sold To

CITY OF WATERTOWN 23 2ND ST NE WATERTOWN, SD 57201 Work: 605 882-6203

Ship To

CITY OF WATERTOWN **NEW CITY HALL** WATERTOWN, SD 57201

Customer Phone#	Sold To Cell#	Terms	Salesperson	Customer #	Store
Home: Work:605 882-6203		NET 30 DAYS	ERIC SCOTT	126203	12
Туре			Comments		
D - Delivery					

Ln#	Model / Brand	Description	Order	Price	Amount
1 D	70UQ7590P LGE	PTSM-70" UHD HDR SMART LED TV	6	\$699.99	\$4,199.94
2 D	55UR9000P LGE	PTSM-55" UHD ACTIVE HDR MM REM	4	\$499.99	\$1,999.96
3 D	PT300 KANTO	PTSM-32"-90" TILTING WALL MNT	4	\$129.99	\$519.96
4 D	PDX650 KANTO	PTSM-37"-75" MOTION WALL MOUNT	5	\$199.99	\$999.95
5 D	CM600G KANTO	SP/O-37"-70" LRG CEILING MOUNT	1	\$319.99	\$319.99
6 D	BIINSTALL SER 4 FLAT MOUNTED TVS	INSTALLATION	1	\$260.00	\$260.00



Duote Awards to munification of the l... 1801 9TH AVE.SOUTHEAST WATERTOWN SD 57201 605 886-2017

123242472
Document Date

Sales Quote

04/01/25 05/29/24

Quoted pricing good for 15 days from document date.

Sold To

CITY OF WATERTOWN 23 2ND ST NE WATERTOWN, SD 57201 Work: 605 882-6203 **Ship To**

CITY OF WATERTOWN NEW CITY HALL WATERTOWN, SD 57201

Customer Phone#	Sold To Cell#	Terms	Salesperson	Customer #	Store
Home: Work:605 882-6203		NET 30 DAYS	ERIC SCOTT	126203	12
Туре			Comments		
D - Delivery					

Ln#	Model / Brand		Description	Order	Price	Amount
	BIINSTALL SER 5 ARTICULATING MOUN	INSTALLATION		1	\$400.00	\$400.00
8 D	BIINSTALL SER 1 CEILING MOUNTED TV	INSTALLATION		1	\$150.00	\$150.00
				Management		

Merchandise: Delivery Charge: \$8,849.80 \$75.00

Total Sales Quote:

\$8,924.80

	Bill:	City of Watertown		Remit:	Municipal Utilities			
	_	Attn: Jennife	r	- -	901 4 Ave	: SW		
		PO Box 910		- -	Watertow	n, SD 57201		
	_	Watertown, S	SD 57201	=			5/2/2024	
	Claim #:			_				
	Da.	lootalling files	or to Now City Holl (Malla Force Buil	alia al				
	Re:	installing libe	er to New City Hall (Wells Fargo Buil	dirig)				
City #	Material:			Unit Price:		Extended:		
•	QTY							
						\$ -		
	725	48 Fiber Opt	ic Cable	\$1.08		\$ 783.00		
		Boring Per F		\$15.77		\$ 10,644.75		
			in Inner Duct	\$0.75		\$ 543.75		
	1	Fiber Splicing	g	\$1,738.00		\$ 1,738.00		
						\$ -		
						\$ -		
			Total Materials			\$ - \$ 13,709.50		
			State Sales Tax			ψ 13,709.30		
			City Sales Tax					
			Total Materials/Sales Tax				\$ 13,709.50	
	Labor:							
	0	hour -	Line Forman	\$63.79	per hour	\$ -		
	0	hour -	Journeyman Lineman		per hour			
	0	hour -	Electric Meter Foreman		per hour			
	0	hour -	Meter Person (Nightman)		per hour			
	0	hour -	Apprentice Meter Person		per hour			
	0	hour - hour -	Apprentice Lineman Locator		per hour			
	0	hour -	Part Time Helper		per hour per hour			
	0	hour -	Installing pole for temp or rental lig		per nour			
	U	nour -	mistalling pole for temp of Temaring	ψ100.00	pei poie	Ψ		
	OT Labor	r:						
	0	hour -	Line Foreman	\$85.78	per hour	\$ -		
	0	hour -	Journeyman Lineman	\$78.09	per hour	\$ -		
	0	hour -	Electric Meter Foreman		per hour			
	0	hour -	Meter Person (Nightman)		per hour			
	0	hour -	Apprentice Meter Person		per hour			
	0	hour - hour -	Apprentice Lineman	\$72.17	•			
	0	hour -	Locator Part Time Helper	\$0.00 \$0.00	•			
	U	nour -	Tart Time Helper	Ψ0.00	per nour	Ψ		
			Total Labor				\$ -	
	Equipme	nt:						
	0	hour -	Foreman Truck	\$35.00	per hour	\$ -		
	0	hour -	Digger Derrick	\$150.00	•	\$ -		
	0	hour -	Bucket Truck	\$140.00	•			
	0	hour -	Meter Department Van	\$35.00	•			
	0	hour - hour -	Trencher (ride on) Trencher/plow small	\$75.00 \$50.00	•			
	0	hour -	Trencher (three wheel)	\$40.00	•			
	0	hour -	Back Hoe	\$80.00	•			
	0	hour -	Small Dump Truck	\$50.00				
	0	hour -	Large Dump Truck	\$100.00	per hour			
	0	hour -	Fork Lift	\$45.00	•			
	0	hour -	Vacuum Unit	\$65.00	•	\$ -		
	0	hour -	Skid Steer	\$70.00	•			
	0	hour -	Light tower/Generator	\$20.00	per hour	\$ -		
			Total Favinment				Ф.	
			Total Equipment				\$ -	
	Sub Total	1					\$ 13,709.50	
	Excise Ta						\$ 279.81	
	Total						\$ 13,989.31	

Proposal





Date: 3/28/2024

Watertown City Hall

* Communications Cabling

Swiftel Contact Info:

Scott Mack

scott.mack@swiftel-bmu.com

605.697.8249 Office 605.868.7001 Mobile

605.697.8280 Fax

Scope of Work

- Provide, Install & Test Communications Cabling Infrastructure for Data, WAPs, Cameras & TV

- Materials Included:
- Cat 6, Plenum, Data
- Cat 6, Plenum, Camera
- Cat 6, Plenum, TV
- Cat 6A, Plenum, WAPs
- Cat 6 Data Jack
- Cat 6 Camera Jack
- Cat 6 TV Jack
- Cat 6A WAP Jack
- Faceplate, 2-port
- Floorplate, 106-2
- Surface Box, 1-port for WAPs
- 48-Port Panel (Data)
- 24-Port Panel (WAPs, Cameras & TV)
- Equipment Rack, 2-Post
- Vertical Management, 6"
- Vertical Management, 10"
- HDMI Cabling

Exclusions:

- Cable Tray (Provided by EC)
- Backboard, 3/4" AC Plywood, Painted (Provided by EC)

\$ 47,660.00

Customer Signature:	Date:
Purchase Order #	

Agendericentistics and the imposed and the interest of the int

Cart

Agenda Item 9.(e) Approval of Quote Awards to multiple vendors for the I...



Connecting Point
504 Jenson Ave SE
Address2,
Watertown, SD, 57201 U.S.A.
1-800-529-5500

onlinesales@connectingpoint.biz

CART #: 2493 **Date:** 05/29/2024

Billing Address

Peter Boyle 23 2nd St NE Watertown, SD, 57201 U.S.A. 605-881-5234 pboyle@watertownsd.us

Shipping Address

Peter Boyle 23 2nd St NE Watertown, SD, 57201 U.S.A. 605-881-5234 pboyle@watertownsd.us Free Delivery

Customer Details

Watertown IT Dept.
Peter Boyle
605-881-5234
pboyle@watertownsd.us

Sales Associate

Bryan Waege 605-882-1555

varstreet@connectingpoint.biz

Item#	Mfr.Part	Description	Price	Qty	Amount
1	SMT2200RM2UC	APC by Schneider Electric Smart-UPS 2200VA LCD RM 2U 120V with SmartConnect - 2U Rack-mountable - 3 Hour Recharge - 6.60 Minute Stand-by - 120 V Input - 120 V AC Output - Sine Wave - 6 x NEMA 5-15R, 2 x NEMA 5-20R - 8 x Battery/Surge Outlet - TAA Compliance	\$1,527.35	2	\$3,054.70
2	SRCABLERINGV RT	Tripp Lite Rack Enclosure Cabinet 6ft Horizontal Cable Ring Flexible 6" - Cable Panel - Black - RoHS, TAA Compliance	\$127.75	2	\$255.50
3	SR4POST1224	Tripp Lite by Eaton 45U SmartRack 4-Post Open Frame Rack - Threaded 12-24 Mounting Holes - 45U Rack Height x 19" Rack Width - Black - Cold-rolled Steel (CRS) - 1000 lb Static/Stationary Weight Capacity - RoHS, TAA Compliance	\$489.16	2	\$978.32
4	Tripp Lite SmartRack 10-ft. x 1-ft. (3 m x 0.3 m) Cable Ladder 2 sections SRCABLETRAY/SRLADDERATTACH needed - Cable Ladder - TAA Compliance SRCABLELADDE R		\$242.62	2	\$485.24
5	SRLADDERATTA	Tripp Lite Rack Roof Kit Connect SRCABLELADDER to Open Frame Racks and Wall - 1 - TAA Compliance	\$38.25	2	\$76.50
	CH			D-	ge 200 of 20

No. of item(s): 5	Sub Total:	\$4,850.26
Agenda Item 9.(e) Approval of Quote Awards to multiple vendors for the I	Freight:	\$0.00
	Order Total:	\$4,850.26
Payment Details	Shipping and Delivery De	tails
Payment Method: Company PO	Shipping Method: Free Deliver	ry
Terms and Conditions		

Solution Proposal







57858 .01

504 Jenson Ave SE Watertown, SD 57201 Sioux Falls, SD 57105 P: 605.381.8881 S710 S Kiwanis Ave. P: 701.258.6689 S114 Main St. N Ste. 202F S01 S 42nd Street, Suite G1 Hutchinson, MN 55350 Grand Forks 58201 P: 320.582.0234

City of Watertown IT Dept. - Meraki MS130 & MR46 2025 Budget

May 28, 2024

Bill To: City of Watertown IT Dept. Peter Boyle 23 2nd St. NE

Watertown, SD 57201

Phone: (605) 753-3558 Ship To: City of Watertown IT Dept. Peter Boyle 23 2nd St. NE Watertown, SD 57201

Email: pboyle@watertownsd.us

Salesperson: Greg Richter

	Description	Price Each	Qty	Ext Price
Items				\$22,842.00
L	CISCO MERAKI MS130-24P-HW ETHERNET SWITCH Cisco Meraki MS130-24P-HW Ethernet Switch - 24 Ports - Manageable - Gigabit Ethernet - 10/100/1000Base-T, 1000Base-X - 2 Layer Supported - 4 SFP Slots - 370 W PoE Budget - Optical Fiber, Twisted Pair - PoE Ports - Rack-mountab	\$2,269.00	2	\$4,538.00 \
2	CISCO MERAKI ENTSUPP SUBLIC 5Y Cisco Meraki Enterprise + Support - Subscription License - 1 License - 5 Year	\$539.00	2	\$1,078.00
3	MERAKI MR46 WIRELESS AP Meraki MR46 802.11ax 3.50 Gbit/s Wireless Access Point - 2.40 GHz, 5 GHz - MIMO Technology - 1 x Network (RJ-45) - 2.5 Gigabit Ethernet - Desktop, Ceiling Mountable, Wall Mountable, Rail-mountable	\$1,309.00	9	\$11,781.00 X
ı	MERAKI 5 YEAR SUPP ENTERPRISE Meraki MR Enterprise Cloud Controller License, 5 Years - Meraki MR Series Access Point - Subscription License - 5 Year License Validation Period LICS AND SUP	\$605.00	9	\$5,445.00

Payment terms are established at the time of the order. We accept cash or check along with credit card, but our company policy is to limit credit card payment acceptance to \$4,000.00 or less per account per month. We also offer leasing and other options to manage your purchase. Account setup time can take 1-2 business days to review and approve.

Subtotal	\$22,842.00
Tax	\$0.00

Unopened items can be returned 15 days from date of delivery without restock fees. Items that have been opened will have a 15% restock fee and can be returned up to 30 days from date of purchase. There are no returns for SPECIAL ORDER, CUSTOM CONFIGURATIONS or Items that are older than 30 days from date of purchase.

Total	\$22,842.00

Connecting Point is not responsible for any damages that occur during shipping. As the recipient, you are responsible for reporting damaged shipments and to inspect all boxes prior to signing for deliveries. You also have an option of refusing the shipment of any damaged goods. If not refused, take pictures of any damage and have the delivery driver sign off on shipping documentation. Any damage done from shipping must be brought to our attention immediately at time of receiving the product. Delayed reporting of any damages or missing parts may result in rejection of your claim. Hold all damaged goods and all original packing materials for inspection. Shipping insurance is available at and additional cost.

Queted by			
Quoted by:			
Accepted by:			

By initialing here you are agreeing to accept these shipping terms.

ESEind, INC.

920 7th Ave Brookings, SD 57006 US +1 6056913265 matt@eseind.com



DATE 07/13/2021

Proposal

ADDRESS

City of Watertown PO Box 910 Watertown, SD 57021-0910

PROPOSAL # 1356

AMOUNT ACTIVITY QTY **RATE** Sales City Hall Renovation (Video Surveillance): Sales 1 12,900.00 12,900.00 Video Surveillance per the specifications listed on the project drawing ET101 dated 5/27/2021. Six (6) - Interior 5 mp IP camera Five (5) - Exterior 5 mp IP camera with mounting arms Two (2) 360 degree cameras (multi sensor) with mounting arms Thirteen (13) - Spectrum Recoding Licenses Network switches by others **TOTAL** \$12,900.00

Accepted By Accepted Date

ESEind, INC.

920 7th Ave Brookings, SD 57006 US +1 6056913265 matt@eseind.com



Proposal

ADDRESS

City of Watertown PO Box 910 Watertown, SD 57021-0910 PROPOSAL # 1355 DATE 07/13/2021

ACTIVITY	QTY	RATE	AMOUNT
Sales			
City Hall Renovation (Door Access):			
Sales	1	27,150.00	27,150.00
Door access per the specifications listed on the project drawing ET101 dated 5/27/2021.			
Sales			2,495.00
Add integrated alarm system - monitor three exterior doors, tunnel door and two garage			
doors. Four 360 motion sensors. Intergraded so when entering the building via the door			
access the system there will be no need to enter a pin on a keypad.			
TOTAL			\$29.645.00

Accepted By Accepted Date

Cart

Agenda Item 9.(e) Approval of Quote Awards to multiple vendors for the I...



504 Jenson Ave SE Address2,

Watertown, SD, 57201 U.S.A.

1-800-529-5500

onlinesales@connectingpoint.biz

CART #: 2492 **Date:** 05/28/2024

Billing Address

Peter Boyle 23 2nd St NE Watertown, SD, 57201 U.S.A. 605-881-5234 pboyle@watertownsd.us

Shipping Address

Peter Boyle 23 2nd St NE Watertown, SD, 57201 U.S.A. 605-881-5234 pboyle@watertownsd.us Free Delivery

Customer Details

Watertown IT Dept.
Peter Boyle
605-881-5234
pboyle@watertownsd.us

Sales Associate

Bryan Waege 605-882-1555

varstreet@connectingpoint.biz

varstreet@connectingpoint.biz				point.biz	
Item#	Mfr.Part	Description	Price	Qty	Amount
1	991-000478	Logitech Rally Bar Huddle + TAP IP Video Conference Equipment - For Huddle Space - 1280 x 800 Video (Live) - WXGA - 1 x Network (RJ-45) - 1 x HDMI In - 1 x HDMI Out - USB - Gigabit Ethernet - Wireless LAN - Internal Speaker(s) - Internal Microphone(s) - TAA Compliance	\$2,395.56	3	\$7,186.68
No. of item(s): 1		Sub Total:		\$7,186.68	
		Freight:		\$0.00	
			Order Total:		\$7,186.68
Payment Details		Shipping and Delivery Details			
Payment Method: Company PO		Shipping Method: Free Delivery			
Terms	and Conditions		1		

Date: March 22, 2024

Project Name: Renovation and Addition for New City Hall

Project Address: Watertown, SD
Project Budget: Post Bid Estimate

DESCRIPTION	WF REN	O COMPLETE OVATION FOR CITY HALL	REMARKS
CONSTRUCTION			
Base Bid (site work, renovation & addition)	\$	3,944,370	Huff Construction
Alternate 1 - Enclose drive through structure Alternate 2 - Remove existing vault door	\$	266,600 3,500	Huff Construction Huff Construction
Asbestos Abatement Owner Construction Contingency (2.5%)	\$	31,850 55,361.75	Prairie Environmental Plus \$50,000 Allowance in Bid
Total Proposed Construction Budget	\$	4,301,682	
REMAINING COSTS BY CITY (ESTIMATED)			
A/V and Technology	\$	400,000	Networking (cable, conduit, network racks, fiber, battery backups), Security/Door access, AV for Council and Basement Conference room, TVs/Digital Signage for conference rooms/offices
Furniture/Furnishings/Equipment	\$	640,000	30 FTE, 3 meeting rooms, training room, council chambers: desks, chairs, tables, printers, file cabinets, cubicle walls, high density storage, safe
Interior Signage	\$	20,000	Estimated
Construction Testing and Inspection	\$	8,000	Budget-Geotek
Subtotal:	\$	1,068,000	
Totals	\$	5,369,682	