

PRESENTATION OF FINDINGS FLAMINGO DITCH FEASIBILITY STUDY CITY OF VENICE

JUNE 30, 2025

Thomas Pierro, PE, BC.CE – Senior Project Manager & Principal Engineer

Capt. Joseph Morrow, PE – Senior Coastal Engineer

WORKSHOP AGENDA

- Study Progress Review
- Grant Application
- Additional Data Collection
- Model Development
- Model Validation
- Simulated Weather Events
- Alternatives Analysis
- Model Results
- Overall Study Findings
- Next Steps



FLAMINGO DITCH FEASIBILITY STUDY

Roadways and private property near the Flamingo Ditch outfall experience flooding due to storm surge, rainfall events, and/or a combination of both.

- **Existing Information:**


- Open drainage ditch surrounded by low lying areas
- Private ownership with limited drainage easement
- Repetitive flooding of private properties and nearby roads
- Subject to storm surge, rainfall, and/or compound events

- **Study Objectives:**

- Obtain public input for historical context and local observations
- Review previous studies and existing data for model refinements
- Conceptualize and compare options to reduce flooding potential



HISTORIC AERIAL IMAGE OF FLAMINGO DITCH (C. 1948)

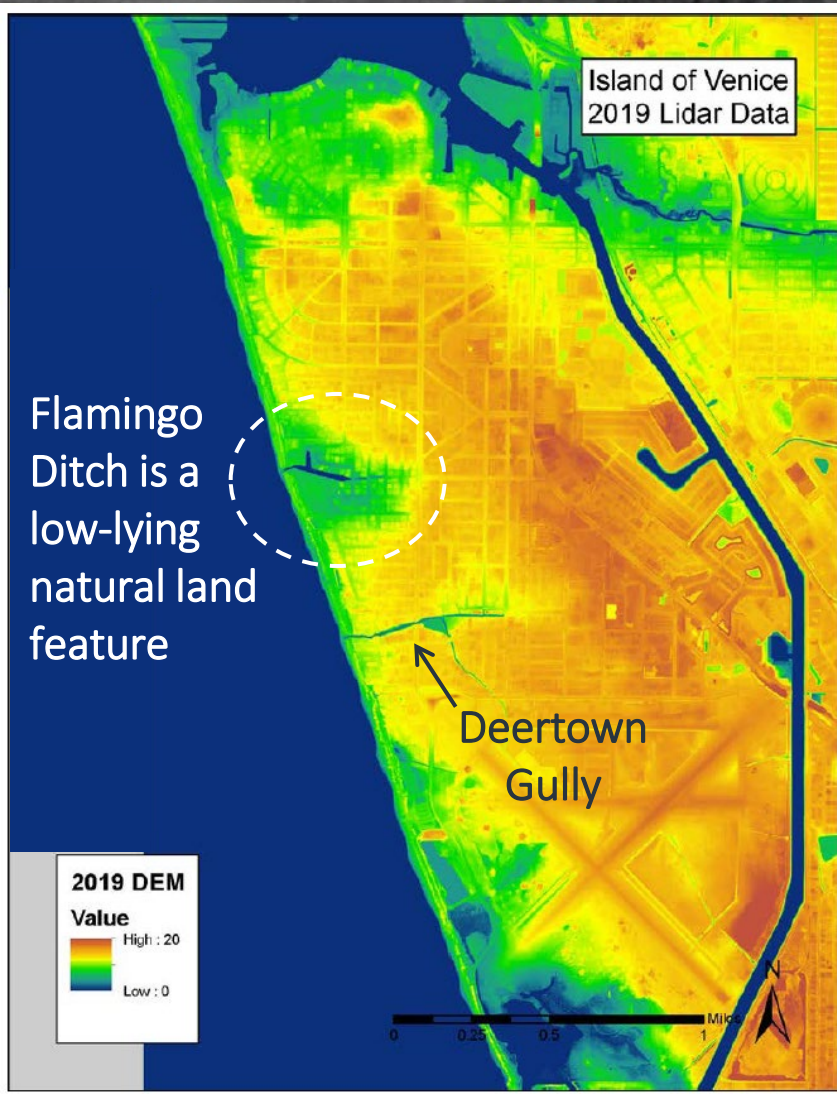

PRELIMINARY FINDINGS



- **Flooding issues exist on a re-occurring basis supported by public comment, literature review, and preliminary model evaluations.**
 - Minor rain events can result in neighborhood flooding.
 - Hurricanes have caused extensive impacts to homes.
- **Challenge is two-fold:**
 - Stormwater drainage
 - Storm surge inundation
- **Potential concepts to improve the system:**
 - Elevate, Block, Pump, Discharge, Maintain

MARCH 11, 2025 MEETING

- ✓ Public comment period
- ✓ Background information
- ✓ Initial model set-up and review
- ✓ Grant application
- ✓ Additional data collection
- ✓ Finalize model set-up
- ✓ Build alternatives in model
- ✓ Simulate a range of rain/surge events
- ✓ Add/refine alternatives
- ✓ Results and reporting



GRANT APPLICATION



National Oceanic and Atmospheric
Administration
U.S. Department of Commerce

- NOAA's Transformational Habitat Restoration and Coastal Resilience Grants Under the Bipartisan Infrastructure Law (Round 3)
- Grant application submitted in April 2025:
 - Requested \$5.9M in funding for outfall system improvements at Flamingo Ditch
 - Scope includes: Design, Permitting, Plans and Specifications, Construction, Bidding/Administration/Supervision
- Notifications of award anticipated in summer or fall of 2026, after the selection process is complete
- If approved, funding timeline estimated to be 2026-2029


ADDITIONAL DATA COLLECTION

- 2025 updated survey of ditch and pipes
- Recent survey shows average bottom elevation in ditch is around -5' NAVD88
- Water level measured at time of survey (April/May 2025) matched historic measurements of around +1.4' NAVD88
- Flamingo Ditch to the +5.5' contour (yellow line) covers roughly 3.6 acres
- Storage capacity above static water level (+1.4') is limited to the +5.5' contour before flooding
- **276,000 cubic feet of storage** (not including the streets and ditches east of Gardenia)



ICPR MODEL DEVELOPMENT


- Interconnected Channel and Pond Routing (ICPR) Program
- Previously developed model
- Correction of routes/features
- Sub-basin refinement
- Data collected: April 2025
 - Stormwater Invert Survey
 - Topographic Survey
- Improvement of model details

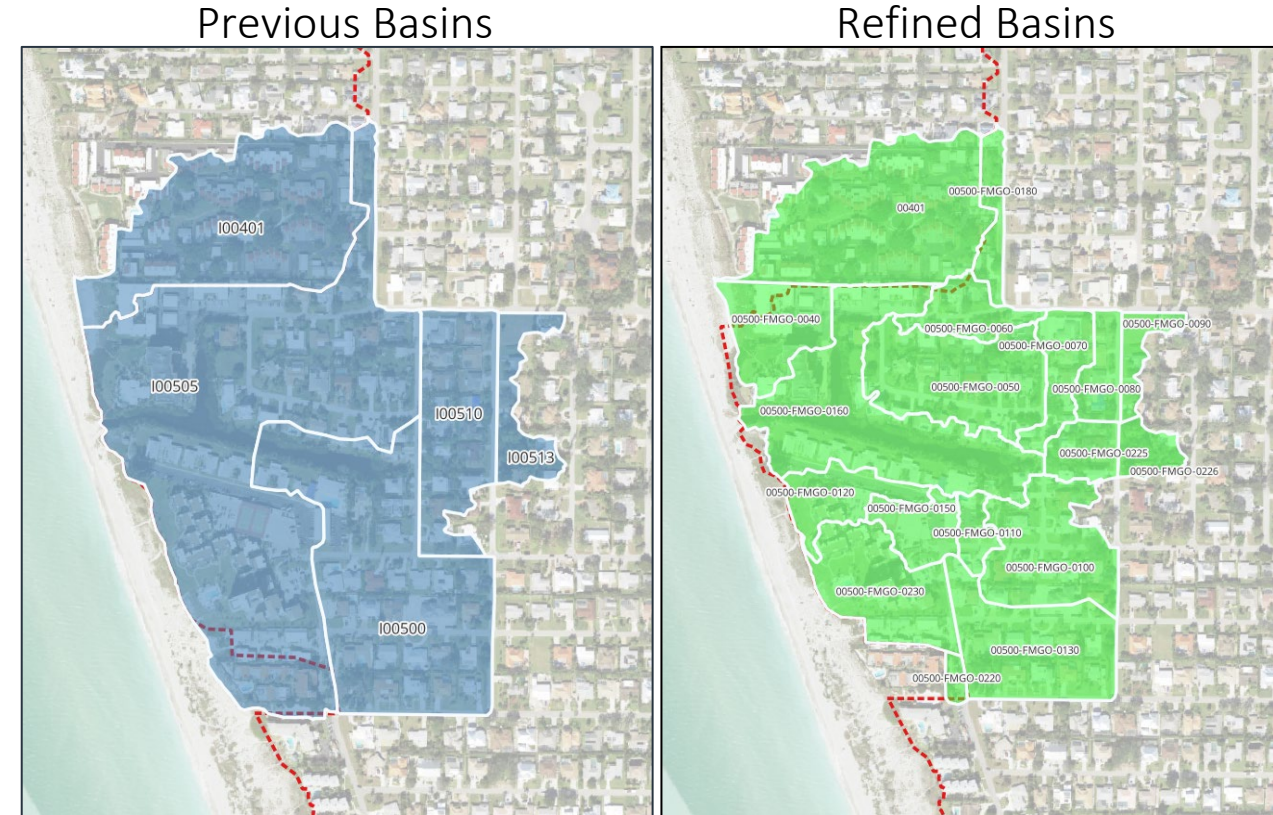


After

MODEL VALIDATION

- Updated ICPR model with new data and refinements
- Validate model setup with comparison to actual storm events:
- Hurricane Helene
 - 9/26/2024 landfall
 - Between a 50- and 100-year surge event
 - Low frequency, high level surge
 - 1-year/24-hour event (2.45" rain)
 - Very high frequency, low level rainfall

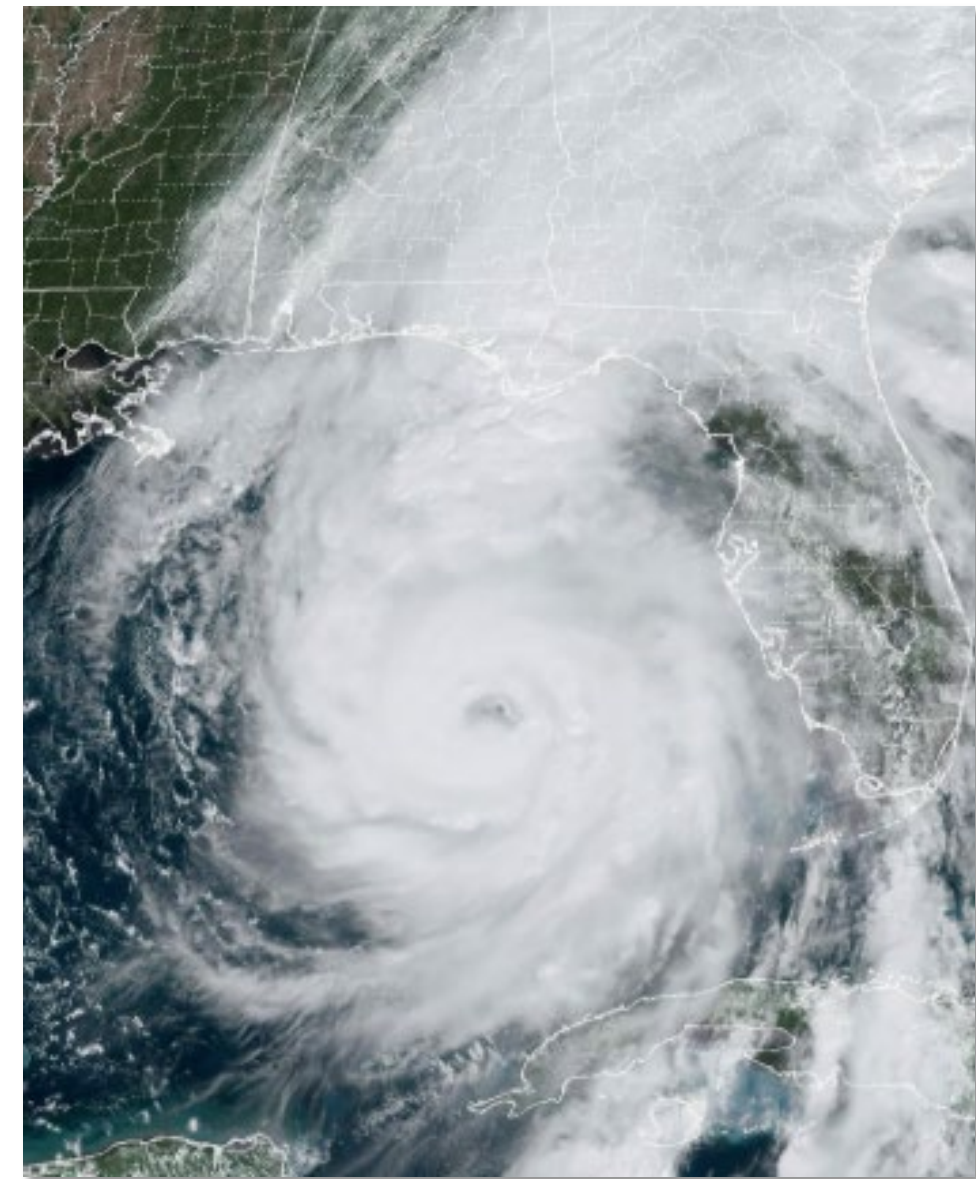

EXISTING CONDITIONS + H. HELENE SIMULATION

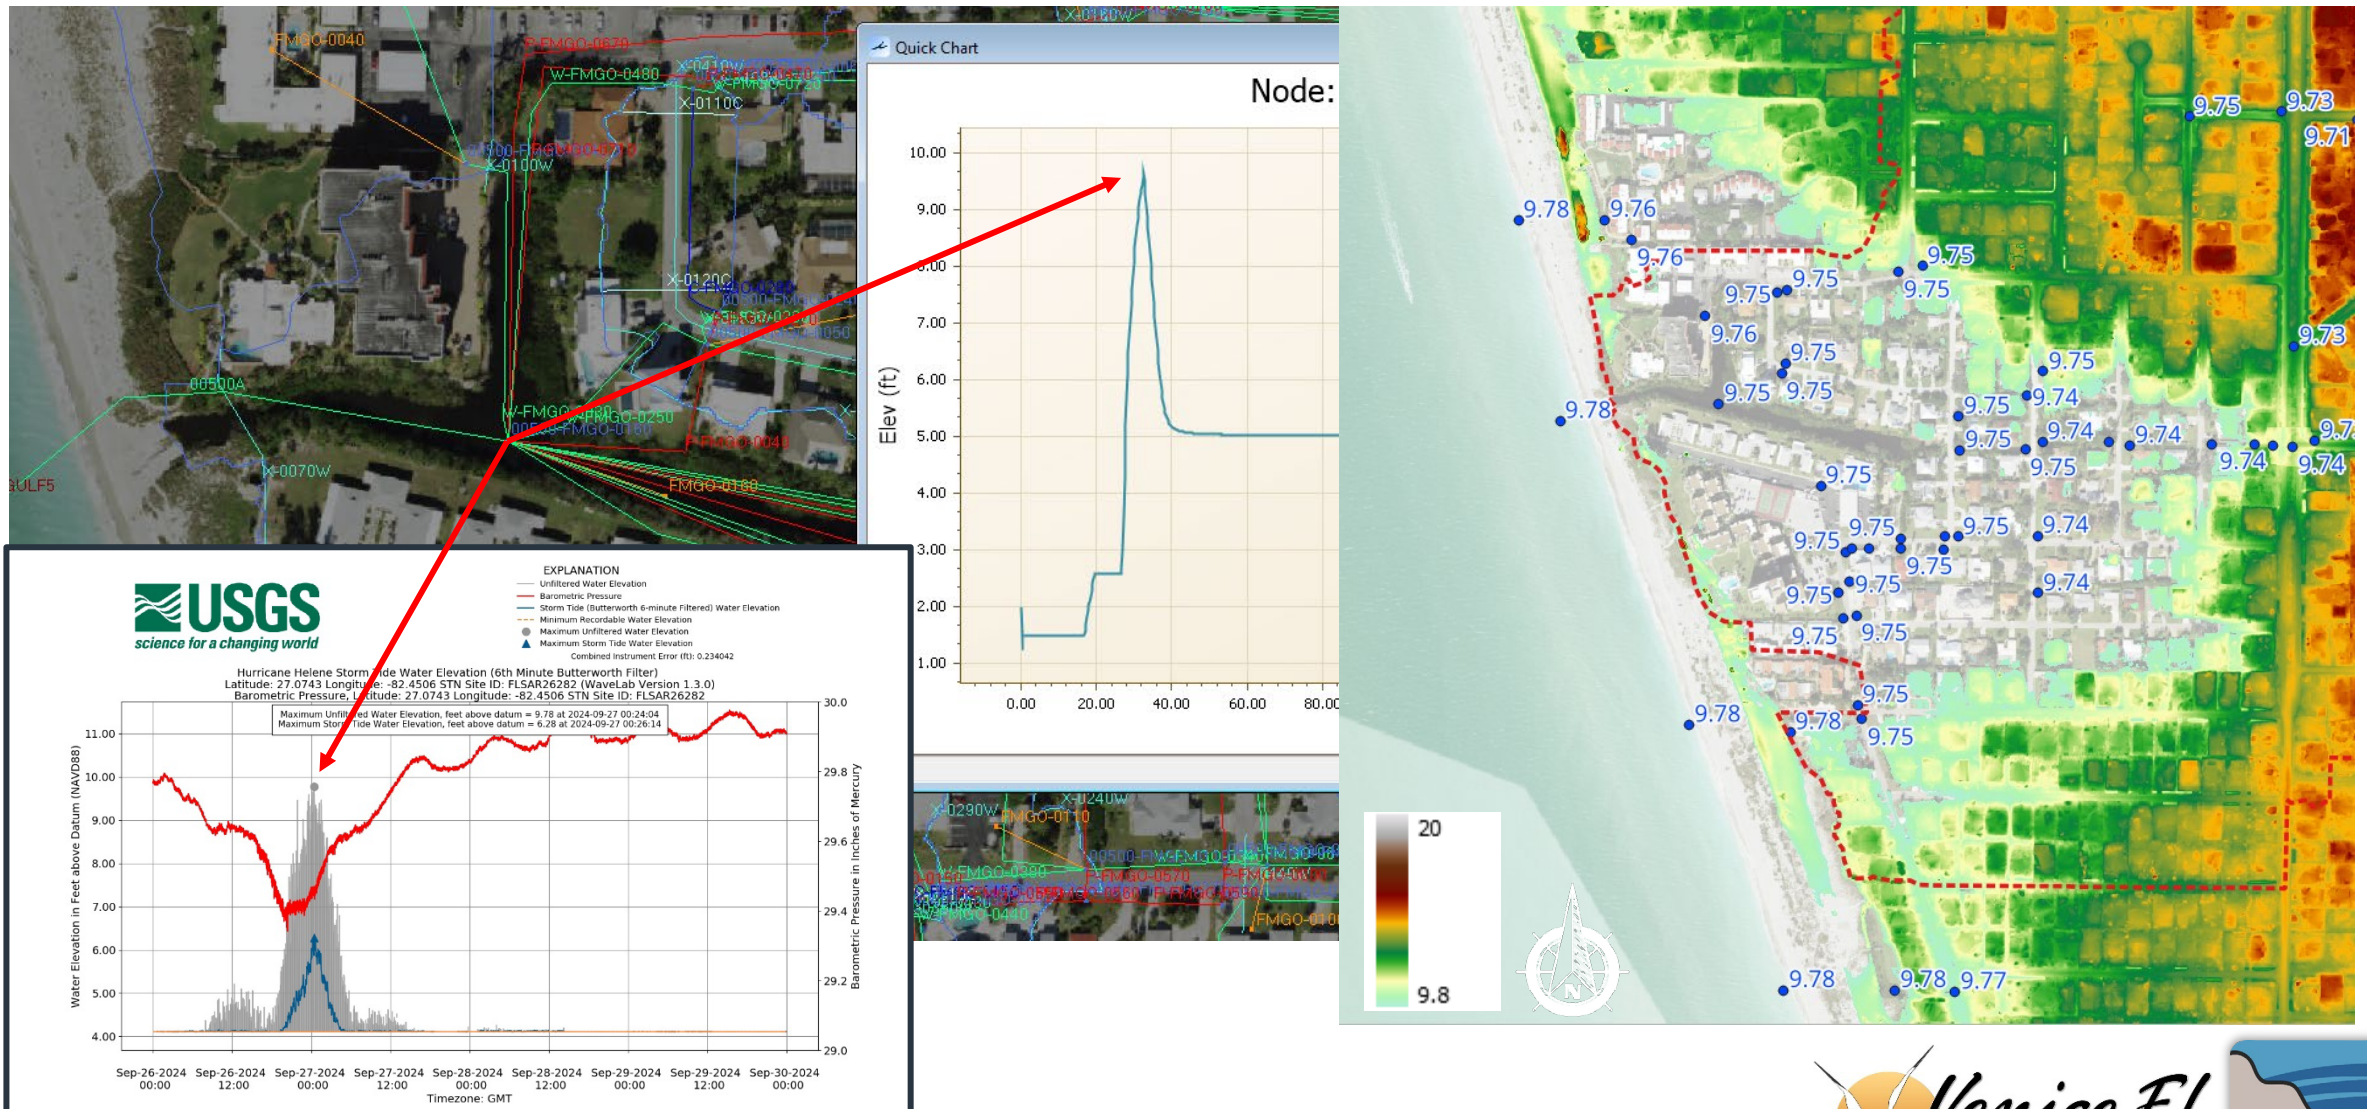


MODEL SIMULATION



- H. Helene flooding



Photo courtesy of City of Venice, photo date of 10/1/2024, view to northwest

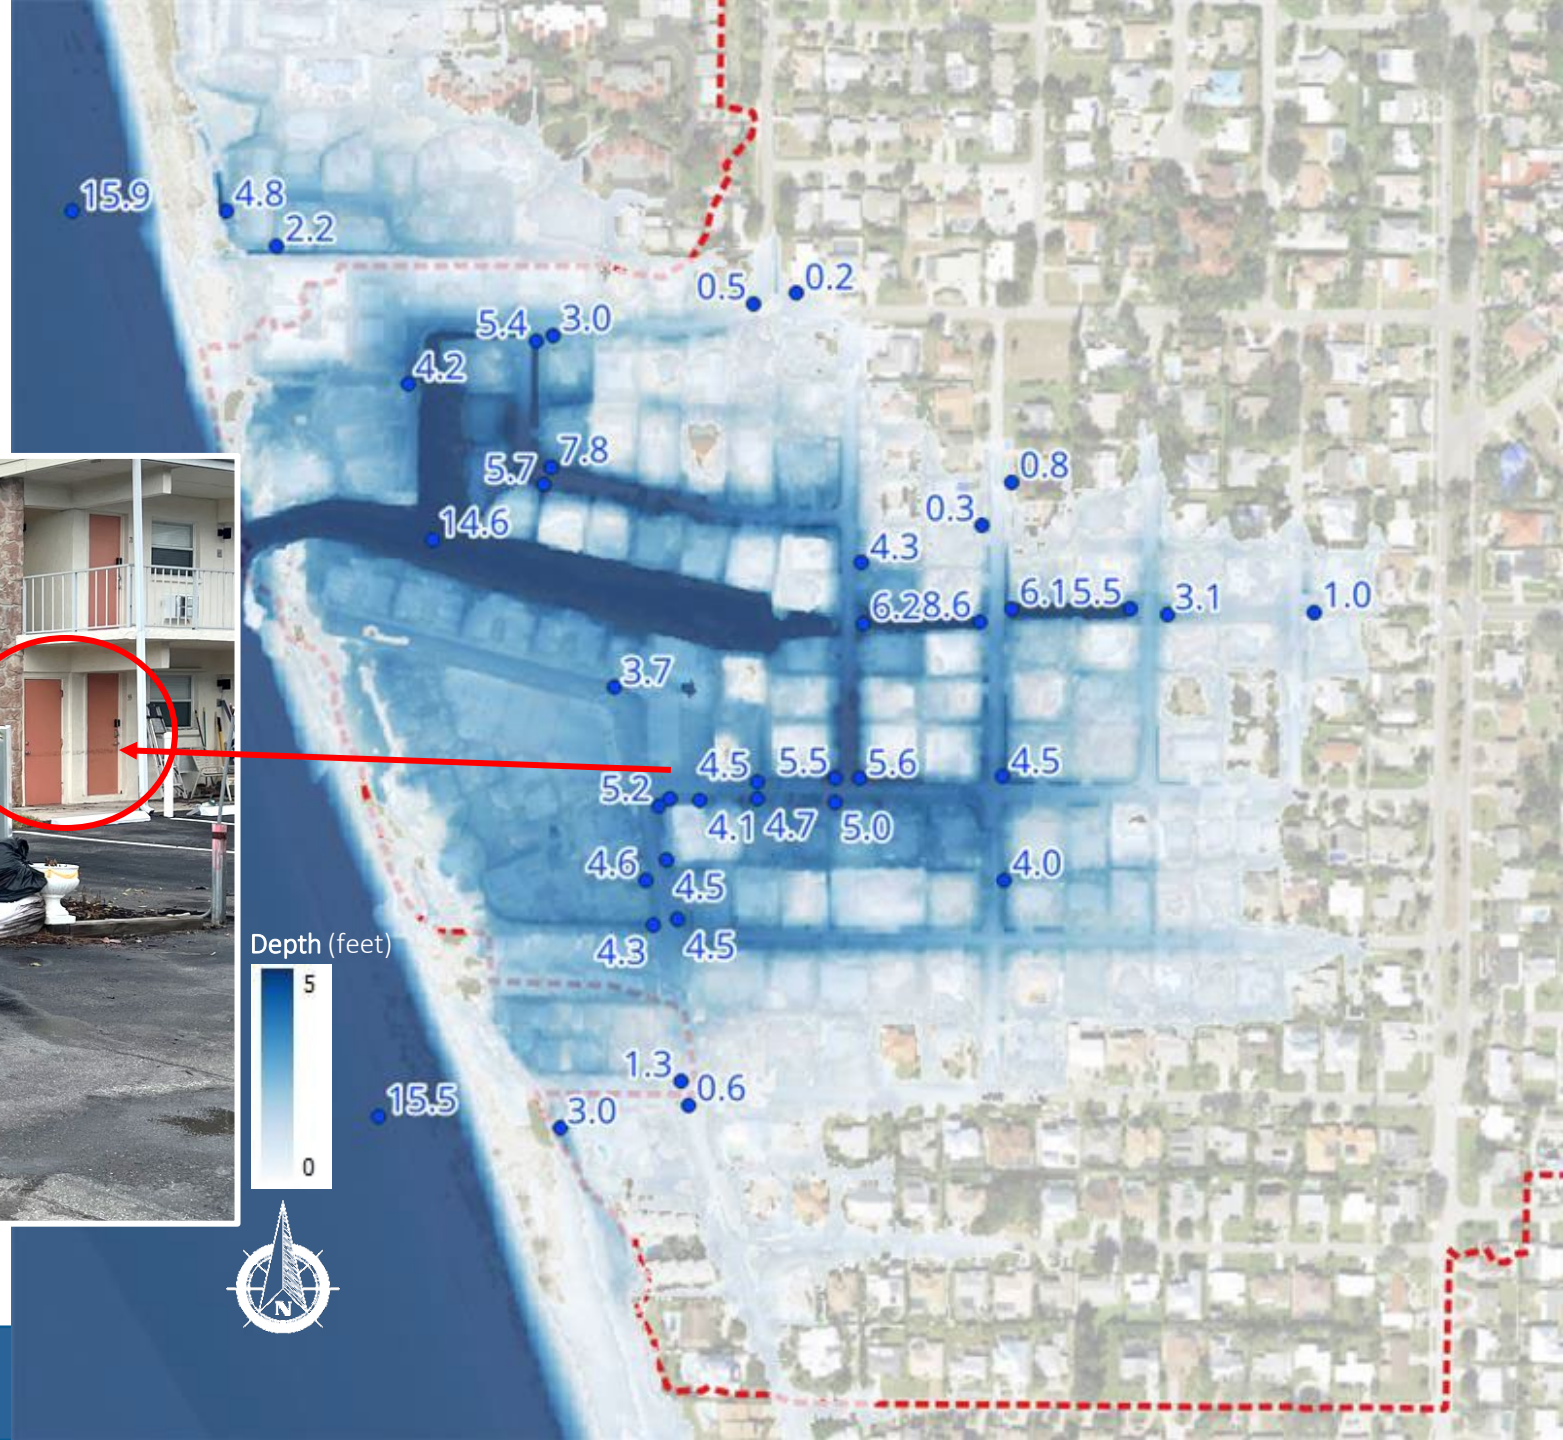

H. HELENE SIMULATION: OUTFALL OPEN VS. CLOSED

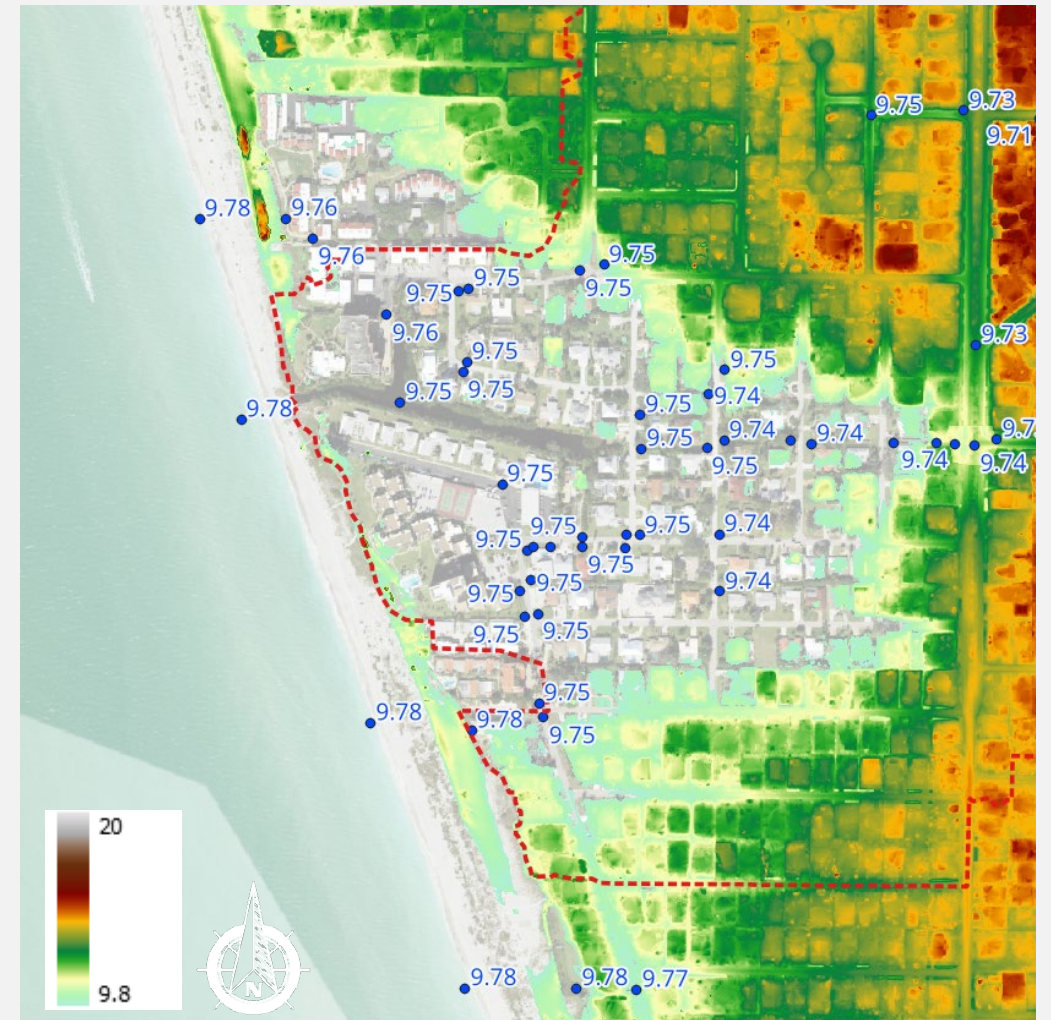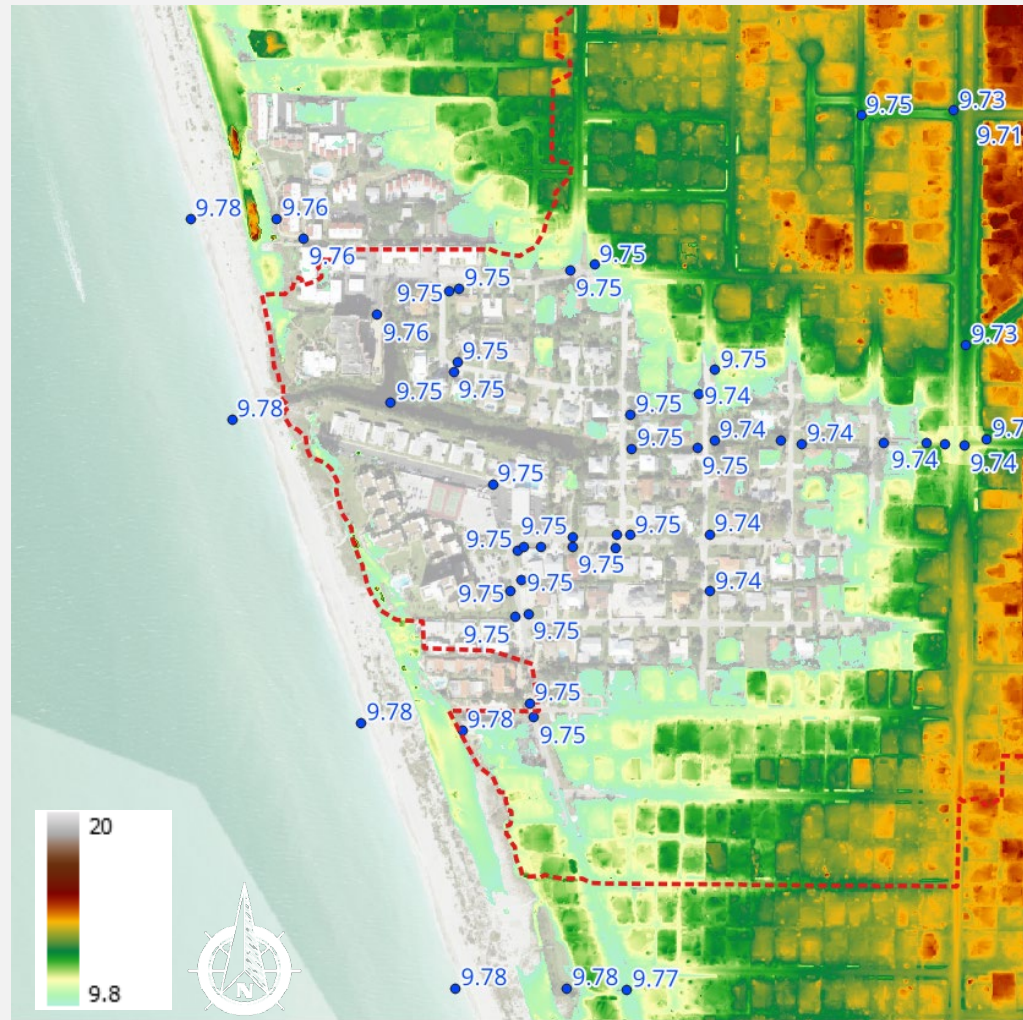

SELECTED RAIN AND SURGE EVENTS FOR MODEL


- Rainfall Events
 - 1" – 1 Hour (High frequency event)
 - 2" – 1 Hour (High frequency event)
 - 25-Year (8.2" – 24 Hours) (City of Venice design criteria)
 - 100-Year (10" – 24 Hours) (Extreme event)
- Coastal Surge Events
 - 25-Year (7.2')
 - 50-Year (9.1')
 - 100-Year (11.7')
- Rain + Surge = Compound Events
 - 10-Year Rain (6.59") + 50-Year Coastal Surge

ALTERNATIVES ANALYSIS


- Initial Alternatives - One scenario for each category:
 - Drain – pipe/pump
 - Elevate – raise banks/landforms
 - Storage – retain (some) water to gain time
 - Upstream Improvements – reconfigure/re-route
 - Block – keep the surge out
- Presentation of model results
 - Each alternative compared to existing conditions for rainfall and surge
- Combined Alternatives
 - Developed based on results of initial model runs

ALTERNATIVES ANALYSIS

- Alternative 1
 - Drain: Pipe and pump system for systemized drainage to the Gulf
 - 1 pump @ 35 CFS
 - 2 pumps @ 70 CFS
 - Massive pump @500 CFS
 - Elevate: none
 - Storage: none
 - Upstream Improvements: none
 - Block: none
- Results:
 - Reduces some flooding in rainfall events, no effect on surge
 - Include for further analysis

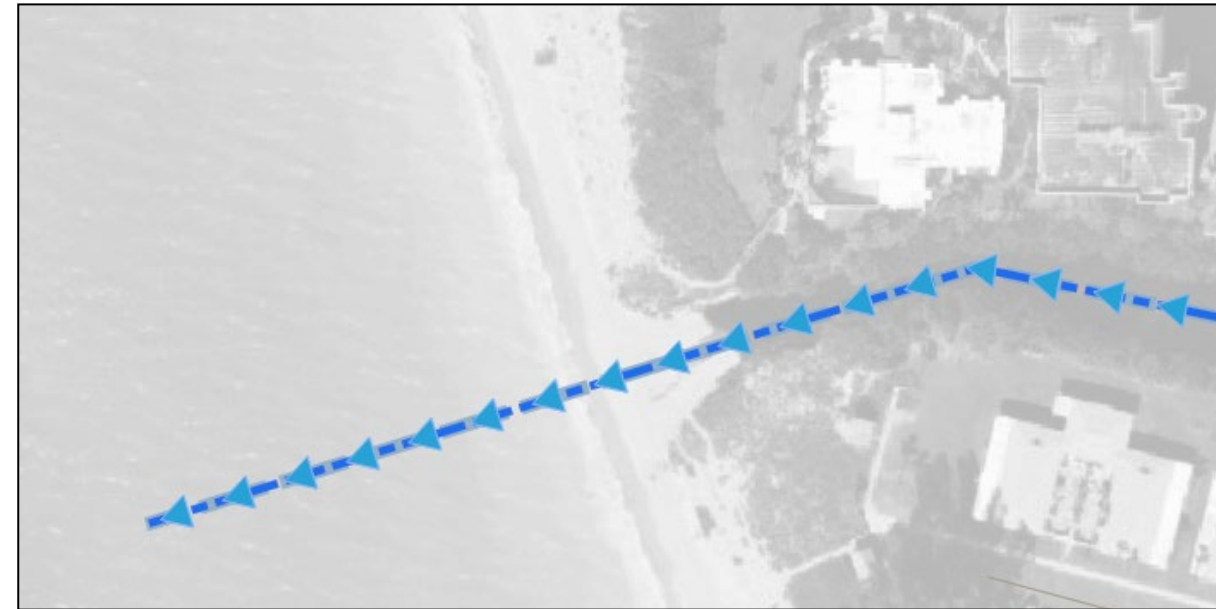

Example: 2012 Concept

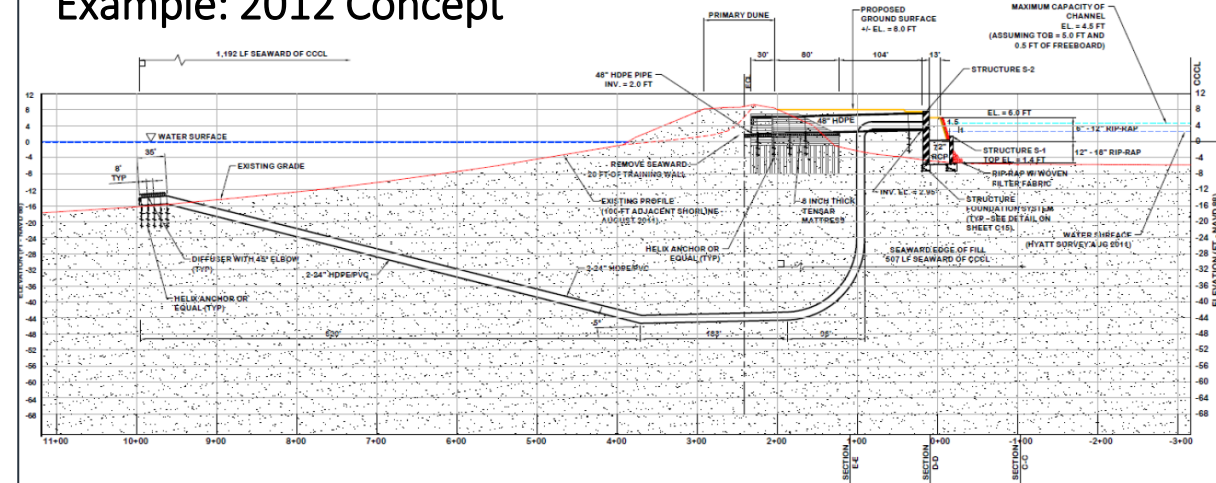

ALTERNATIVE 1: PIPE & PUMP SYSTEM

RAINFALL

- Add two stormwater pumps (70 cfs)

1" – 1 hr




2" – 1 hr

25 year rainfall
(8.18" – 24 hr)


100 year rainfall
(10" – 24 hr)

2-ft
0-ft

Existing
Conditions

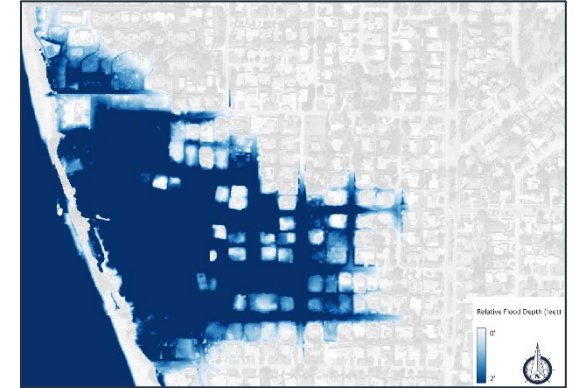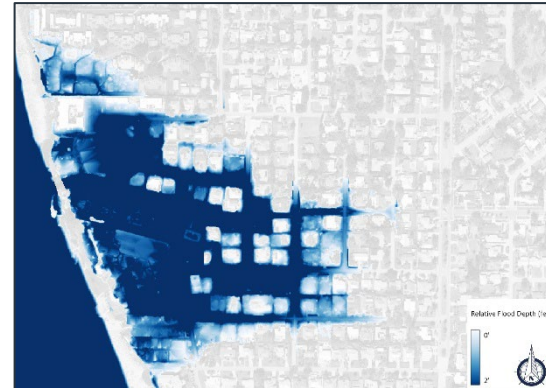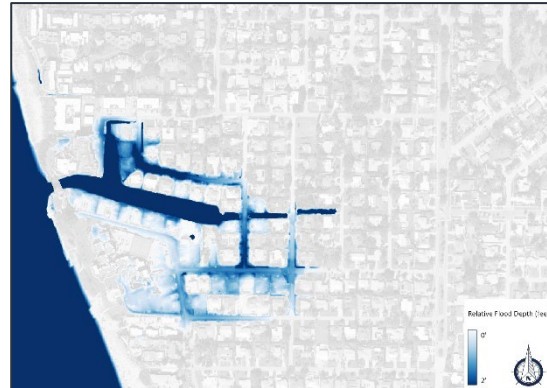

Alt 1
2 pumps

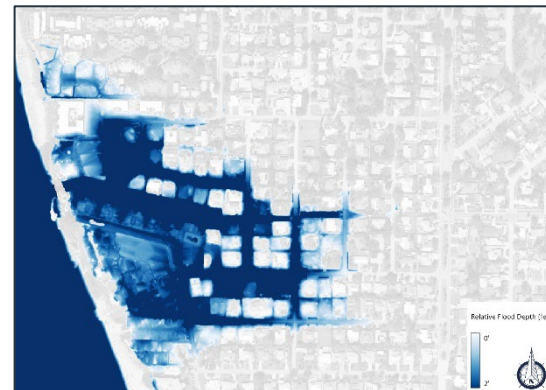

ALTERNATIVE 1: PIPE & PUMP SYSTEM

SURGE

- Add two stormwater pumps (70 cfs)

2-ft
0-ft





25 YR

50 YR





100 YR

50 YR + 10 YR Rain
(6.59" – 1 hr)

Existing
Conditions

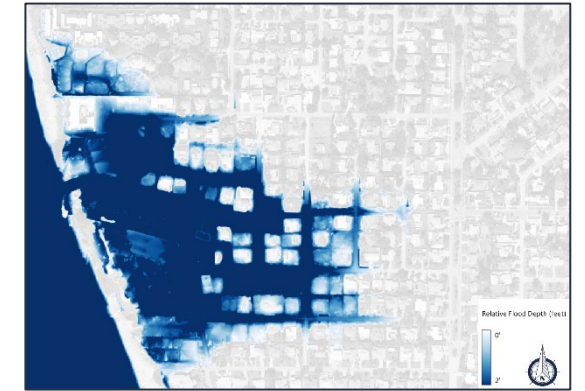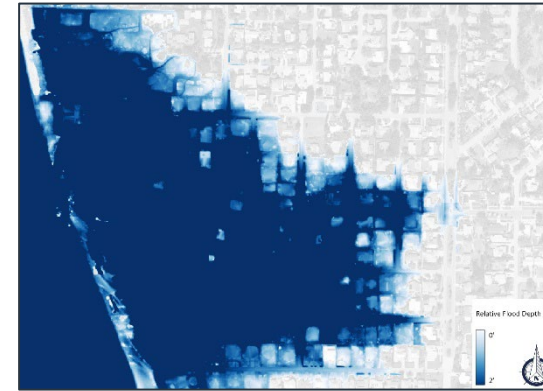
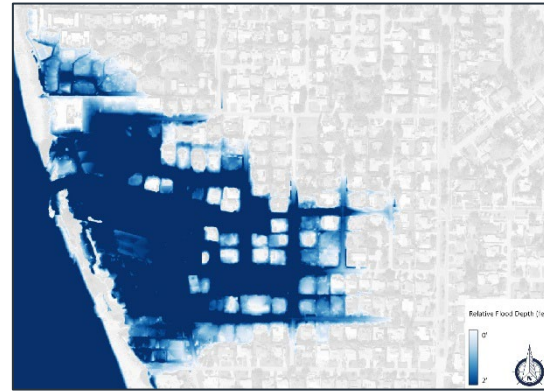
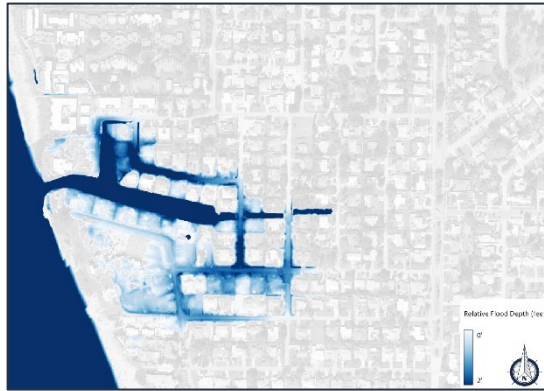


Alt 1
2 pumps

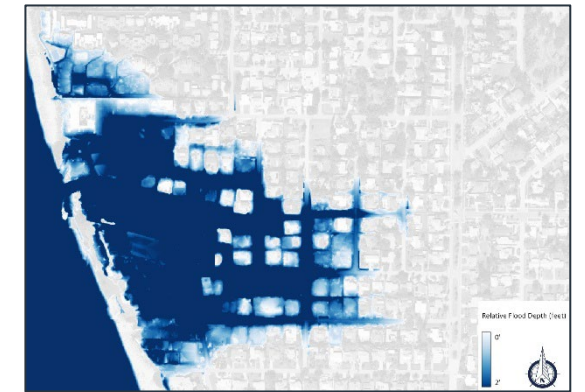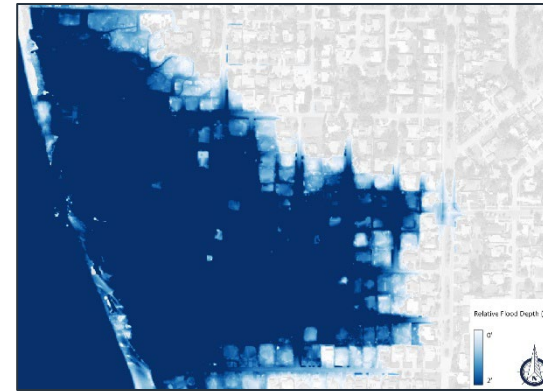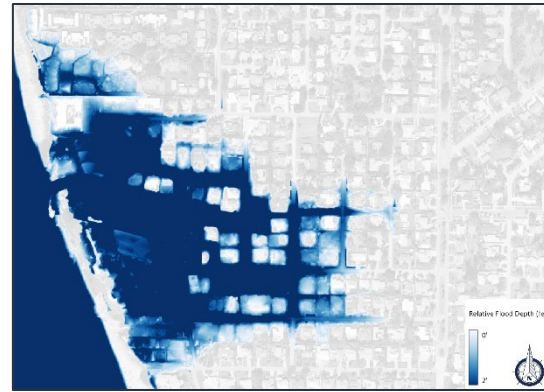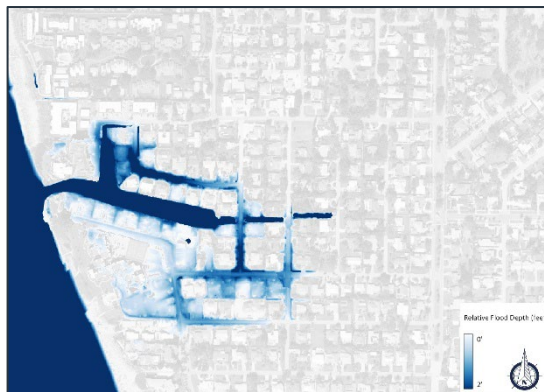

ALTERNATIVES ANALYSIS

- Alternative 2
 - Drain: none
 - Elevate: Raise neighborhood elevation to > 9-ft NAVD
 - FEMA flood 8' with City requirement +1' above FEMA
 - Storage: none
 - Upstream Improvements: none
 - Block: none
- Results:
 - Reduces flooding in rainfall and surge events.
 - Include for further analysis.

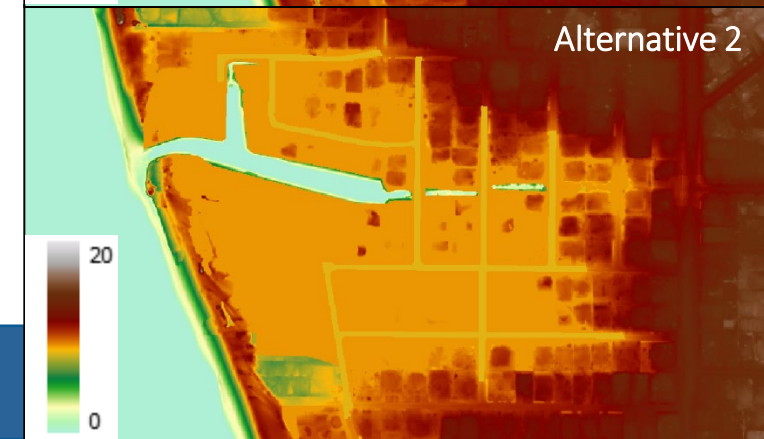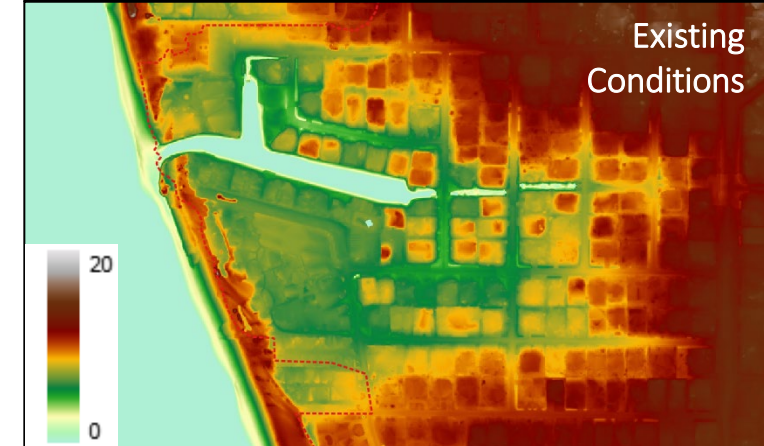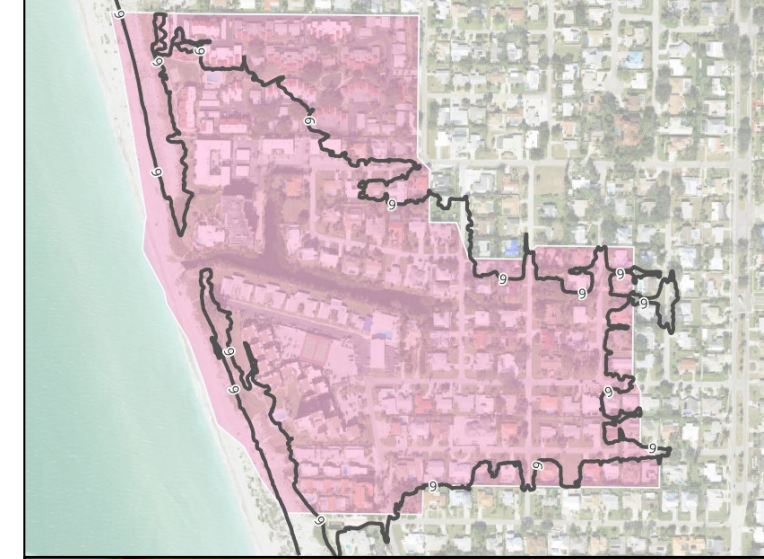

ALTERNATIVE 2: ELEVATE

RAINFALL

- Raise neighborhood elevation to > 9-ft NAVD

1" – 1 hr




2" – 1 hr

25 year rainfall
(8.18" – 24 hr)

100 year rainfall
(10" – 24 hr)

2-ft
0-ft

Existing
Conditions

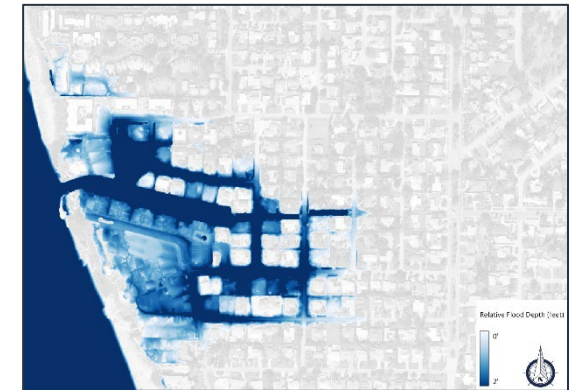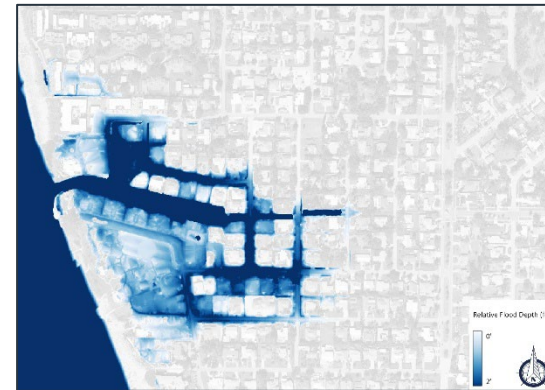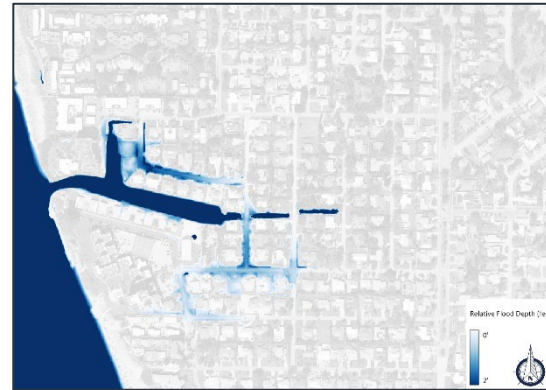


Alt 2



ALTERNATIVE 2: ELEVATE

SURGE

- Raise neighborhood elevation to > 9-ft NAVD







50 YR + 10 YR Rain
(6.59" – 1 hr)

25 YR



50 YR

100 YR

Existing
Conditions

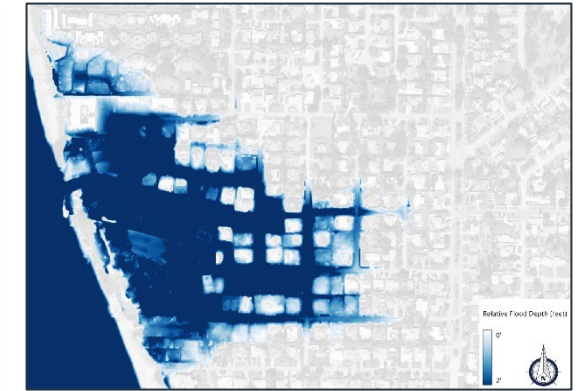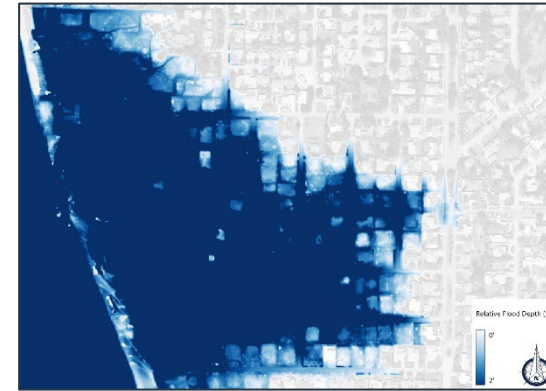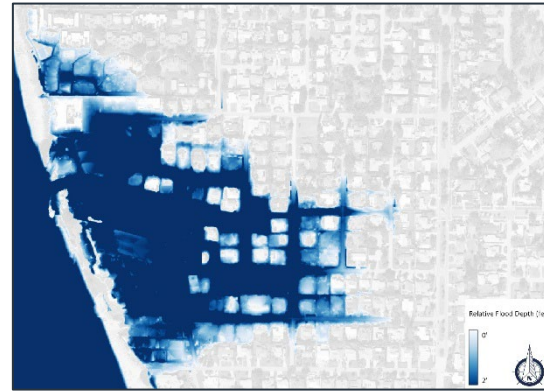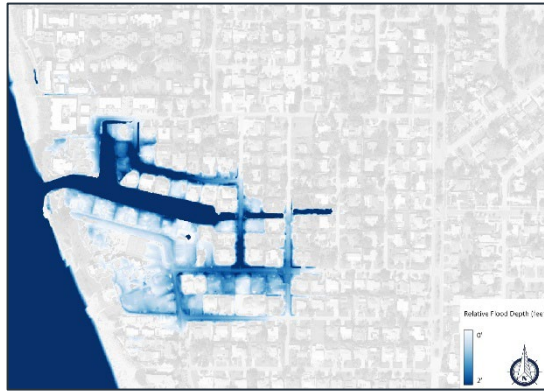

Alt 2

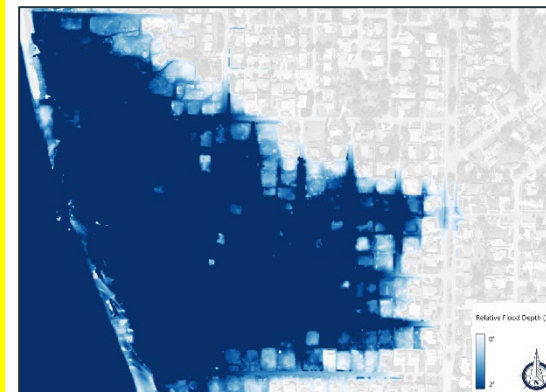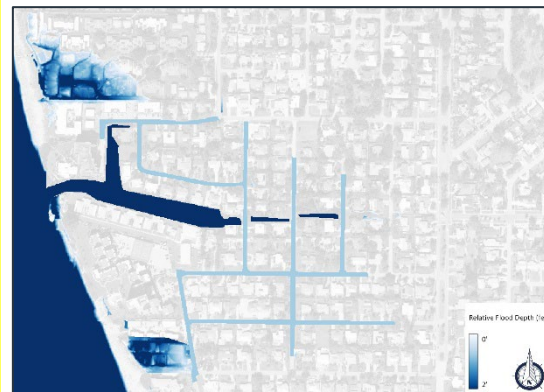

ALTERNATIVES ANALYSIS

- Alternative 3
 - Drain: none
 - Elevate: none
 - Storage: Increase storage capacity
 - 0.25 acre, 0.5 acre, 1 acre, 1.5 acre and 2.0 acre
 - Upstream Improvements: none
 - Block: none
- Results:
 - Little improvement upon existing conditions
 - Include for further analysis in combination with other alternatives



Note: +5.5 ft contour shown in yellow.

ALTERNATIVE 3: STORAGE

- **Flamingo Ditch Storage Capacity ~276,000 cubic feet**
 - Static water level (+1.4') to the +5.5' contour.
 - Not including the streets and ditches east of Gardenia
- **1" Rainfall Event - Net Inflow Volume ~346,000 cubic feet**
 - Peak stage at +4.6' NAVD88 with outfall closed
 - Adding 2 acres decreases water levels by ~1 ft for a 1" rain event
- **2" Rainfall Event - Net Inflow Volume ~660,000 cubic feet**
 - Peak stage at +6.5' NAVD88 with outfall closed
 - Adding 2 acres decreases water levels by ~0.5 ft for a 2" rain event
- Ditch storage capacity is exceeded for minor rain events with closed outfall
- Excess storage capacity currently comes from the streets and open channels (flooding)



Note: +5.5 ft contour shown in yellow.

ALTERNATIVES ANALYSIS

- Alternative 4
 - Drain: none
 - Elevate: none
 - Storage: none
 - Upstream Improvements: Retention pond
 - Existing pipe junction
 - Block: none
- Results:
 - Little improvement upon existing conditions
 - Not included for further analysis



ALTERNATIVE 4: UPSTREAM IMPROVEMENTS

RAINFALL

- Add upstream retention pond

1" – 1 hr




2" – 1 hr

25 year rainfall
(8.18" – 24 hr)



100 year rainfall
(10" – 24 hr)

2-ft
0-ft

Existing
Conditions

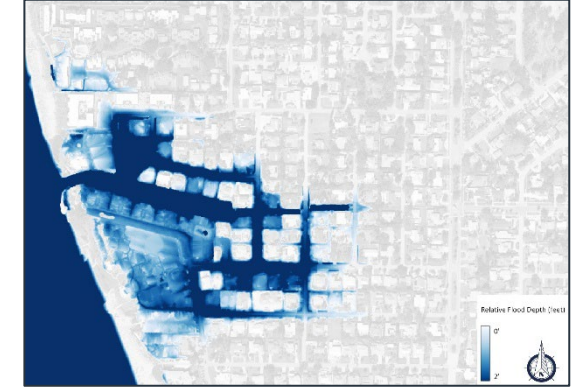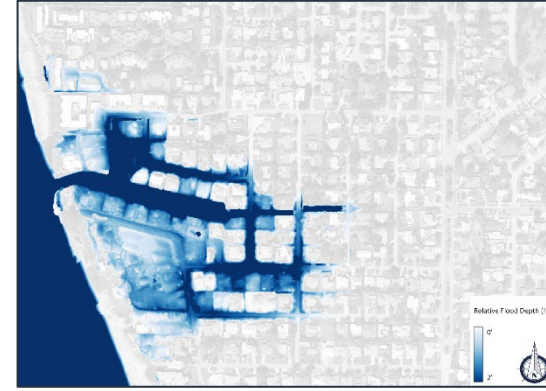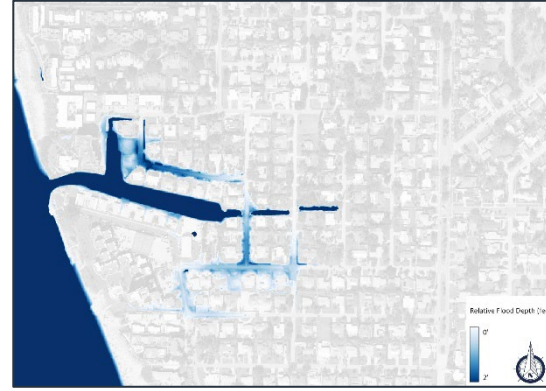


Alt 4

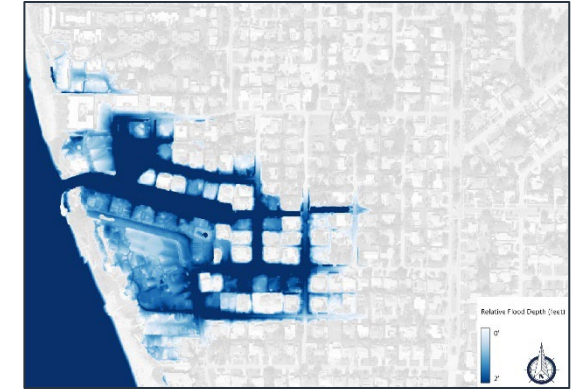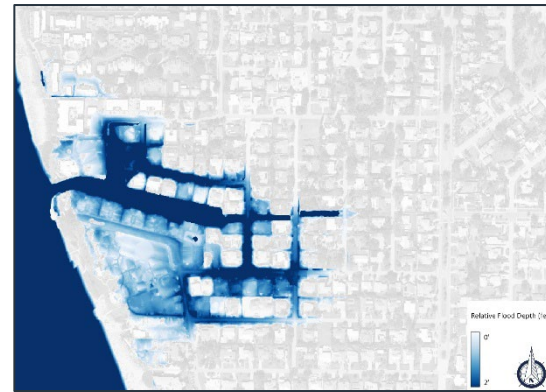

Note: No difference in surge results between existing conditions and Alt 4.

ALTERNATIVES ANALYSIS


- Alternative 5
 - Drain: triple pipes (gravity, one-way)
 - Two 36" pipes and one 48" pipe
 - Elevate: none
 - Storage: none
 - Upstream Improvements: none
 - Block: Dunes/Seawall
 - Existing dune elevation (+10-ft)
- Results:
 - Some improvement in reducing storm surge impacts
 - Increases flooding from rainfall due to adverse trapping effect
 - Include for further analysis only if used in combination with other alternatives

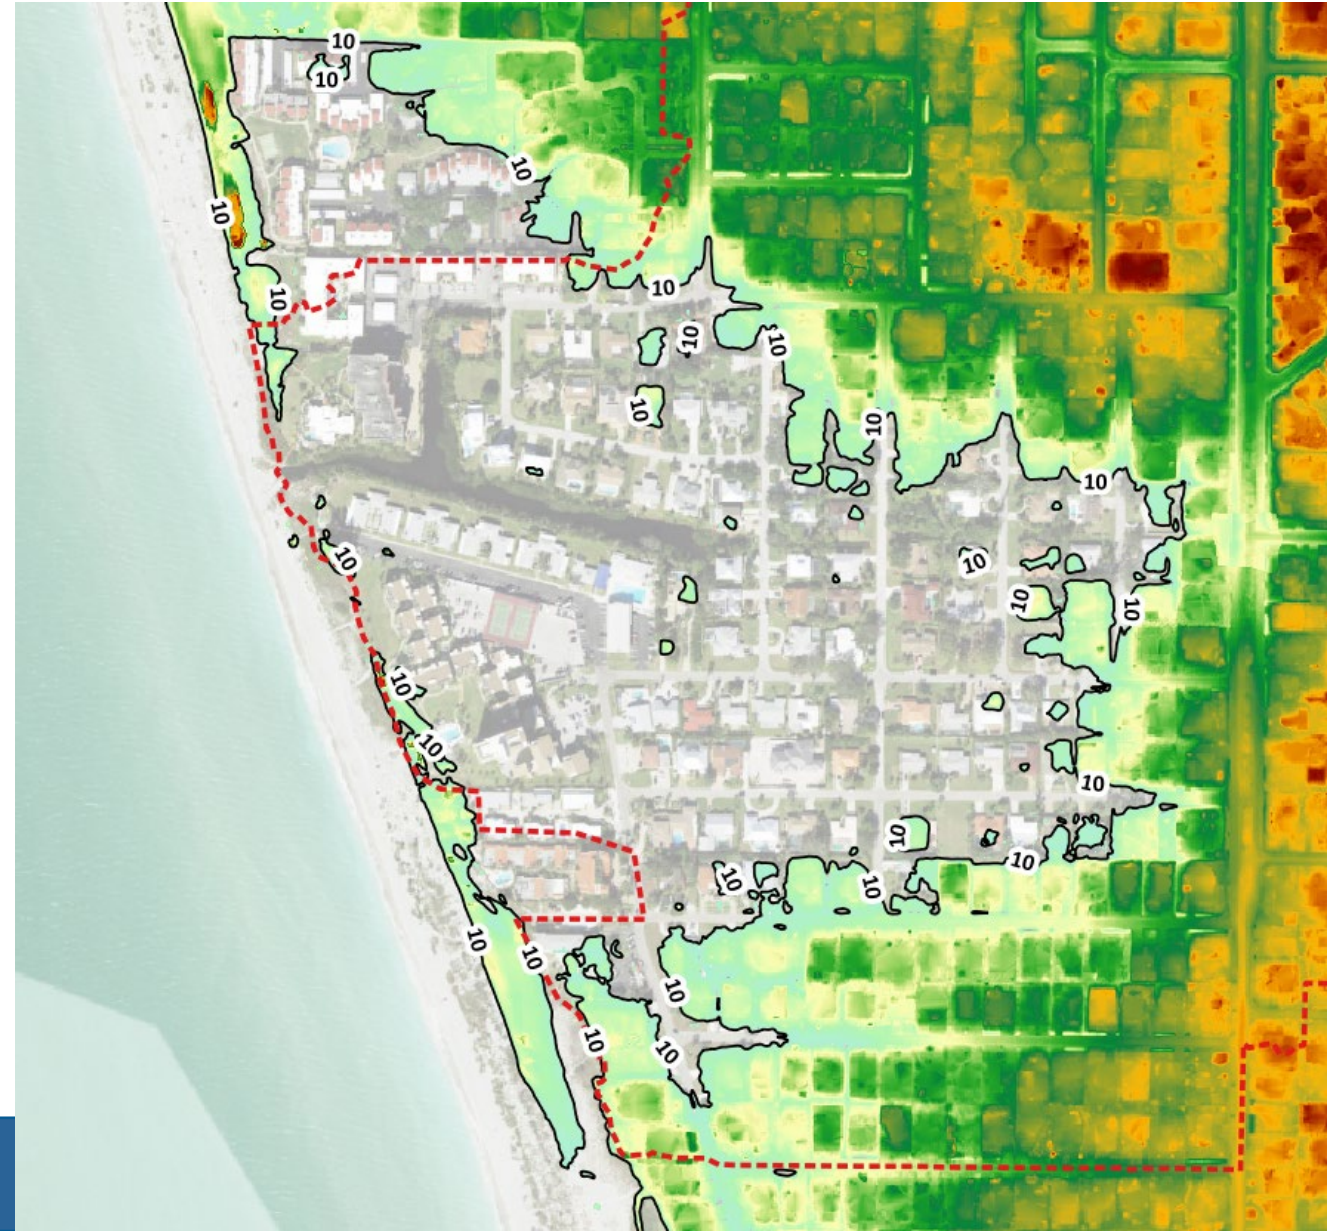

ALTERNATIVE 5: DUNE/SEAWALL

RAINFALL

- Block at existing dune elevation, approximately +10 ft, with 3 pipes






1" – 1 hr

2" – 1 hr



25 year rainfall
(8.18" – 24 hr)

100 year rainfall
(10" – 24 hr)

Existing
Conditions

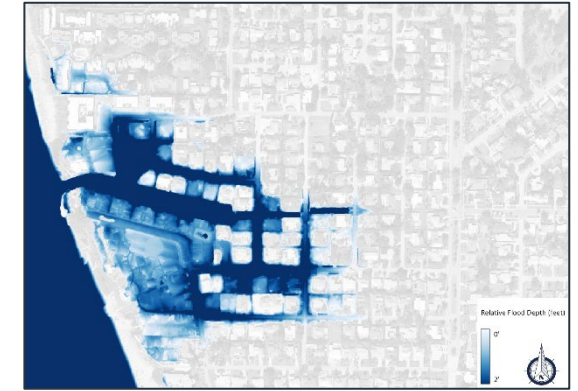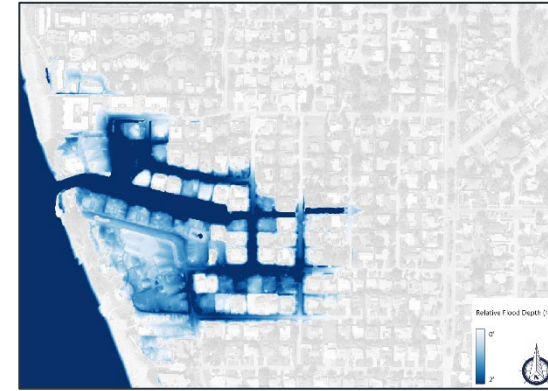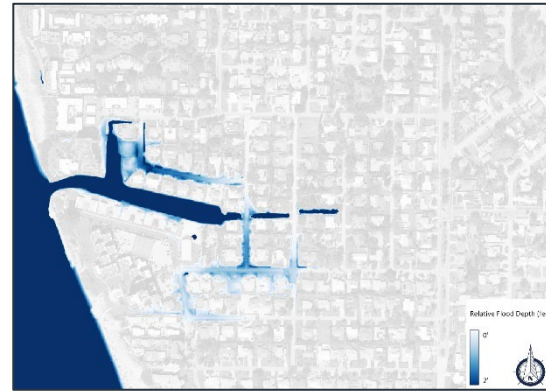


Alt 5

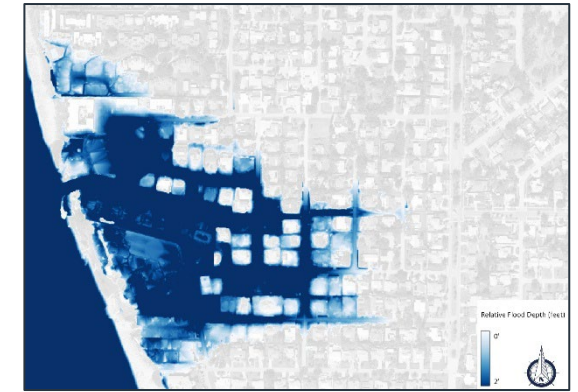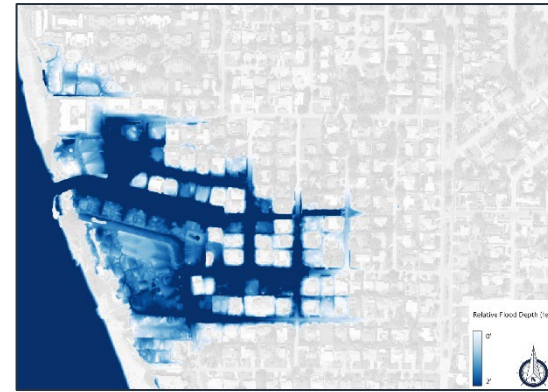

ALTERNATIVE 5: DUNE/SEAWALL

SURGE

- Block at existing dune elevation, approximately +10 ft, with 3 pipes







50 YR + 10 YR Rain
(6.59" – 1 hr)

25 YR



50 YR

100 YR

Existing
Conditions

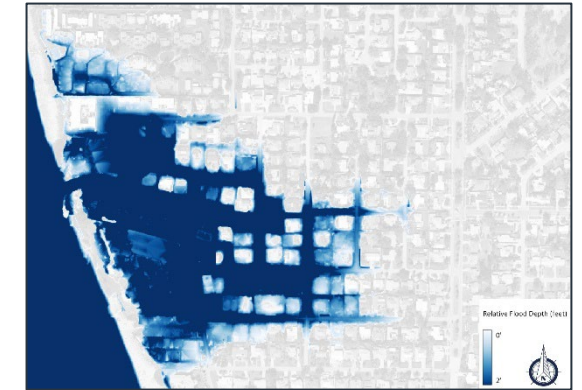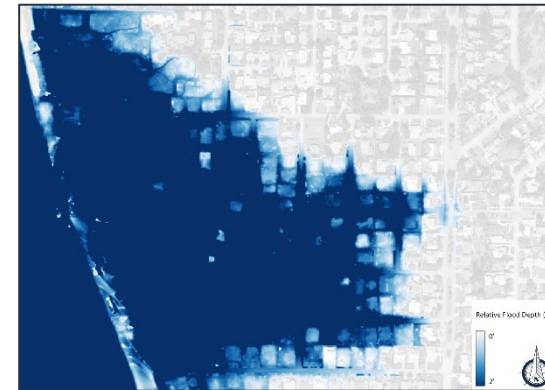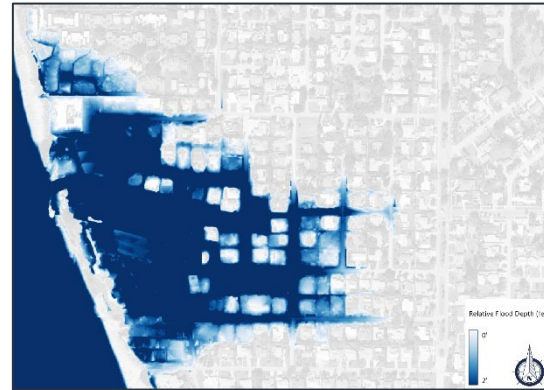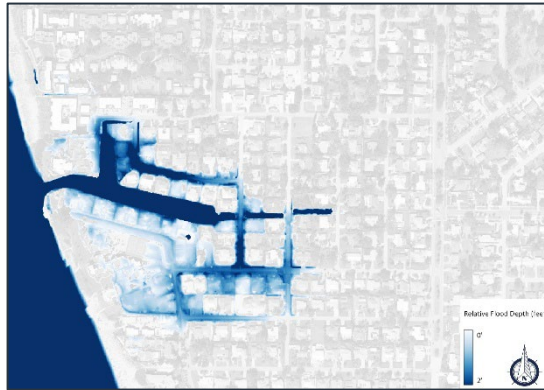

Alt 5

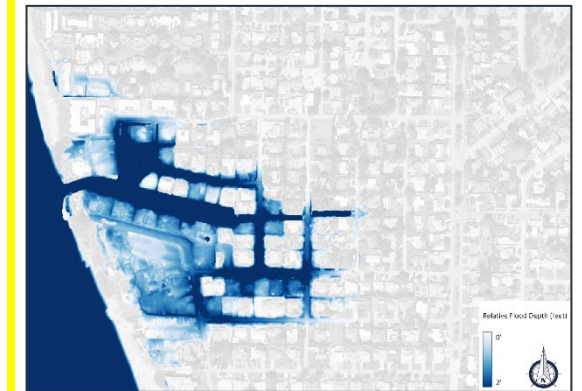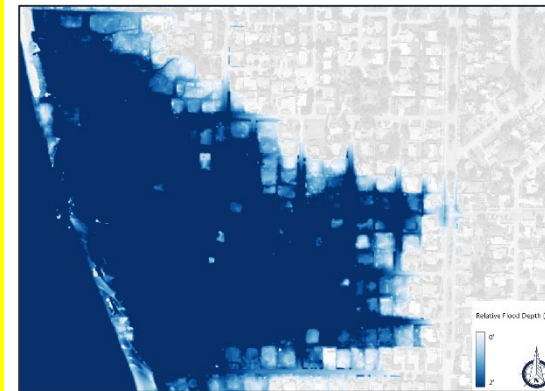

EVALUATION MATRIX: INITIAL ALTERNATIVES

Alternative	Technical Effectiveness	Relative Cost	Ownership Challenges	Operations & Maintenance	Liability & Risk	Permitting Feasibility
1 – Pump to Gulf	Yellow	Red	Red	Red	Red	Yellow
2 – Elevate	Green	Red	Red	Green	Yellow	Green
3 – Storage Capacity	Yellow	Red	Red	Yellow	Green	Green
4 – Upstream Improvements	Red	Red	Red	Yellow	Green	Yellow
5 – Dune/Seawall	Yellow	Green	Green	Yellow	Red	Yellow

Note: All ranking and costs are provided for discussion and comparison purposes only.

■ Ranking:

- Red – Not likely to meet objectives
- Yellow – May meet some objectives
- Green – Most likely to meet objectives

■ Relative Cost Ranges:

- Red – Greater than \$5M
- Yellow – Between \$1M and \$5M
- Green – Less than \$1M

EVALUATION MATRIX: POTENTIAL COMPONENTS

Alternative	Technical Effectiveness	Relative Cost	Ownership Challenges	Operations & Maintenance	Liability & Risk	Permitting Feasibility
1 – One-way Pipes						
2 – Elevate Roads						
3 – Storage Capacity						
4 – Upstream Improvements						
5 – Dune						

Note: All ranking and costs are provided for discussion and comparison purposes only.

■ Results suggest further consideration of the following components:

- Alt 1 – Piping with one-way valves
- Alt 2 – Elevate roads adjacent to ditch
- Alt 3 – Add storage in available location(s)
- Alt 4 – Upstream improvements (deferred)
- Alt 5 – Build dune (only in combination with drainage)

COMBINE SELECTED COMPONENTS



Drain

One-way pipes



Elevate

Raise road
elevation



Storage

Increase capacity
at ditch




Upstream Improvements

Defer



Block

Dune

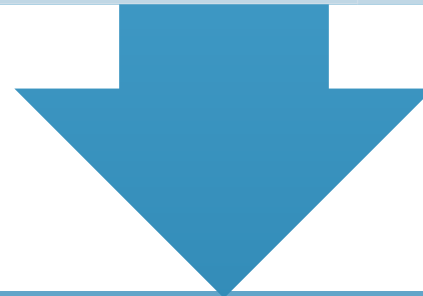

Combined Alternatives 6a, 6b, 7a, 7b

COMBINED ALTERNATIVES ANALYSIS

- Alternative 6a and 6b
 - **Drain:** without outfall pipe (Alt 6a) and with 555' long 36" outfall pipe with drop structure (Alt 6b)
 - **Elevate:** Raise road sections on Flamingo Drive and Villas/Gardenia to +5'
 - **Storage:** 0.5 acre added
 - Upstream Improvements: none
 - **Existing Pipe Improvements:**
 - Flamingo Drive Pipe: made one way
 - Villas Drive Pipe: made one way
 - Block: none
- Results:
 - Alt 6a (no pipe): No significant effect on rainfall or surge
 - Alt 6b (with pipe): No significant benefit for large rain events
 - Storm surge not evaluated with this alternative (no dune component)



ALTERNATIVE 6A: COMBINATION

RAINFALL

- Elevate + Storage + Pipe Improvements

1" – 1 hr



2" – 1 hr

25 year rainfall
(8.18" – 24 hr)




100 year rainfall
(10" – 24 hr)

2-ft
0-ft

Existing
Conditions

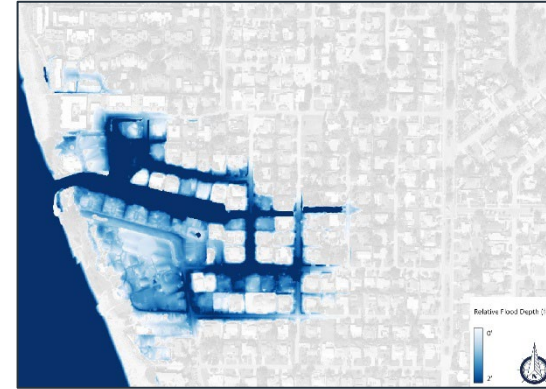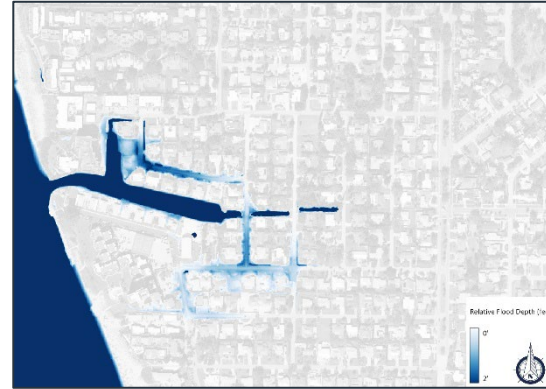


Alt 6a
(w/o pipe)

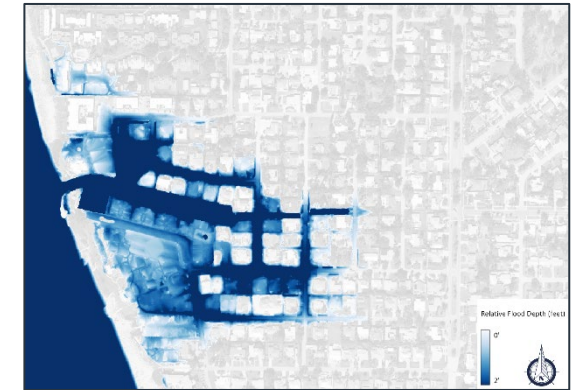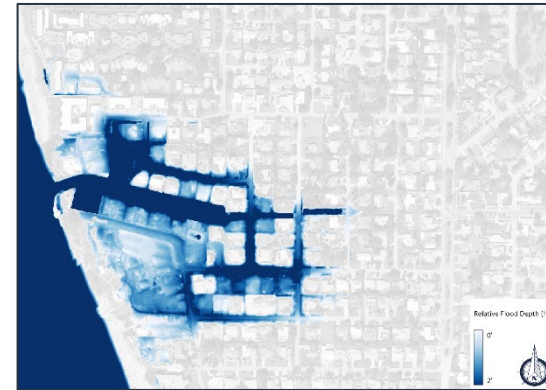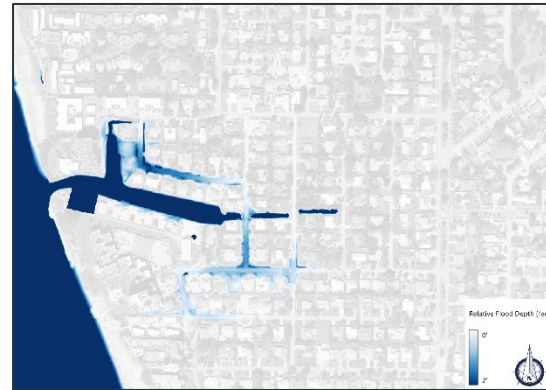

ALTERNATIVE 6B: COMBINATION

RAINFALL

- Elevate + Storage + Pipe Improvements + Outfall Pipe (gravity)






1" – 1 hr

2" – 1 hr



25 year rainfall
(8.18" – 24 hr)

100 year rainfall
(10" – 24 hr)

Existing
Conditions

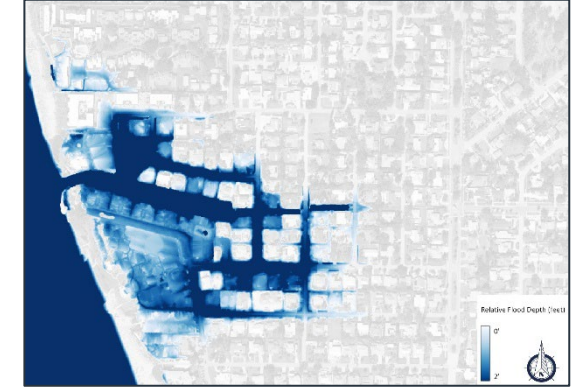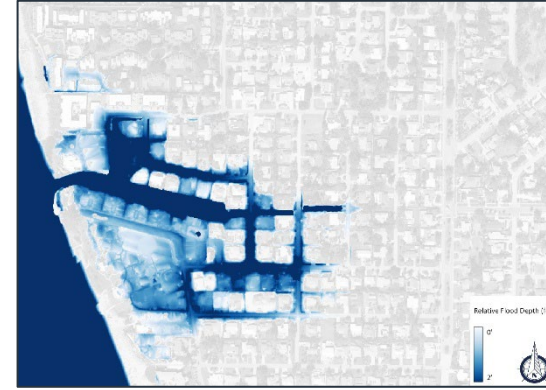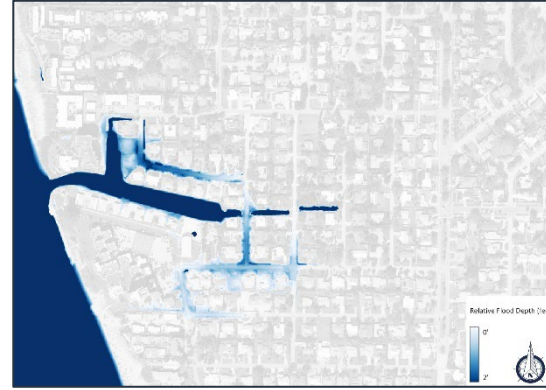

Alt 6b
(w/pipe)

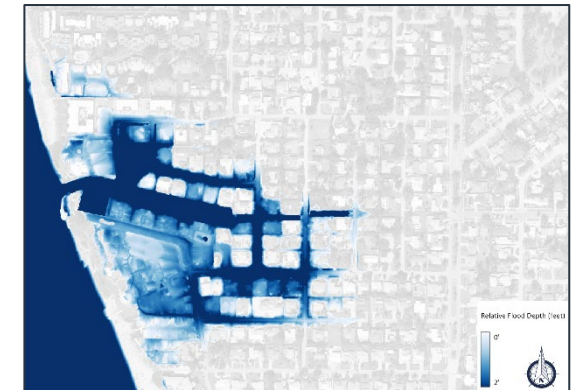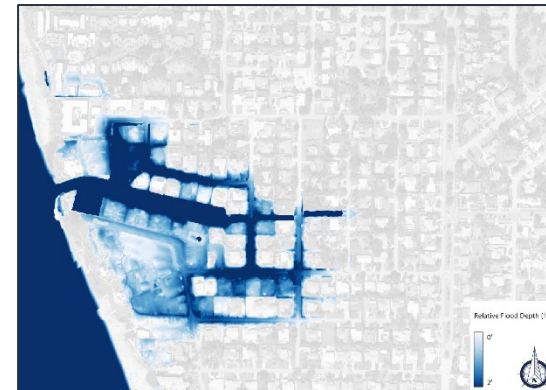

COMBINED ALTERNATIVES ANALYSIS

- Alternative 7a and 7b
 - Drain: none
 - **Elevate:** Road sections on Flamingo Drive and Villas/Gardenia raised to +5'
 - **Storage:**
 - Converted Lot 2 BLK 11 of Golden Beach Development (~0.24 acres)
 - 10' wide berm at +5.5, side slopes of 1:2 to -5
 - Upstream Improvements: none
 - **Existing Pipe Improvements:**
 - Flamingo Drive Pipe: made one way, pipe increased from 15" to 18" size
 - Villas Drive Pipe: made one way, pipe size stays the same
 - **Block:** Existing berm +5 ft (Alt 7a) and large dune +15 ft (Alt 7b)
- Results:
 - Alt 7a (no dune): Minor benefit to rainfall flooding and no effect on surge
 - Alt 7b (dune): Dune blocks surge but also blocks drainage of rainwater. Obstructs view for first story structures and does not address other pathways.
 - An opening to drain stormwater is needed in combination with a dune



ALTERNATIVE 7A: COMBINATION

RAINFALL

- Elevate + Storage + Pipe Improvements

1" – 1 hr




2" – 1 hr

25 year rainfall
(8.18" – 24 hr)




100 year rainfall
(10" – 24 hr)

2-ft
0-ft

Existing
Conditions

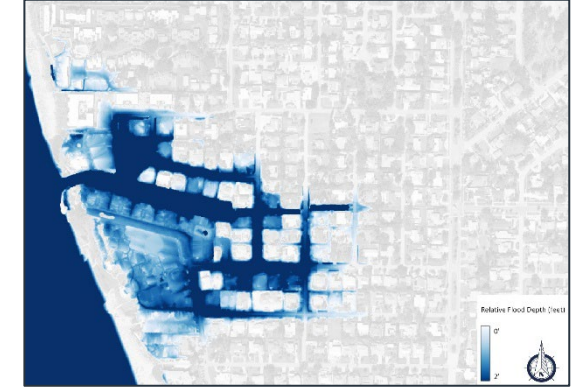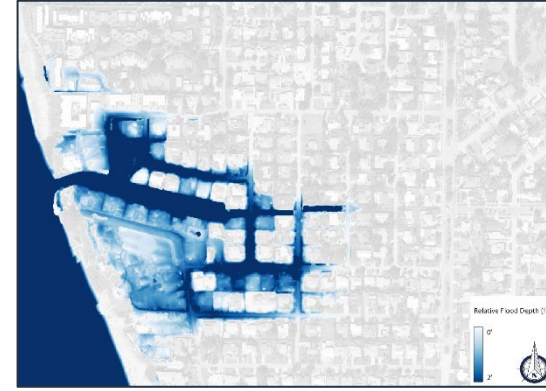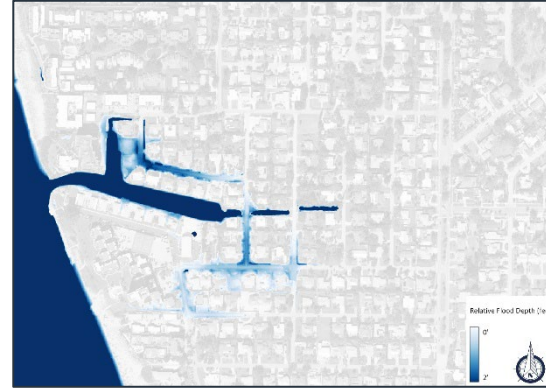

Alt 7a
(w/o dune)

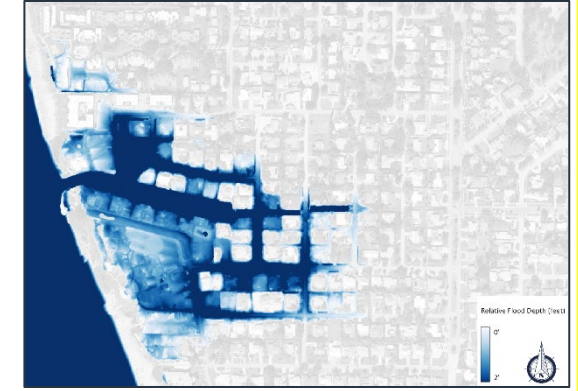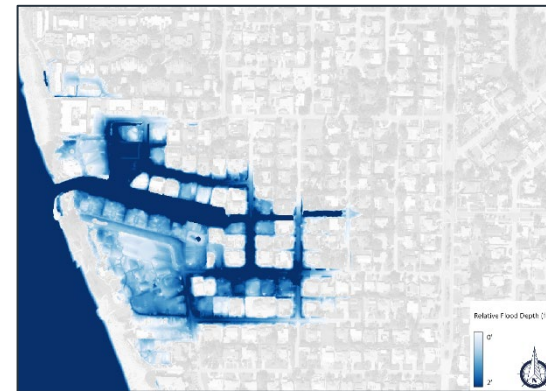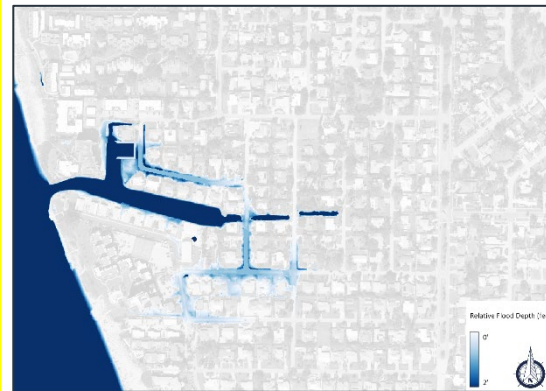

ALTERNATIVE 7B: COMBINATION

RAINFALL

- Elevate + Storage + Improvements + Block (+15 ft Dune)

1" – 1 hr




2" – 1 hr

25 year rainfall
(8.18" – 24 hr)




100 year rainfall
(10" – 24 hr)

2-ft
0-ft

Existing
Conditions

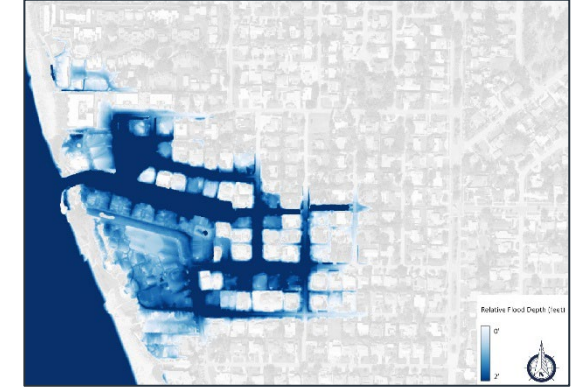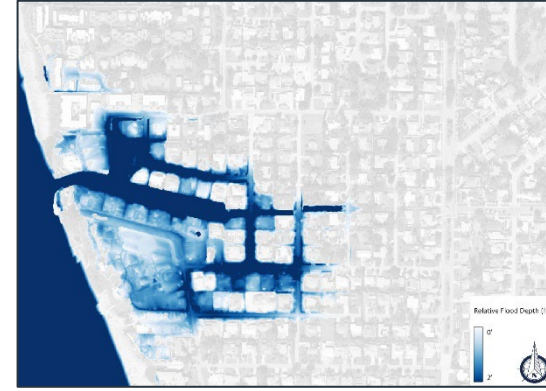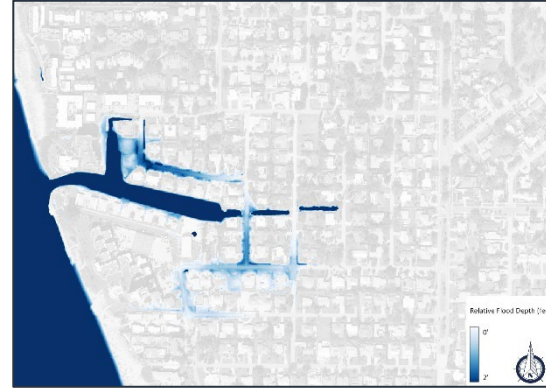


Alt 7b
(w/ dune)

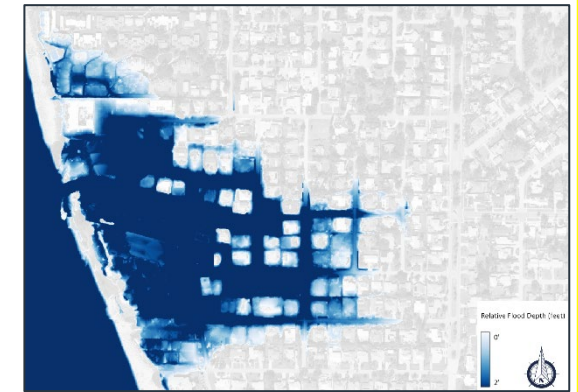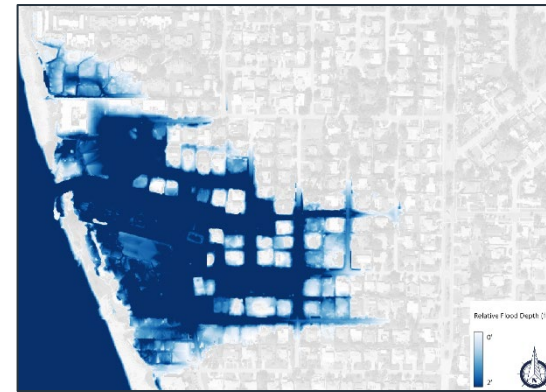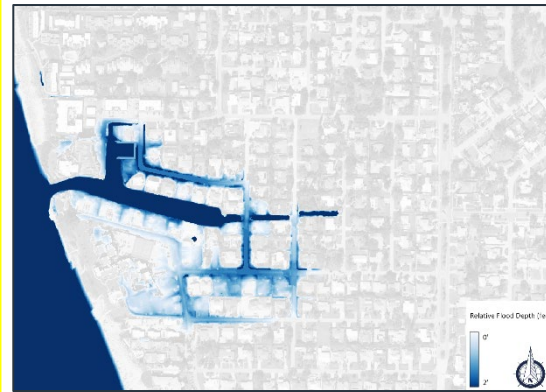

ALTERNATIVE 7A: COMBINATION

SURGE

- Elevate + Storage + Improvements + Block (+5 ft Berm*)







50 YR + 10 YR Rain
(6.59" – 1 hr)

25 YR





50 YR

100 YR

Existing
Conditions

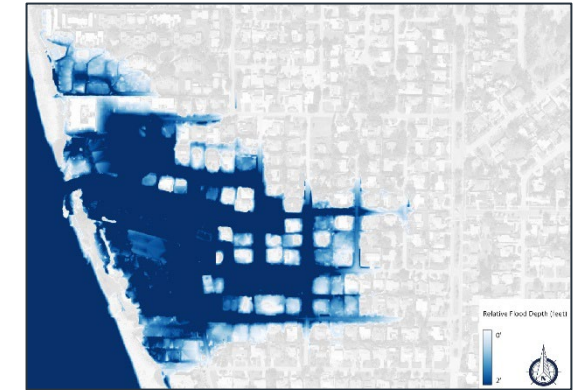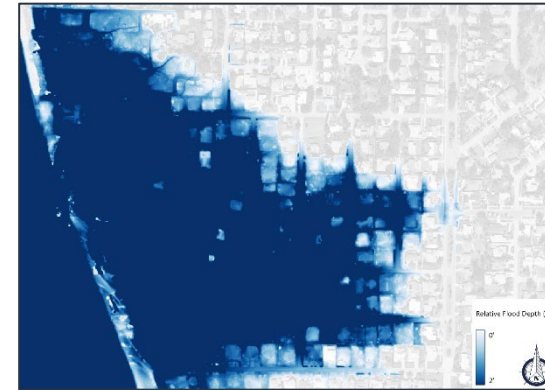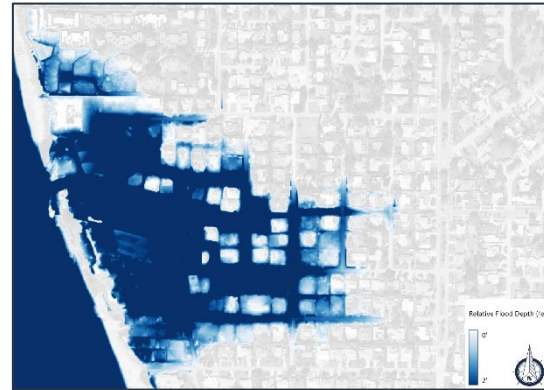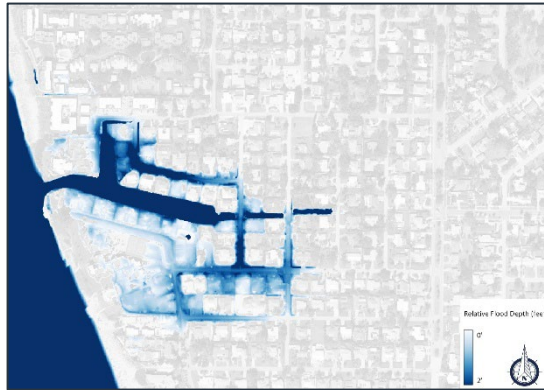

Alt 7a

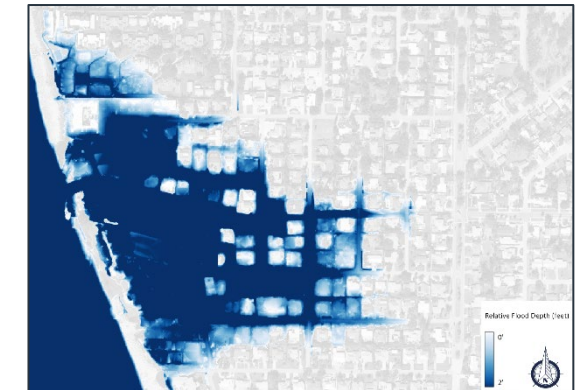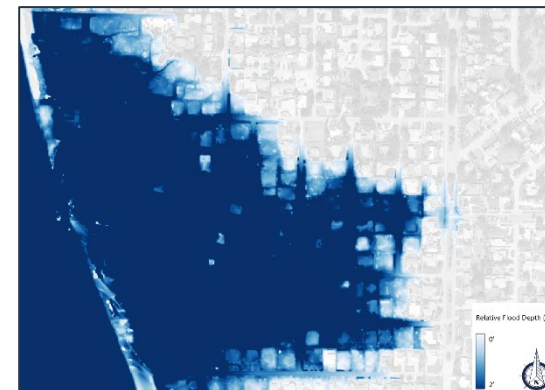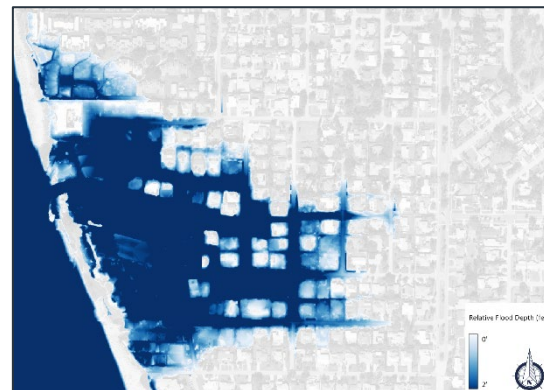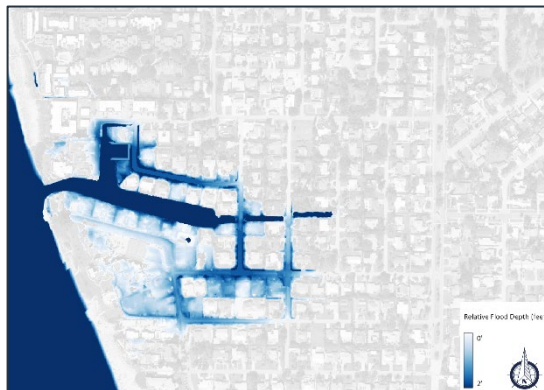

*Alt 7b with 15 ft dune blocks surge events but traps water from rainfall and other flood pathways.

GENERAL FINDINGS

- Flamingo Ditch is a regional geographic depression and natural wetland that is prone to flooding from minor rain events and modest storm surge.
- The margins for flooding are very thin and small amounts of water introduced to the system can exceed the ditch capacity.
- The surrounding properties are privately owned with a mix of single family and multi-family homes constructed on low lying land.
- The City's easement is limited to general maintenance along a 20-ft wide area down the centerline of the ditch.
- Relocating homes and returning the area back to a natural system is not feasible due to the level of development and private lands.
- A dune or seawall creates a barrier for surge protection but is likely to worsen flooding from rainfall.

TECHNICAL FINDINGS

- Model results suggest the following:
 - Elevating the entire area to above +9 ft NAVD can reduce flooding up to a 100 yr rain event and 50 yr storm surge event.
 - Reasonably sized pumps (35-70 cfs) will not keep up with rainfall or surge and massive pumps (500 cfs) are not feasible.
 - Additional water storage areas would increase ditch capacity to better accommodate rainfall events but space to create new ponds is limited.
 - Storm surge with water levels up to a 50 yr event can be blocked from entering the ditch with a dune but the elevated dune traps water from discharging back to the Gulf.
- A phased approach may allow for improvements to address high frequency events while developing long term adaptations as part of other system-wide upgrades.
- All components are conceptual and require additional design, siting, engineering, permitting, and cost considerations for further development.

OVERALL STUDY FINDINGS

- The following concepts are provided for further discussion and development:
 - Raise City-owned roads to improve ingress/egress during nuisance flooding events and identify properties that may require modifications to meet new elevations (driveways, landscaping, etc.).
 - Install local stormwater system improvements to accommodate road modifications (replace pipes/grates, install one-way valves, swales, etc.) and seek easements for related actions.
 - Consider acquiring additional property along the ditch (i.e., empty parcel on Lot 2) to offset loss of road storage and increase overall basin capacity.
 - Approach the U.S. Army Corps of Engineers to discuss surge barrier options (beach berm, drainage, dune, wall) as it pertains to the federally-authorized Venice Beach Shore Protection Project.
 - Install publicly accessible (web-based) data collection system for real-time monitoring and early warning of rising water levels.
 - Consider other major improvements as potential components to the City's Stormwater Master Plan for rerouting/pumping water away from the ditch as part of system-wide upgrades.
 - Continue to pursue grant funding for short term improvements and major system upgrades.

DISCUSSION AND NEXT STEPS

- ✓ ■ Public comment period
- ✓ ■ Background information
- ✓ ■ Initial model set-up and review
- ✓ ■ Grant application
- ✓ ■ Additional data collection
- ✓ ■ Finalize model set-up
- ✓ ■ Build alternatives in model
- ✓ ■ Simulate a range of rain/surge events
- ✓ ■ Add/refine alternatives
- ✓ ■ Results and reporting



THANK YOU

